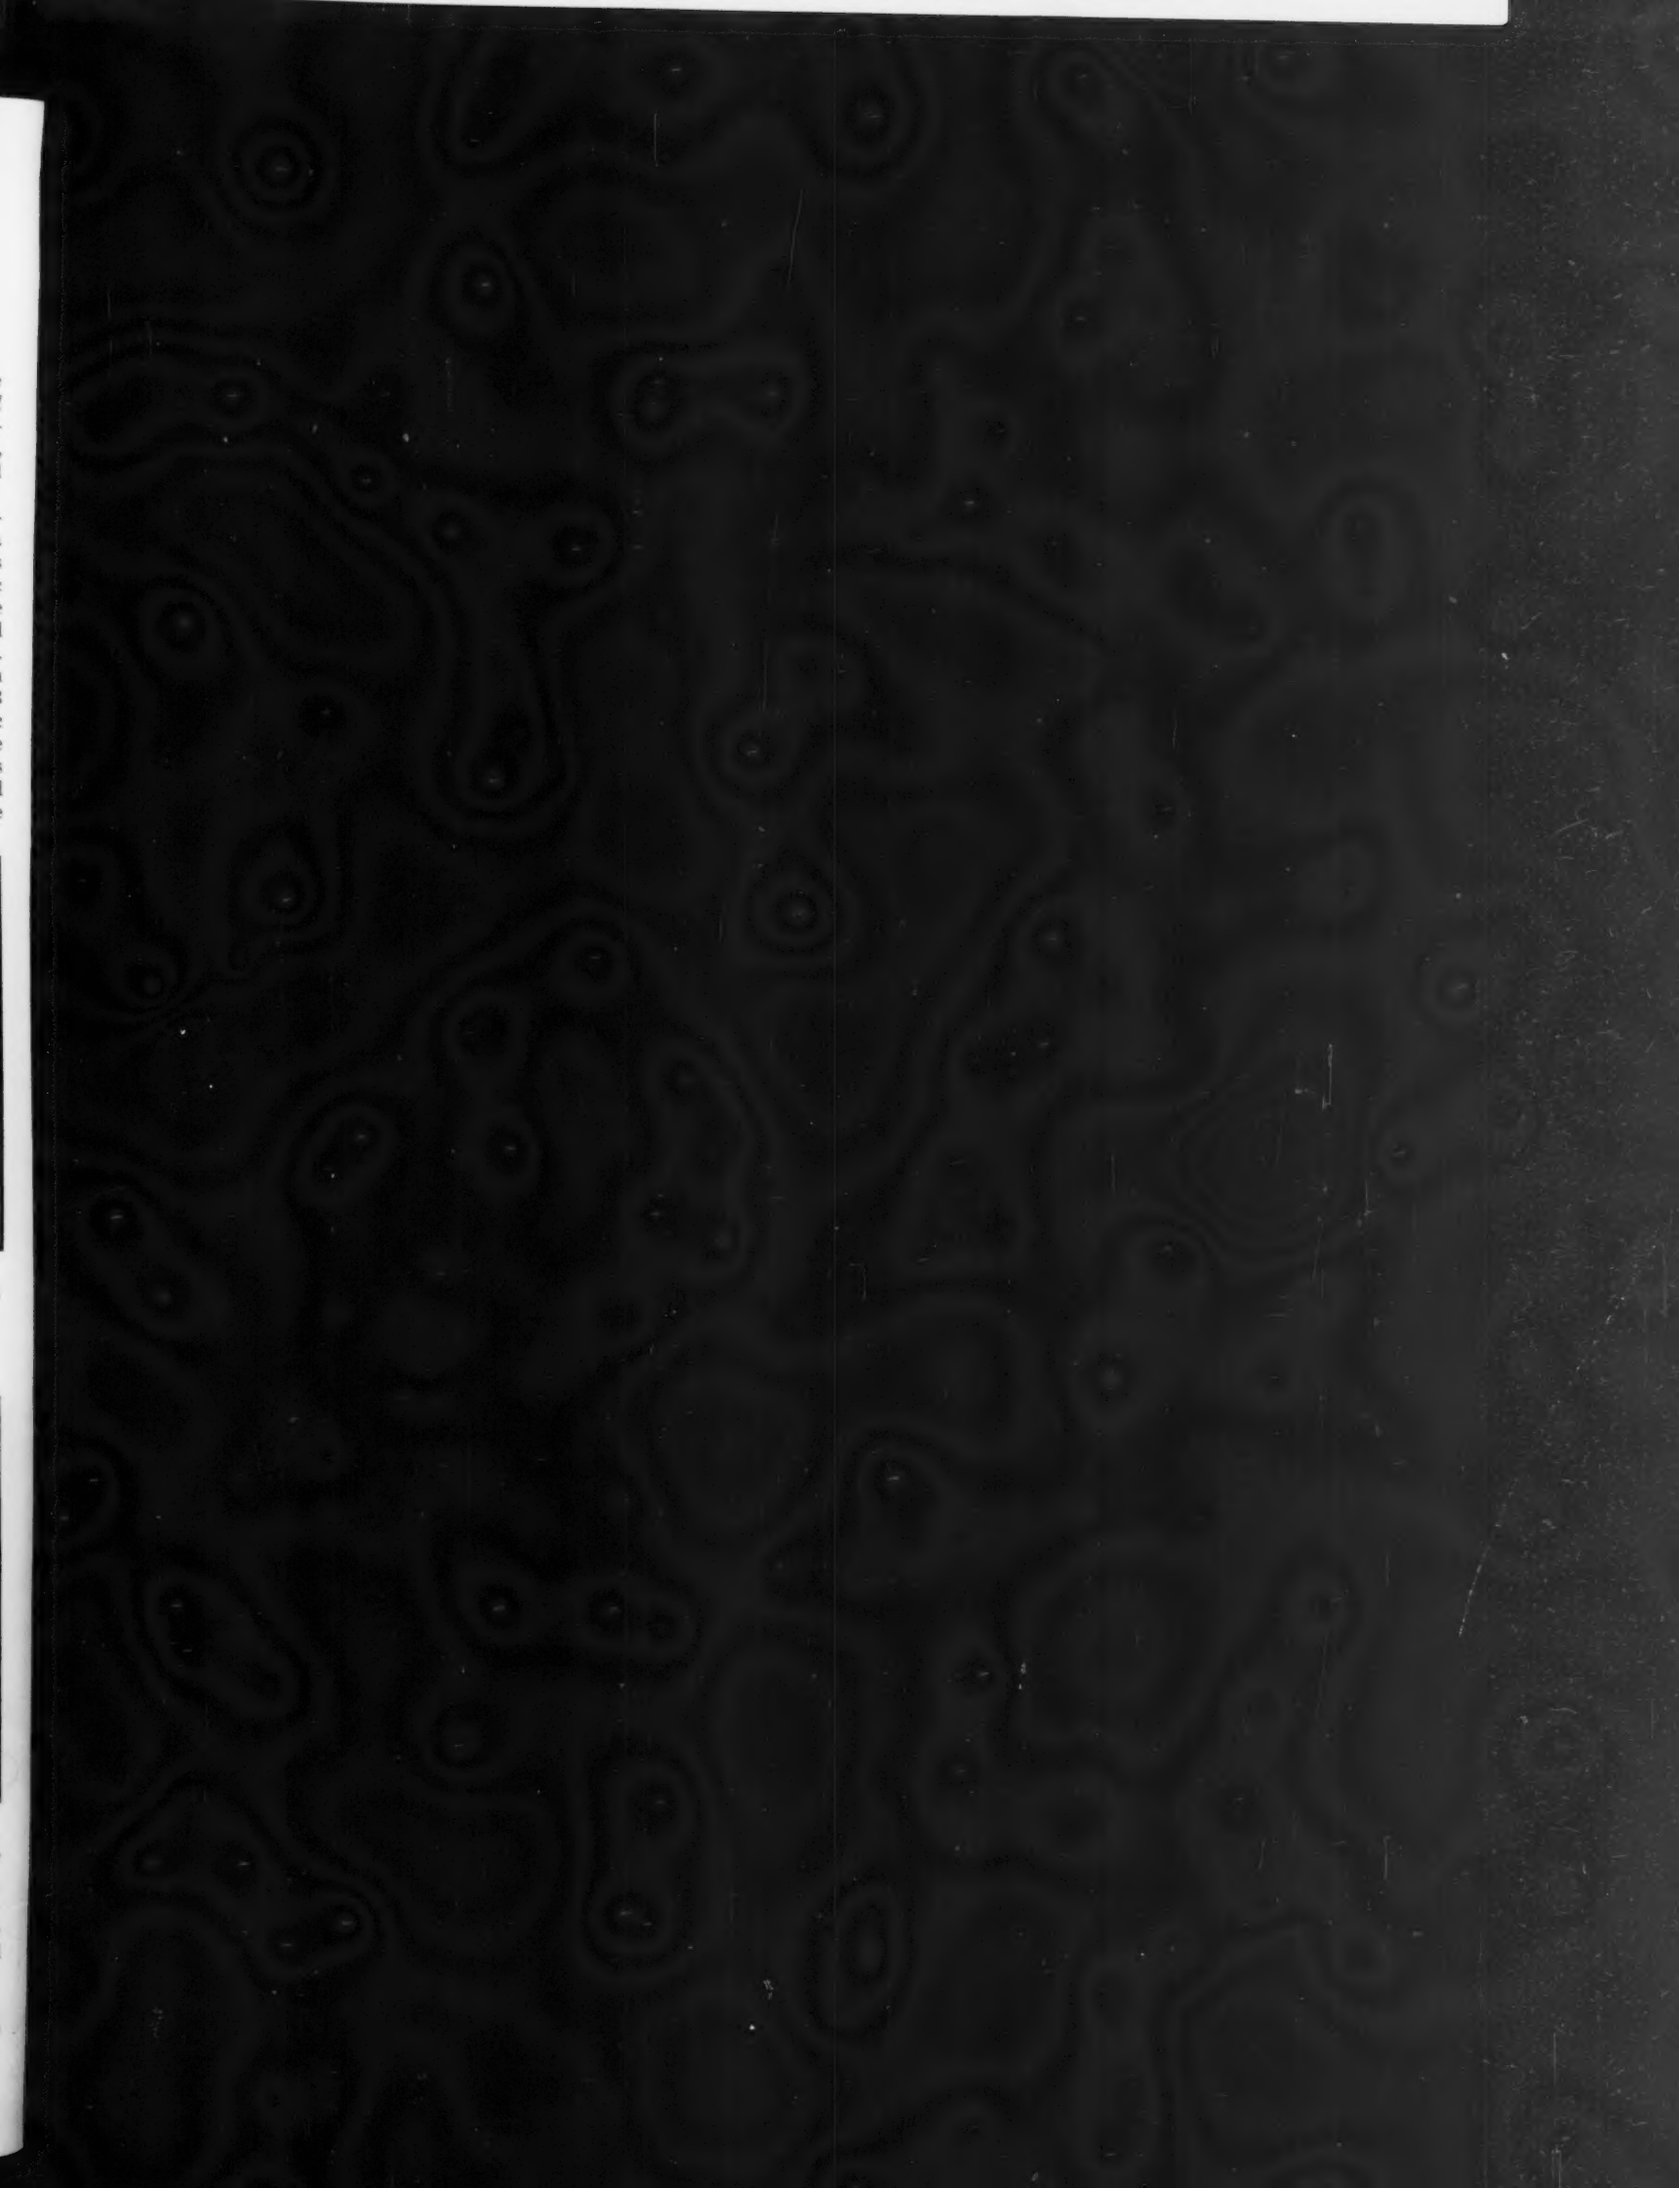

electronics

...io, communication, industrial applications of electron tubes . . . engineering and manufacture

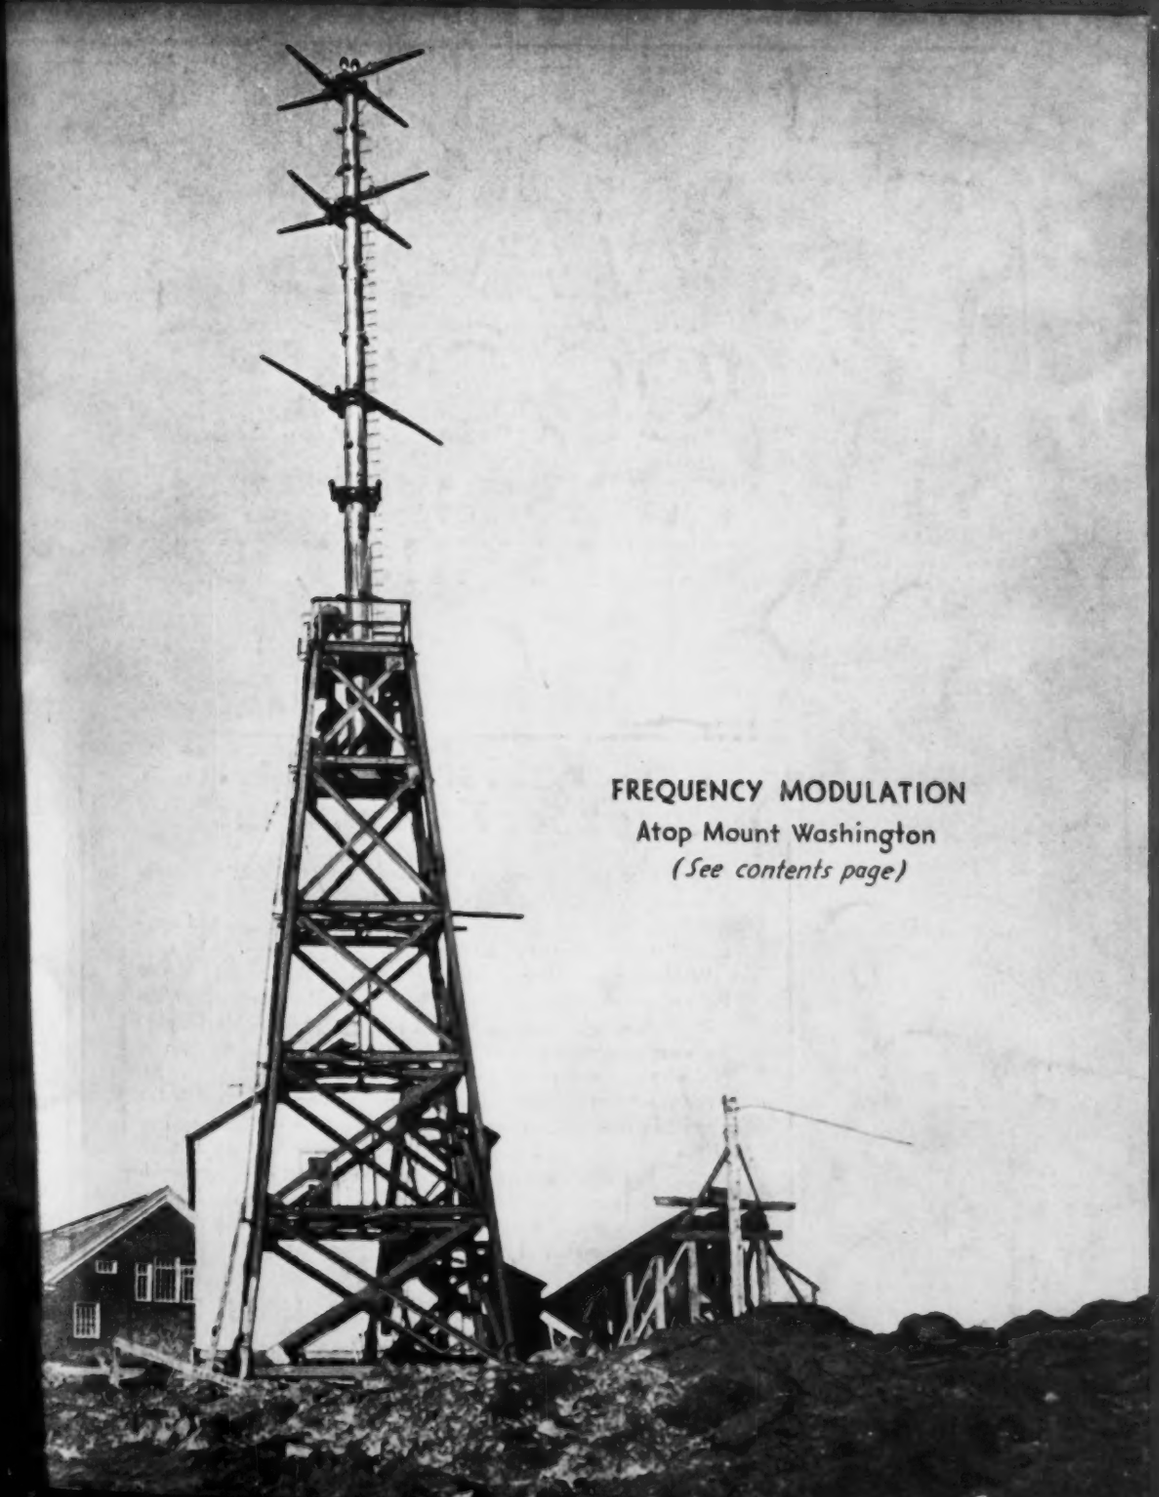

FREQUENCY MODULATION
Atop Mount Washington
(See contents page)

OCTOBER
1938

Price
50 Cents

McGRAW-HILL
PUBLISHING
COMPANY, INC.

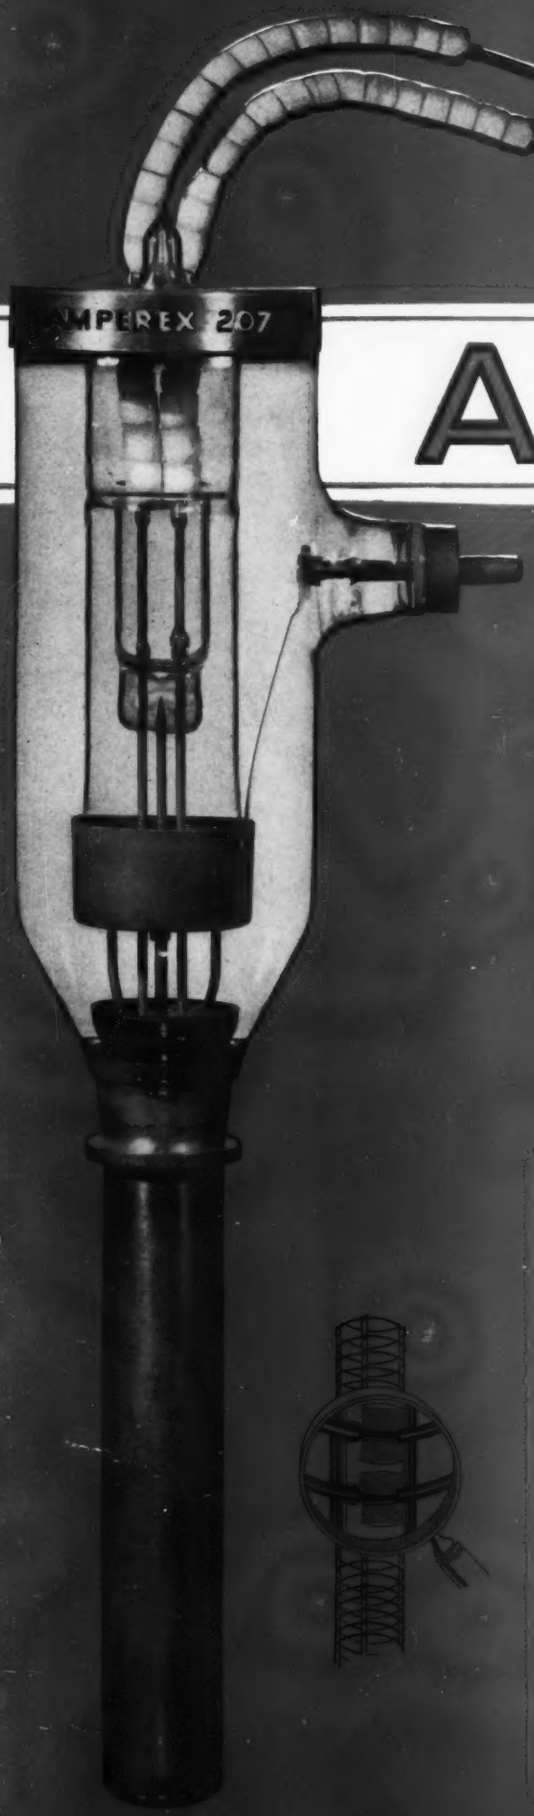

AMPEREX

WATER COOLED

TRANSMITTING and RECTIFYING TUBES

fine craftsmanship . . .
. . . expert workmanship

Characterize every element which enters into the construction of Amperex Water Cooled tubes. The painstaking thoroughness, precision and skill with which these elements are designed and engineered is best illustrated by the grid.

Welding, the customary method of attaching the fine grid wire to the supporting rods, is entirely eliminated. The intense heat developed in this process results in the formation of oxide films on the wires (a source of grid emission) and in the crystallization of grid wire and rod at the point of junction.

For the Amperex grids, a machine was developed which slots the supporting moly rods at accurate intervals determined by the pitch of the grid. The grid wire is securely swaged into these notches, forming a strong rugged grid free from brittleness due to crystallization and free from surface contamination because of any oxidation.

This minute attention to detail is a contributing factor to the outstanding performance of Amperex tubes.

AMPEREX ELECTRONIC PRODUCTS, INC.
79 WASHINGTON STREET BROOKLYN, NEW YORK



A McGRAW-HILL PUBLICATION

electronics

RADIO . . . COMMUNICATION AND INDUSTRIAL APPLICATIONS OF ELECTRON TUBES . . . DESIGN . . . ENGINEERING . . . MANUFACTURE

KEITH HENNEY
Editor

DONALD G. FINK
Managing Editor

BEVERLY DUDLEY
Associate Editor

HARRY PHILLIPS
Art Director

H. W. MATEER
Manager

ELECTRONICS, October, 1938, Vol. 11, No. 10. Published monthly, price 50c a copy. Subscription rates—United States and possessions, Canada, Mexico and Central American countries, $5.00 a year. All other countries, $6.00 a year or 24 shillings. Entered as Second Class matter, August 29, 1936, at Post Office, Albany, N. Y., under the Act of March 3, 1879.

Branch Offices: 520 North Michigan Ave., Chicago; 883 Mission St., San Francisco; Aldwych House, Aldwych, London, W. C. 2; Washington; Philadelphia; Cleveland; Detroit; St. Louis; Boston; Atlanta, Ga.

Contents Copyright, 1938, by McGraw-Hill Publishing Company, Inc.

McGRAW-HILL PUBLISHING COMPANY, INC.

JAMES H. McGRAW
Founder and Honorary Chairman

Publication Office
99-129 North Broadway, Albany, N. Y.

Editorial and Executive Offices
330 West 42nd Street, New York, N. Y.

James H. McGraw, Jr., President
Howard Ehrlich, Executive Vice President
Mason Britton, Vice Chairman
B. R. Putnam, Treasurer
D. C. McGraw, Secretary
J. E. Blackburn, Jr., Circulation Manager

Cable Address:
MCGRAWHILL, New York
Member A.B.P. Member A.B.C.

CONTENTS—OCTOBER 1938

FREQUENCY MODULATION RADIATOR ATOP MOUNT WASHINGTON ..... Cover
When Associate Editor Dudley recently visited the top of Mount Washington, on his vacation, he snapped this shot of the tower now being installed by John Shepard of the Yankee network, nearly 7000 feet above sea level and commanding a line-of-sight view into five states. The tower will be used for experiments using the frequency modulation system invented by Major E. H. Armstrong

LAMINATED PLASTICS FOR RADIO, by T. J. McDonough 8
Their place in reducing the size and weight of parts, while improving electrical and mechanical properties

HALF-WAVE RECTIFIER CIRCUITS, by C. M. Wallis 12
Elements of operational calculus applied to the analysis of half-wave rectifiers employing gaseous tubes

ROCHESTER FALL MEETING 15
Program of technical papers to be presented at the forthcoming R.M.A.-I.R.E. meeting

A LABORATORY TELEVISION RECEIVER-IV, by Donald G. Fink 16
Construction and testing of the u-h-f circuits and complete audio channel of *Electronics'* television equipment

LOOP FOR BROADCAST RECEPTION, by Stanford Goldman ... 20
Electrostatic shielding combined with directional properties of loop permits selection of signal from noise, provides adequate pick-up for local programs

A NEW SOUND TRACK FOR MOTION PICTURES, by John K. Hilliard 23
The squeeze or "matted" track reduces background noise in motion picture recording

PORCELAIN COOLING SYSTEM AT WHAM, by John J. Long, Jr. 24
Porcelain pipe supplants rubber hose in the cooling water system of WHAM's power amplifier, eliminates troublesome maintenance problems

PARASITIC OSCILLATION CIRCUITS, by Philip A. Ekstrand ... 26
Discussion of transmitter circuits in which parasitics were discovered, and methods by which they may be corrected

ELECTRIC TIMING DEVICE, by Robert W. Carlson 28
Simple phototube and clock arrangement for broadcasting semi-hourly time signals accurately

BIBLIOGRAPHY ON RADIO INTERFERENCE, by L. F. Roehmann. 32
Sources of information culled from the world's literature, on one of the most serious of radio's problems

PUBLIC RELATIONS IN THE ELECTRONICS INDUSTRY ..... Insert
A suggested program for improving the relations between industry and the public, with special reference to the industries based on the electron tube

DEPARTMENTS

CROSSTALK 7
NEW BOOKS 30
REFERENCE SHEET 32
TUBES AT WORK 34
ELECTRON ART 58
THE INDUSTRY IN REVIEW 70
PATENTS 80
INDEX TO ADVERTISERS 84

PRECISION MANUFACTURED

PERFORMANCE SATISFACTORY

Wherever and whenever used, Cinch plugs and shells prove the quality of their workmanship . . . and efficiency of design; Speaker and antenna connectors . . . miscellaneous cables . . . for auto and phonograph combination radios—ideal for battery operated sets.

Note compactness of parts illustrated. All prong arrangements properly polarized and shells when necessary can be supplied with insulators.

Hundreds of styles and combinations, all sizes for wide and varied uses. There is a Cinch socket available for practically every need. Prompt delivery is a Cinch policy.

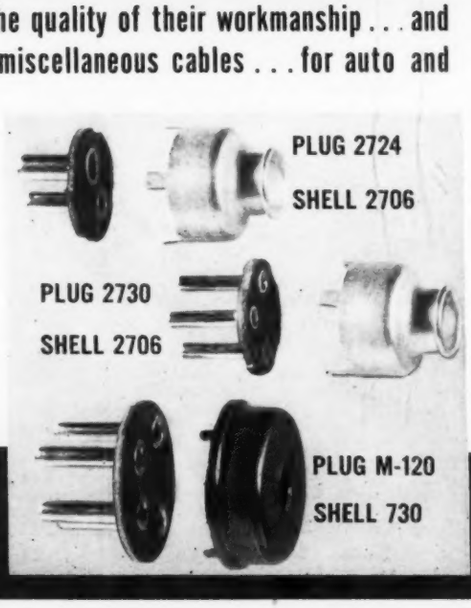

Cinch and Oak Radio Sockets are licensed under H. H. Eby socket patents.

CINCH MANUFACTURING CORPORATION
2335 West Van Buren Street, Chicago, Ill.
Subsidiary: United-Carr Fastener Corporation, Cambridge, Mass.

ELECTRONICS

OCTOBER
1938

KEITH HENNEY
Editor

Crosstalk

▶ **VOLTS** . . . The sad accidental death of Ross Hull, editor of *QST*, as a result of coming into contact with 6000 volts from an experimental television receiver focusses attention upon the extreme necessity for adequate protection when working with high voltage equipment. In the experimental receiver built by *Electronics* considerable effort has been made to see that accidents cannot happen, and those who may build such equipment, perhaps designed after the articles written by Mr. Fink, must not slight the safety measures advocated.

▶ **NEW THINGS** . . . On September 14 New Yorkers got their first opportunity to comment on television and to be televised at the same time. On that day NBC took portable equipment to the street and interviewed passersby, their words and "looks" being sent to the television transmitter on the Empire State and broadcast from there. In a preview theater in New York, a new system of color movies was demonstrated on September 4. Using ordinary black and white film, processed in any laboratory, quickly, with what appeared to be excellent color fidelity, this new system is optical and not photographic or chemical in any way. It looks too simple to be true—but it works.

Using ordinary mercury vapor rectifiers, with few additional trappings, Professor Dorsey of the University of Manitoba demonstrates the rectification of a half-ampere at 70,000 volts in the high tension laboratories of the Consolidated Edison Company, New York City. In a 6-phase setup, this would amount to about 200 kw which is beginning to look like power. The utilities interest is in d-c transmission to avoid putting in new lines etc.

Eastman Kodak company undertakes research to extract vitamin E from wheat; not only develops a method of performing the task at hand, but develops a new type of vacuum pump as a by-product. It is probable that the pump will assume more importance than the vitamin product.

All of these recent events have significance to readers of *Electronics*. There is no end of new things in sight; may it ever be so!

▶ **INSERT** . . . As part of a McGraw-Hill program to promote more cordial relations between industry and the public, and industry's employees, stockholders and consumers, this issue contains a plea for better relations, a plan for achieving such good will, and facts about one of the many questions which bother us today.

The question debated is, should research be stopped?

None of our readers believe it should. We know that the fruits of research are new products, new materials, new economies, new industries, new living standards, new jobs. But the uninformed are often led astray by those who have little to say but talk much, and glibly. The final 8 pages of this insert contains the story of how an industry grew from research by men such as Richardson, Maxwell, Langmuir; by discoveries and inventions by Marconi, DeForest, Armstrong and others; a few words about the different kinds of people that are required to make an industry; and finally something on the benefits of research. Whole volumes could be written on any one of these subjects. But if these pages, written in words of one syllable, will aid anyone in explaining why we must not have less, but more research, to someone who doubts it, the purpose of the message will have been served.

▶ **CONSULTANTS** . . . For some time the editors have been collecting names of experts in various lines of electronic activity the world over. These experts are independent, and are available to be considered when special problems arise in which an outside engineer, physicist or mathematician is required. Inquiries are welcomed.

Electronics is always delighted to uncover a problem, which some one has, and which can be thrown open to the entire readership. There are no strings attached to any suggested solution secured; it is hoped, however, if a problem of general interest appears and is solved that its solution may be presented through these pages.

▶ **SORRY** . . . In Mr. R. W. Carlson's article in August, two errors occurred in the circuit diagram. To make the circuit work, connect the 50,000 ohm screen resistors to the bottom of the plate resistors, and reverse the 180-volt battery.

In April 1937, Professor Russell of Columbia wrote an article on feedback amplifiers. In the diagram on page 17 of that issue appears the circuit of an inverter stage. Anybody building this circuit, as several have, and finding that the 6L6 tubes blow up, had better ground the point between the 150M and 500M resistors feeding the two type 76 tubes.

Errors like these are regrettable; and without actually building the editors have nothing but their knowledge of circuits to call upon to check diagrams submitted by authors. Sometimes the editors add a few errors of their own, by neglecting to catch things the draftsman omitted or inserted. It's a help, however, to get from the authors diagrams which are free from errors and which a non-technical draftsman can follow easily.

PLASTICS FOR RADIO

Laminated plastics have had considerable growth in the radio industry because of light weight, easy machining, high resistivity, and freedom from moisture absorption. Some of the more important properties of laminated plastics, and their use in electronic circuit applications are given in this article by Mr. McDonough

IN THE past few years laminated plastics have played an important part in the radio field in reducing the size and weight of parts. In addition, low water absorption of the material enables it to retain its good electrical properties even after exposure to high humidities. Because of its lightness and strength it often serves as a combined structural and insulating member. Its density is about one-half that of aluminum. For example, Micarta weighs approximately 1.35 grams per cubic centimeter.

The physical properties are such that intricate punchings can be made which still possess the strength and durability necessary for radio service. The tools for punching are the same as those used in the punching of metal materials except the clearances should be smaller between punch and die. Laminated plate can be readily machined, drilled, tapped, threaded and milled with the same tools as soft metals such as brass and bronze. No special tools are necessary for any of these operations.

The electrical properties of the laminated material are such that there is an ample factor of safety for the general run of low frequencies. In the development of the radio field with its higher frequencies and in the electrical field with its step-up in voltage, insulation requirements became much more

Punchability. Laminated plastics offer good mechanical and electrical properties and may be accurately and easily punched. Opposite page—Some of the many coil forms which laminated plastics have made possible

LAMINATED PL

By T. J. McDONOUGH
Westinghouse Elec. & Mfg. Co.

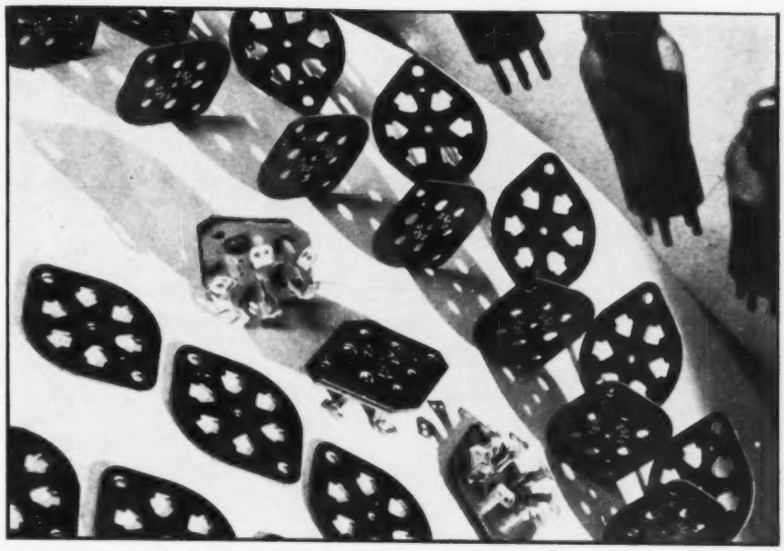

Modern wafer-type tube sockets can be easily punched out of Micarta

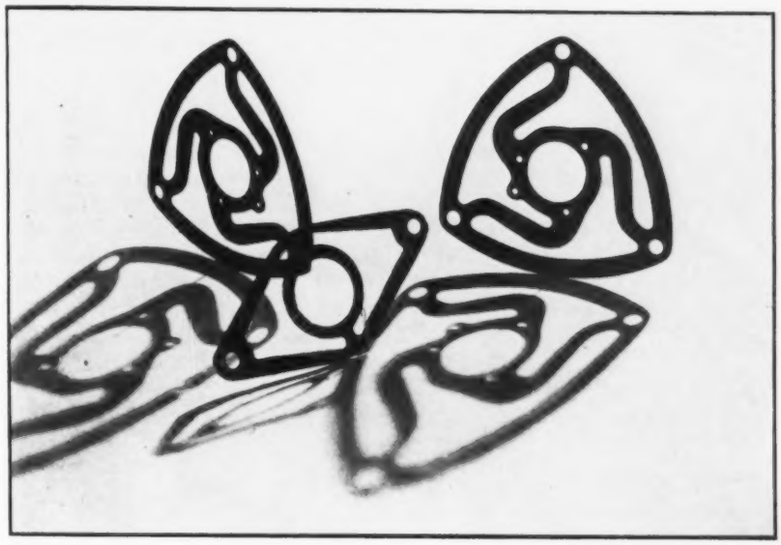

Left—Spiders for loud speakers are often made of laminated plastic materials

Below—Intricate designs with sharp corners, such as these switch parts, are usually made of laminated plastics

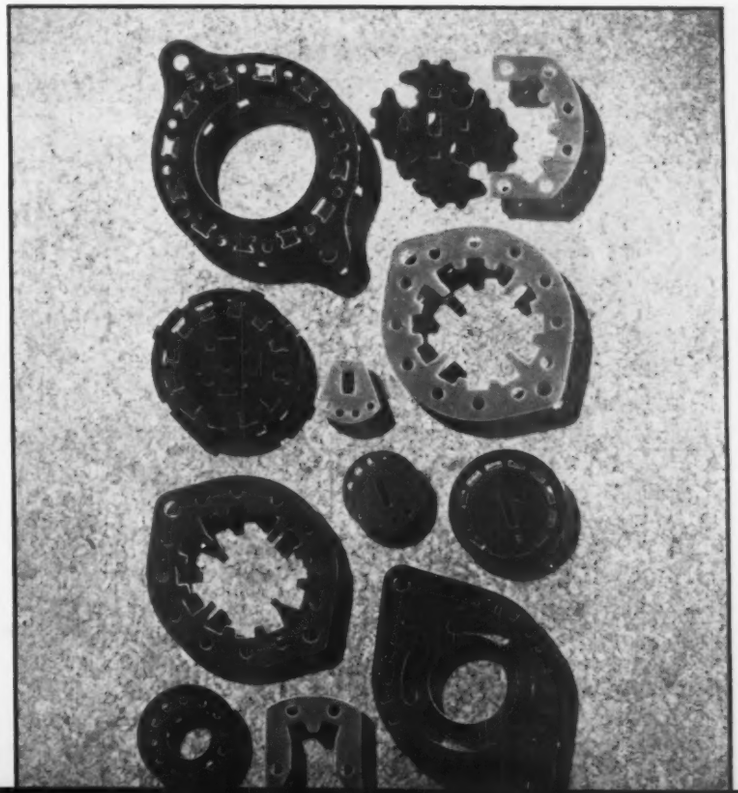

sheets are molded in sizes up to 48" x 96" and in thickness of .010" to 10". In production of plate the treated material is cut into sheets of the desired dimensions of the finished plate. These layers of impregnated sheets are then placed in a hydraulic press where they are subjected to a temperature of 347°F. and a pressure of more than 1000 lbs. per square inch.

Tubes are made by rolling the paper or cloth on a mandrel which is so assembled that the paper or cloth passes over a heated roll which softens the resin and allows it to adhere to the adjacent layer of paper. When the desired thickness of tube is rolled the mandrel and tube are placed in an oven and allowed to cure. After the pressing and curing operations, the plate and tubes are permanently infusible and insoluble.

terial and has the strength to withstand the continual vibration.

Laminated resinous material is formed by the action of heat and tremendous pressure on a number of layers of either paper or cloth which have been impregnated with a synthetic resin. By dissolving this synthetic resin in a suitable solvent a varnish is produced with which the paper or fabric is impregnated. This base material passes continuously through a treating machine where the varnish is applied and the solvent evaporated.

Laminated plastic is available in sheets, rods, tubes, angles, channels and molded shapes. For example,

rigid and laminated materials are finding increasing use.

Tubes made of the material possess all the properties of the plate with the added feature that they can be easily threaded with a very fine thread. On a $\frac{1}{32}$" wall tube it is possible to cut 32 threads per inch. Also, tubes will withstand the heat of the soldering process without blistering or other harmful results.

Other materials such as hard rubber, glass, porcelain, etc. have been tried but none seem to have all the desirable properties of: good electrical characteristics under high humidities; strength, durability with lightness; machinability; resistance to heat; and punchability.

Particularly in radio transmitting apparatus, laminated plastic materials have simplified design problems by their ability to withstand the dielectric field stresses of the radio frequency voltages. Such applications require a material which has high insulation resistance, and which must be mechanically stable; that is, it must not cold flow under pressure.

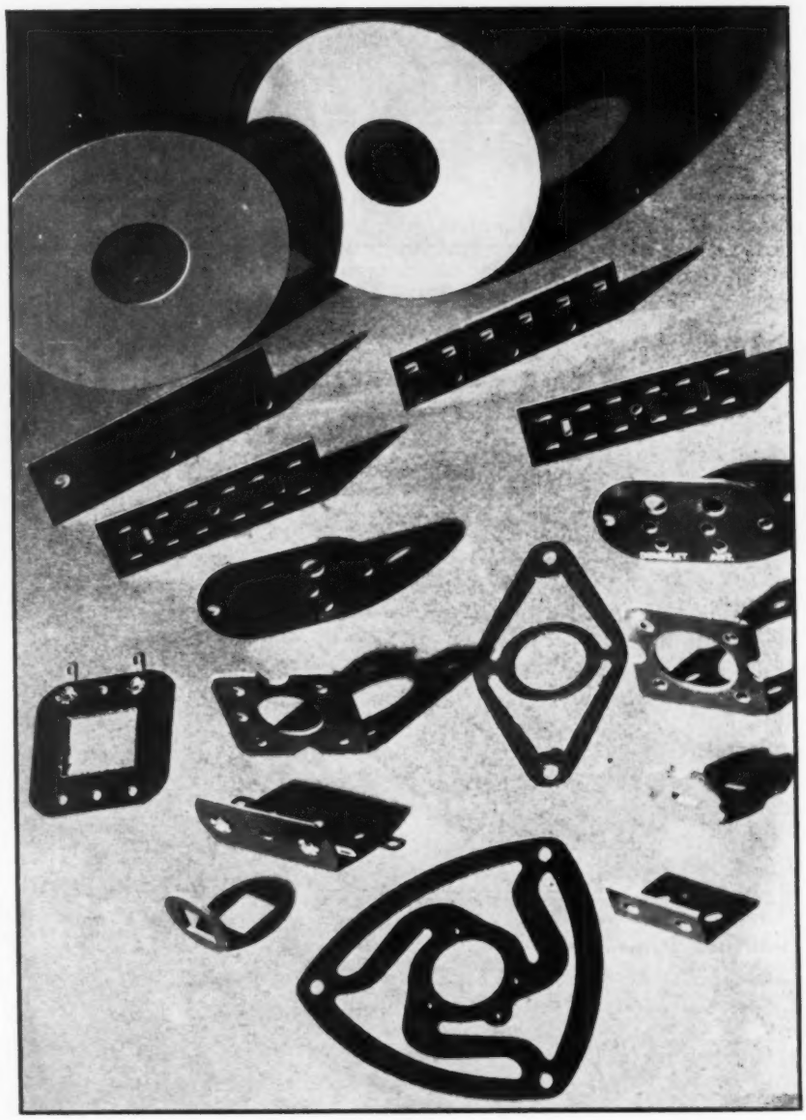

Typical, small radio parts punched from laminated plastics are shown at the right

Below—Radio coil supports made of laminated plastics are durable and low in cost

Coil forms of various sizes for short and long wave sets are shown. In the manufacture of coils it is necessary that a material be easily threaded with a fine thread and that punched holes and slots do not affect the electrical properties of the tube. Other examples of radio parts are shown. These parts include terminals, strips, insulators, speaker terminal blocks. All these parts have been punched cold, and do not show any cracking or bursting of the holes. They are also tapped and riveted. Another part used with great success is the speaker spider. It is very thin ma-

Half-Wave Gas Rectifier Circuits

Current and voltage wave forms for half-wave rectifier circuits having various types of plate loading and employing gaseous conduction tubes. Method of operation calculus provides rigorous analysis

By C. M. WALLIS

Assistant Professor
Department of Electrical Engineering
University of Missouri

FREQUENTLY it is desirable to predetermine the current and voltage wave forms which may occur in a circuit using the low pressure gas filled rectifier tube. The following analytical discussion presents a method, employing operational calculus in its simpler form, for determining in an exact manner these functions in circuits utilizing such an ionic device. The analysis is rigorous in so far as the circuit problem is concerned, though certain basic assumptions have been made.

One distinguishing feature of the low pressure gas filled tube is that tube voltage drop during its conducting period is small and practically independent of current magnitude. This constancy of tube drop is assumed in the following analysis. It is considered also that the circuit is fed from an a-c power source having sinusoidally varying voltage of constant effective value.

First consider the circuit shown in Fig. 1. The voltage impressed is $e = E_m \sin X$. E_a denotes the constant tube drop and v the instantaneous voltage across the load. During the period of current flow, the following equation expresses the voltage relationships in the circuit

$$0 = E_m (\sin X) - v - E_a \qquad (1)$$

Case I. *Pure Resistive Loads*

As the simplest case let it be assumed that the load consists of a resistance in series with a battery on charge. See figure 2. The load voltage is $v = Ri + E_B$. Hence the equation (1) becomes

$$i = \frac{E_m}{R} [(\sin X) - k] \qquad (2)$$

where

$$k = (E_a + E_B)/E_m.$$

The above equation gives the instantaneous value of the circuit current during the period of current flow, i.e., when the bracketed term is positive. The time angle of firing α is $\sin^{-1} k$. The angle of "cut off", β, is $(\pi - \sin^{-1} k)$. Figure 3 illustrates the nature of the current function. It may be seen that the current flows in impulses which are portions of sine waves. The average, or d-c value of the anode current is

$$I_{DC} = E_m [2 \cos \alpha - k (\pi - 2\alpha)]/2\pi R \qquad (3)$$

Case II. *Inductive Load*

Assume now that an inductance of L henrys is placed in the circuit of Fig. 2 as shown in Fig. 4. The load voltage v must now be expressed as

$$v = Ri - L\omega \frac{di}{dx} + E_B$$

which may be written in the form

$$v = L\omega (p + \eta) i + E_B$$

where $\eta = R/L\omega$ and p is the differential operator d/dx. Substituting



Fig. 1, above—Fundamental half-wave rectifier circuit using gaseous rectifier for which analysis is carried out

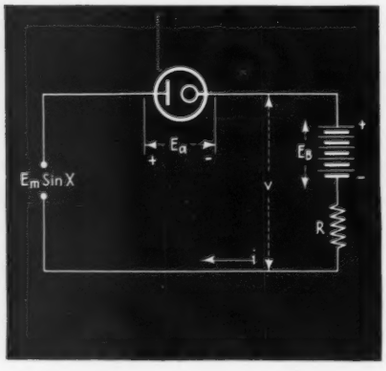

Fig. 2—Half-wave rectifier circuit with resistance plate load

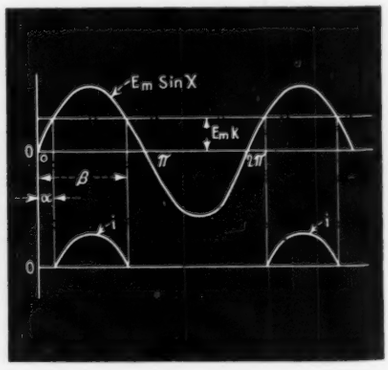

Fig. 3, extreme right—Voltage and current wave forms for half-wave circuit using gaseous conduction rectifier

the above expression for the load voltage into equation (1) and transposing terms yields the result

$$i\,(p+\eta) = \frac{E_m}{L\omega}\,[(\sin X) - k] \qquad (4)$$

which is the differential equation of the circuit current expressed in operational form.

Since equation (4) indicates that the current i is the result of the two voltage functions $\frac{E_m}{L\omega}\sin X$ and $-\frac{E_m}{L\omega}k$ acting in the circuit, its complete solution includes the complementary function plus the particular integral for each voltage function. Hence the general solution may be carried out in the following manner.

Let $i = i_1 + i_2 + i_3$

where $i_1\,(p+\eta) = 0 \qquad (5a)$

$$i_2\,(p+\eta) = \frac{E_m}{L\omega}\sin X \qquad (5b)$$

$$i_3\,(p+\eta) = -\frac{E_m}{L\omega}k \qquad (5c)$$

the complementary function is obtained from (5a) which is the homogeneous equation. Since it is a differential equation of the first order, its solution is of the form

$$i_1 = A\,\epsilon^{-\eta x}$$

The particular integral for each voltage function is obtained from (5b) and (5c). They are the steady state solutions of these equations. Thus the steady state solution of (5b) is obtained by letting $p = j = \sqrt{-1}$, and the steady state of (5c) is found by letting $p = 0$. Carrying through these operations and simplifying, the complete solution of (4) may be written

$$i = \frac{E_m}{L\omega}\left[\frac{\sin(X-\delta)}{\sqrt{1+\eta^2}} - \frac{k}{\eta} + A\,\epsilon^{-\eta x}\right] \qquad (6)$$

where $\delta = \cot^{-1}\eta$.

The constant A is evaluated from the condition at the point of firing, i.e. when $X = \alpha = \sin^{-1} k$, and $i = 0$. Hence

$$A = \epsilon^{+\eta\alpha}\left\{\frac{k+\eta\sqrt{1-k^2}}{\eta\,(1-\eta^2)}\right\} \qquad (7)$$

The voltage across the inductance is $e_l = L\omega\frac{di}{dx}$ or

$$e_L = E_m\left\{\frac{\cos(X-\delta)}{\sqrt{1+\eta^2}} - A\eta\epsilon^{-\eta x}\right\} \qquad (8)$$

It is now possible to determine the exact nature of the current and voltage wave forms by assuming values of X starting at $X = \alpha$. The angle of cut-off β is that value of X which makes the bracketed term of equation (6) equal to zero.

Figure 5 illustrates the voltage and current wave forms obtained in such a circuit. We note that the current rise is delayed due to the inductive property of the circuit. In addition the period of current flow is extended, cut off occurring at a point further along in the cycle than if the circuit were non-inductive.

The following example illustrates the ease with which the above equations may be handled: A 60 cycle voltage of 320 sin ωt is impressed across a circuit containing a gas filled rectifier tube, a 90 volt battery on charge, a resistance of 37 ohms and an inductance of 0.218 henry. The tube drop is 7 volts.

$$k = (E_a + E_B)/E_m = 0.303$$

$$A = \epsilon^{+\eta\alpha}\left[\frac{k+\eta\sqrt{1-k^2}}{\eta\,(1-\eta^2)}\right] = 1.55$$

$$\eta = R/L\omega = 0.45 \qquad \delta = \cot^{-1}\eta = 65.77^\circ$$

$$\alpha = \sin^{-1} k = 17.64^\circ \qquad \frac{E_m}{L\omega} = 3.89$$

Current equation between values of $X = \alpha$ and $X = \beta$ is

$$i = [3.54\sin(X-65.77^\circ) + 6.03\,\epsilon^{-0.45x} - 2.62] \text{ amperes}$$

The quation for the voltage across L is

$$e_L = [291.5\cos(X-65.77^\circ) - 223.5\,\epsilon^{-0.45x}] \text{ volts}$$

Curves computed from the above equation are shown in Fig. 5.

Case III. *Capacitive Load*

The third type of circuit to be considered is the one shown in Fig. 6 where the load is capacitive in character. When in operation the condenser C is charged during the period of tube current flow. During the period that the tube is not conducting, the condenser discharges through the resistance R. The nature of the load voltage v is illustrated in Figure 7.

During the the period of discharge

$$v = V'\,\epsilon^{-\frac{X-\pi}{RC\omega}} \qquad (9)$$

where V' is the value of the load voltage at the instant of rectifier cut off. During the charging period $v = Z(p)\,i$ where $Z(p)$ is the impedance of the load in operational form. Hence dur-

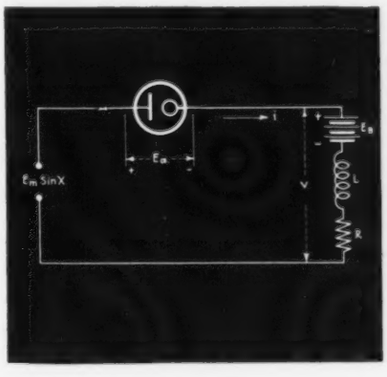

Fig. 4, left—Schematic diagram of half-wave rectifier having inductive and resistive plate loading

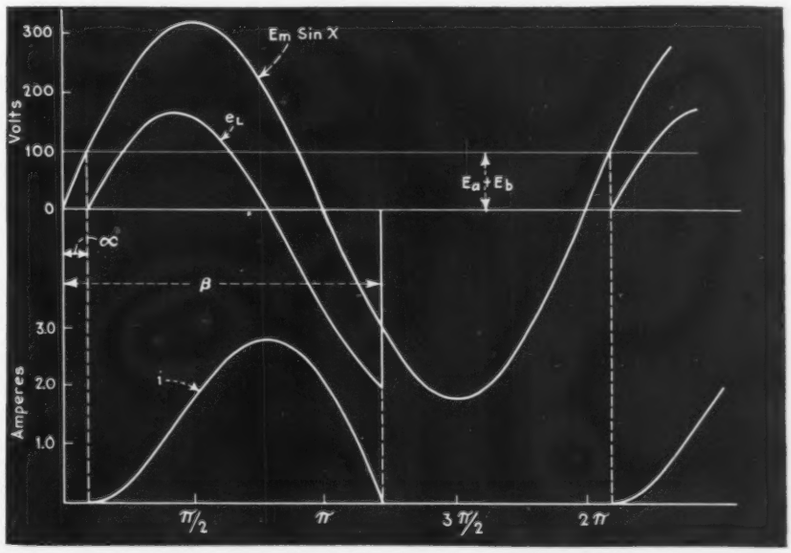

Fig. 5, above—Voltage and current wave forms for rectifier with inductive and resistive load

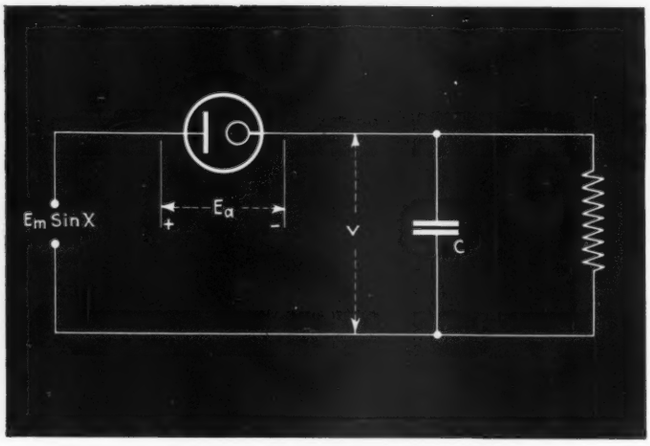

Fig. 6—Gas tube rectifier circuit having resistive and capacitive plate loading

ing this period the rectifier current i may be expressed as

$$i\Big]_{\alpha \text{ to } \beta} = \frac{E_m (\sin X) - E_a}{Z (p)} \qquad (10)$$

The load impedance is

$$Z (p) = \frac{R/C\omega p}{R + 1/C\omega p} = \frac{R}{RC\omega p + 1}$$

which when substituted into equation (10) results in the following:

$$i\Big]_{\alpha \text{ to } \beta} = E_m \left[\frac{\sqrt{1 + R^2C^2\omega^2}}{R}\right] \sin (X + \delta) - \frac{E_a}{R} \qquad (11)$$

where $\delta = \tan^{-1} RC\omega$.

The angle of tube current cut off, β, may be determined from the above equation, since when $X = \beta$, $i = 0$. Consequently

$$\beta = 180° - \delta - \sin^{-1}\left\{\frac{E_a}{E_m \sqrt{1 + R^2C^2\omega^2}}\right\} \qquad (12)$$

The value of V' is then

$$V' = E_m (\sin \beta) - E_a \qquad (13)$$

It should be noted that α cannot be determined from equation (11) since there is a discontinuous rise of current at the point of firing. See Figure 7. However, it may be found from the load voltage condition at the point R where $X = (2\pi + \alpha)$. At this point

$$E_m \sin (2\pi + \alpha) - E_a = V' \epsilon^{-\frac{2\pi + \alpha - \beta}{RC\omega}} \qquad (14)$$

Equation (14) contains the unknown α which cannot be solved directly. The easiest method, is to plot values of the right and left hand members against assumed values of α and determine the correct value from the intersection of the two curves. The angle of firing, α, having been found the current function may be determined by equation (10) between the limits of $X = \alpha$ and $X = \beta$.

Generally it is of major interest to know the d-c value of the load voltage v. This may be found from the following equation

$$V_{DC} = \frac{1}{2\pi}\left\{\int_\alpha^\beta [E_m (\sin X) - E_a]\, dx + \int_\beta^{2\pi+\alpha} V' \epsilon^{-\frac{X-\beta}{kC\omega}}\, dx\right\}$$

or

$$V_{DC} = \frac{1}{2\pi}\left\{E_m [\cos \alpha - \cos \beta] - E_a |\beta - \alpha| + RC\omega V'\left[1 - \epsilon^{-\frac{2\pi+\alpha-\beta}{RC\omega}}\right]\right\} \qquad (14)$$

One characteristic of such circuits is the high peaked current impulse that results and the low average or zero frequency current. Knowledge of the maximum instantaneous current is important, of course, in the selection of the rectifier tube to supply such a circuit.

The following example illustrates how the above equations may be handled: A voltage of 320 sin ωt at 60 cycles is impressed across a half wave rectifier circuit. The load consists of an 8430 ohm resistance in parallel with a 8.2 μf condenser. The tube drop is 7 volts.

$RC\omega = 26.08$ $\qquad \delta = \tan^{-1} RC\omega = 87.8$

$$\beta = 180 - \delta - \sin^{-1}\left\{\frac{E_a}{E_m \sqrt{1 + R^2C^2\omega^2}}\right\} = 92.2°$$

$V' = [E_m (\sin \beta) - E_a] = 313$ volts

The angle α is determined from the equation

$$320 \sin (2\pi + \alpha) - 7 = 313\, \epsilon^{-\frac{2\pi + \alpha - 92.2°}{26.08}}$$

By solution $(2\pi + \alpha) = 414°$; $\alpha = 54°$.

$$V_{DC} = \frac{1}{2\pi}\left\{320 [\cos 54° - \cos 92.2°] - E_a [1.61 - .945] + (26.08)(313)\, 1 - \epsilon^{-0.215}\right\}$$

$V_{DC} = 279$ volts;

$$I_{DC} = \frac{279}{8430} = .033 \text{ amperes}$$

The equation for the rectifier current during the charging period is

$i = .001 \sin (X + 87.8°) - .0083$ amperes

Figure 7 shows the voltage v and the current i as determined for the above equations.

Fig. 7—Current and voltage wave forms for resistance and capacitance loaded rectifier circuit of Fig. 6

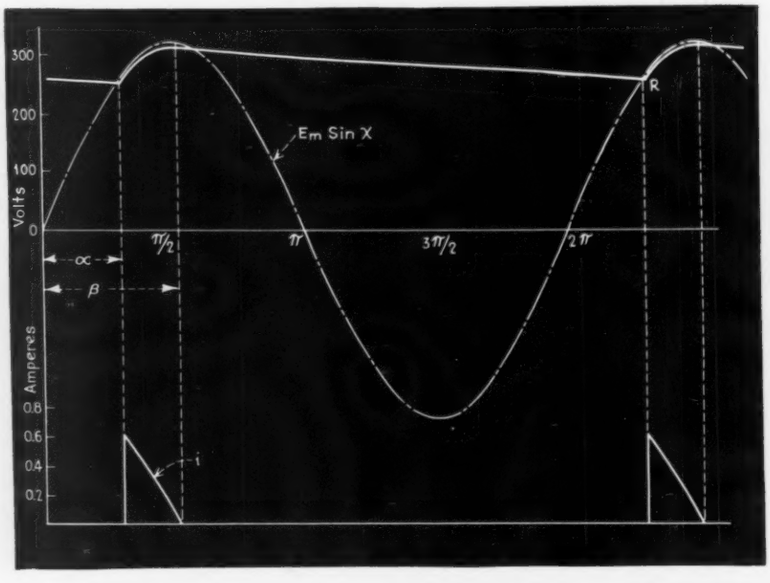

I. R. E.—R. M. A. ROCHESTER MEETING

NOVEMBER 14, 15, 16 . . . SAGAMORE HOTEL . . . ROCHESTER, NEW YORK

MONDAY, NOVEMBER 14.

9:00 A.M.—Registration.
Exhibits Open.

9:30 A.M.—Technical Session.

"Frequency Modulation," by C. B. Fisher, *Northern Electric Co.*

"Television R-F Input Circuits," by H. T. Lyman, *General Electric Co.*

"Loudspeaker Consideration in Feedback Amplifiers," by Hugh S. Knowles, *Jensen Radio Mfg. Co.*

12:30 P.M.—Group Luncheon.

2:00 P.M.—Technical Session.

"The Over-Voltage Timer and an Example of its Application to the Measurement of Radio Interference," by C. M. Burrill and E. T. Dickey, *RCA Mfg. Co.*

"Measurement of Radio Interference," by C. J. Franks, *Ferris Instrument Corporation.*

4:00 P.M.—Inspection of Exhibits.
Committee Meetings.

6:30 P.M.—Group Dinner.

7:45 P.M.—Technical Session.

"Image Amplifier Pick-Up Tubes," by P. T. Farnsworth and B. C. Gardner, *Farnsworth Television, Inc.*

TUESDAY, NOVEMBER 15.

9:00 A.M.—Registration.
Exhibits Open.

9:30 A.M.—Technical Session.

"Standardized Intermediate Frequency," by J. E. Brown, *Zenith Radio Corporation.*

"Recent Developments in Tube Design," by R. M. Wise, *Hygrade Sylvania Corporation.*

12:30 P.M.—Group Luncheon.

2:00 P.M.—Technical Session.

"Cathode Neutralization in I-F Amplifiers," by J. A. Worcester and C. S. Root, *General Electric Company.*

"Gamma and Range in Television," by I. G. Maloff, *RCA Mfg. Co.*

4:00 P.M.—Inspection of Exhibits.
Committee Meetings.

6:30 P.M.—Tenth Anniversary Dinner (Stag).

WEDNESDAY, NOVEMBER 16.

9:00 A.M.—Exhibits Open.

9:30 A.M.—Technical Session.

"The Interpretation of Amplitude and Phase Distortion in Terms of Paired Echoes," by Harold A. Wheeler, *Hazeltine Service Corporation.*

"New-High-Transconductance Ultra-High Frequency Tubes," by A. P. Kauzmann, *RCA Mfg. Co.*

"The Use of Die Castings in Radio Applications," by W. W. Broughton, *The New Jersey Zinc Company.*

12:30 P.M.—Group Luncheon.

2:00 P.M.—Technical Session.

"Principles and Methods in Television Laboratory Technique," by S. W. Seeley and D. E. Foster, *RCA License Laboratory.*

"Production of Image Dissector Tubes for Motion Picture Pick-Up," by C. Larson and B. C. Gardner, *Farnsworth Television, Inc.*

4:00 P.M.—Exhibits Close.

ELECTRONICS RECEIVES FIRST OUTDOOR TELEVISION BROADCAST

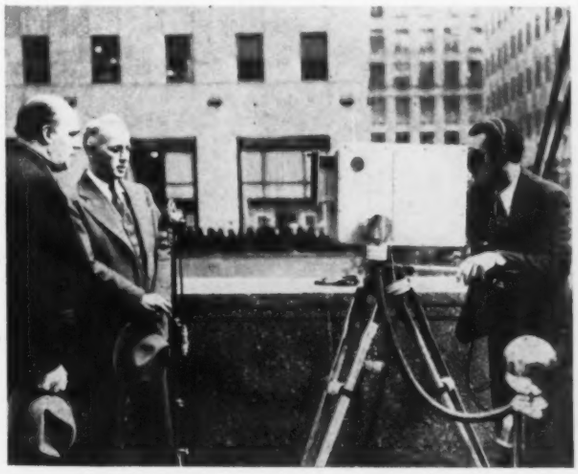

On September 14 in front of the RCA Building at 30 Rockefeller Plaza, Warren Wade, NBC program director interviewed William O'Donnell on the future usefulness of television, in the first regularly scheduled outdoor telecast by the National Broadcasting Company

Portable equipment was used to relay, via coaxial cable, the audio and video signals to the transmitter atop the Empire State Building. The television receiver built by *Electronics'* editorial staff (see page 16) picked up the image shown in the unretouched photograph above

A Laboratory Television Receiver—IV

In this fourth installment describing *Electronics'* equipment the u-h-f, converter, and audio portions of the superheterodyne receiver are described, completing the sound channel from antenna to loudspeaker and the picture channel from antenna to i-f amplifiers.

By DONALD G. FINK
Managing Editor, Electronics

THE preceding installments in this series have described the cathode-ray tube equipment, including the scanning generators and the sync separators which control the scanning generators. It now remains to describe the radio-, intermediate-, video-, and audio-frequency circuits which supply the control signals to the cathode-ray tube and loudspeaker.

The superheterodyne type of circuit was decided upon because it is representative of current professional practice and because it is capable of greater stability than a tuned r-f circuit of equivalent gain. The superheterodyne entails tracking problems and the design of wide-band i-f transformers for the video channel, but these are no worse than the tendency of tuned r-f stages to oscillate and the complications of gang tuning for the large number of stages required.

The basic design requirements of the receiver may be simply stated: the tuning range should cover as many of the available television channels as are feasible. In the present case the three channels lowest in frequency, 44 to 50 Mc., 50 to 56 Mc., and 66 to 72 Mc., are covered. According to the recently proposed R. M. A. standards, each of these 6-Mc. channels contains a video carrier 2.5 Mc. above its lower limit (at 46.5 Mc. in the 44-50 Mc. channel) and an audio carrier 0.25 Mc. below its upper limit (at 49.75 Mc. in the 44-50 Mc. channel). The separation between the video and audio carriers is accordingly 3.25 Mc. and this separation is the same for all channels. The side bands contemplated in the video channel are 2.5 Mc. each side of the carrier for double-sideband transmission. In the event that single-sideband transmission proves practical and is adopted, the carrier separation will become 4.5 Mc. and the single video sideband will be nearly 4 Mc. side. The design of the present receiver is based on double-sideband transmissions and a 2.5 Mc. sideband, but it can be readjusted for single-sideband transmission without any constructional changes, with the acceptance of the video channel limited to a width of 2.5 Mc., when the occasion requires it.

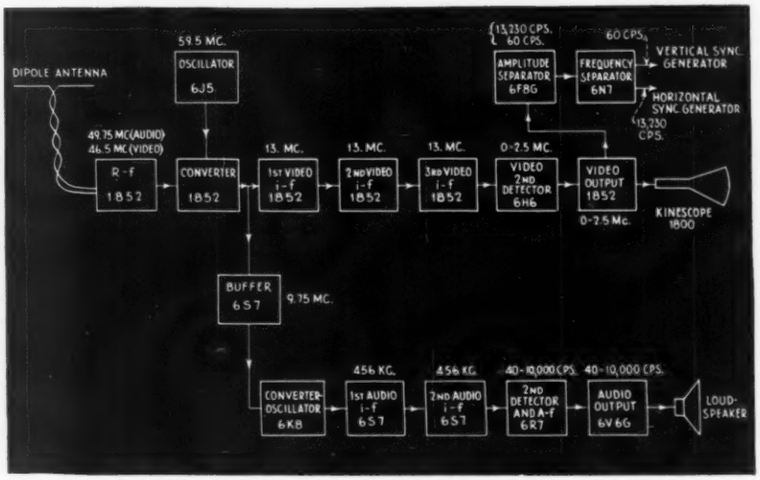

Fig. 1—Block diagram of the video-audio receiver unit, showing functions of all tubes mounted on the chassis in Fig. 2. The numbers refer to the frequencies handled by each tube when the r-f stage is tuned to the 44-50 Mc. channel

The fact that the audio and video carriers have a fixed frequency separation of 3.25 Mc. permits the use of a single r-f stage and converter which accepts both carriers at once and converts them to two intermediate frequencies separated by the same interval. In the present case the local oscillation frequency in the converter is adjusted to be 13 Mc. higher than the video carrier. Consequently in the 44-50 Mc. channel, for example, the oscillator frequency is 46.5 plus 13, or 59.5 Mc. The 59.5 Mc. oscillator frequency is mixed with the 49.75 Mc. audio carrier to produce a 9.75 Mc. audio i.f. and with the 46.5 Mc. video carrier to produce a video i.f. of 13 Mc.

The audio i.f. may then be amplified in stages employing 9.75 Mc. coupling transformers, which are not currently manufactured and must be specially constructed. A simpler solution of this problem is to employ an ordinary short-wave broadcast receiver tuned to 9.75 Mc. The present design has been arranged with this possibility in mind, but for the sake of completeness, the 9.75 Mc. audio receiver has been built directly into the equipment. This receiver employs standard components throughout, including a second converter stage which converts the 9.75 Mc. audio i.f. to 456 kc.

The video i.f. at 13 Mc., has two sidebands each 2.5 Mc. wide extending above and below it. Economy dictates that only one of these sidebands, that between 10.5 and 13 Mc., be amplified. Satisfactory i-f transformers

for this band-width have not been put on the market at the present time, and consequently must be constructed by hand. The design of the video i-f amplifier as well as the video detector and output stages will be given in the next installment of this series.

The remaining design consideration is the question of over all sensitivity. Sensitivity greater than 1 millivolt (for full output) is apt to be wasted, so far as the video channel is concerned, unless the noise conditions are favorable. Greater sensitivity than this is achieved at the expense of one or two additional i-f amplifier stages, which inevitably limit the accepted band-width and consequently lower the picture quality. In the audio channel, however, the band-width is so narrow that any sensitivity up to the limits of tube noise can be used without compromise. The present design gives full output on the video channel with a 1 millivolt signal and on the audio channel with a 50 microvolt signal. The audio channel is provided with a.v.c. so that the additional gain, relative to the picture signal, is automatically removed if not needed.

The tube line-up of both video and audio channels is given in Fig. 1, and the actual positions of the components on the chassis in the photograph in Fig. 2. As shown in these illustrations, the signal from the antenna enters first an r-f stage employing a type 1852 tube. This tube is of the high-g_m variety and employs the single-ended construction (control grid and plate leads are both taken through the base). It is capable of a gain of about 4 or 5 per stage, at 50 Mc. with heavily loaded tuned circuits. The r-f stage feeds another 1852 employed as a converter, where the signal is mixed with oscillations from a separate oscillator employing a 6J5 triode. In the output of the converter stage, the video and audio intermediate frequencies appear. The video i.f. is then amplified in three stages of amplification employing 1852 tubes and specially constructed i-f coupling networks. The output of the video i-f amplifier is detected in a 6H6 diode, and fed to another 1852 employed as a video output stage.

The audio channel begins at the output of the 1852 converter, as a 9.75 Mc. audio i.f. This i.f. is fed first to a 6S7 buffer stage, in which a rejector circuit rejects the video i.f. while accepting the audio i.f. The output of the 6S7 buffer is then fed directly to the input of an audio receiver tuned to 9.75 Mc. The receiver, built into the equipment in this case, contains a 6K8 converter stage, which produces a 456 kc. i.f., two 6S7 i-f amplifiers, a 6R7 double diode triode for detection, a.v.c., and first audio, and a 6V6G audio output tube.

The arrangement of the parts and the assembly of the chassis in the rack are shown in Figs. 2 and 3. The receiver chassis is mounted directly below the chassis which supports the cathode-ray tube and scanning circuits, and the separation between the plate of the video output tube and the control grid terminal of the cathode ray tube is some 19 inches. To conduct the signal from the output tube to the cathode-ray tube, a small coaxial line is employed, as shown in the photograph. The details of this arrangement will be given in the next installment.

Layout of the receiver chassis

Figure 4 gives the complete connection diagram of all parts of the receiver, except the video i-f, video detector and video output stage. We consider first the 1852 r-f stage, the 6J5 oscillator and the 1852 converter. It will be noticed that switch-tuning is employed for the three channels, and that no attempt is made to obtain continuous single-control tuning over the range. The reason for this choice rests partly in the difficulty of obtaining proper tracking in u-h-f circuits, and partly in the fact that three channels can be conveniently covered by switch tuning. Four tuned circuits are employed, two between the antenna and the r-f tube grid, one in the r-f tube plate circuit, and one in the oscillator. Each circuit is tuned by a group of three midget air-dielectric condensers, which are switched into the circuit by two rotary switches, each a double pole, triple-throw unit. The switches are mounted directly on the front panel of the receiver unit, with the 12 midget condensers grouped around them to permit the shortest possible leads. The 1852 and 6J5 tubes are mounted horizontally with the socket terminals extending directly to the tuned circuits. The 1852 is so mounted that the heater pins are in a vertical plane. All by-pass condensers are

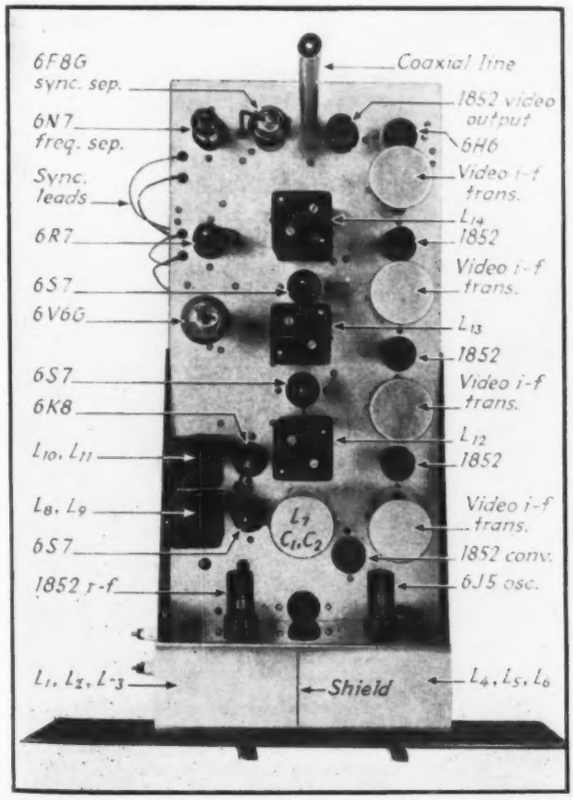

Fig. 2—Top view of the superheterodyne receiver chassis, containing 16 tubes for all video, audio and sync-separation functions. The labels correspond to those in Fig. 4

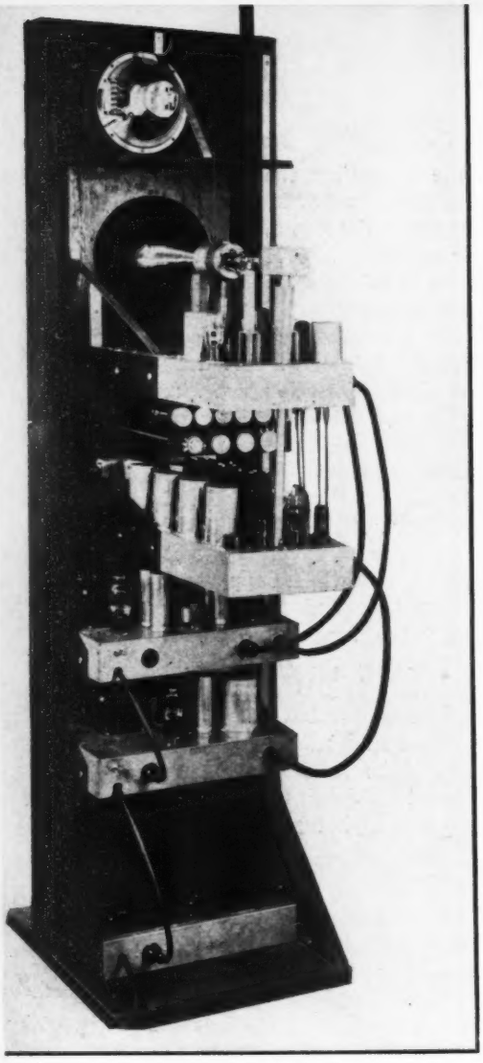

Fig. 3—Rear view of the rack assembly, showing relation of receiver-unit chassis to cathode-ray tube mount, scanning generators, and power supplies

mounted directly on the socket terminals and grounded at the nearest point in the chassis.

The coil L_1 (Fig. 4) is two turns grounded at the center, L_2 and L_3 are 5 turns of #26 enamelled wire, wound on separate ½-inch diameter hard-rubber cylinders, the coils occupying a length of ¼ inch. The coils are shunted by 2000- and 3000-ohm ½-watt resistors, respectively, to widen the frequency band accepted. Coil L_4 in the 1852 plate circuit is 5 turns of #26 enamelled wire on ½-inch form, with ¼ inch length. It is shunted, indirectly, by the 1000-ohm grid resistor in the 1852 converter stage. The coil L_5 is 4 turns of #16 enamelled wire, wound on a ½-inch form, with the cathode tap taken 1 turn from the ground end. The r-f choke L_6 is a conventional pie-wound unit.

The construction of these circuits is straightforward, provided that the parts are properly arranged to allow short leads in and near the tuned circuits. The by-passing is very important to avoid feed-back troubles. Note that each tube heater is individually by-passed at the socket and that one side of the heater circuit is grounded (the other heater terminals are marked "H"). The bias gain control R_{18} on the 1852 r-f stage provides voltage which is also used on the three video i-f stages, to be described later. The plate load resistor in the output of the 1852 converter is temporary, for testing the audio channel only. When the i-f amplifiers are wired, the first i-f coupling network serves as a plate load for the converter, as noted in the next installment.

The audio channel circuits

It has been said that no one should attempt the construction of a television receiver unless he is fully capable of assembling and wiring an all-wave superheterodyne receiver. If there is any doubt in the reader's mind concerning his ability to build such a receiver, the six tubes in the lower half of Fig. 4 constitute a fair test. With the single exception of the rejector circuit in the grid circuit of the 6S7 buffer stage, all the components in the audio channel are conventional in every respect. The 6S7 tubes are chosen because they have half the heater drain of the more usual 6K7's (the total heater consumption of all the tubes in the receiver unit, including the sync separators, is 6.2 amperes). The 6K8 converter is used in preference to other pentagrid units, since it gives very stable performance at 9.75 Mc.

The inductors L_8 and L_9 are those of a standard shortwave-broadcast r-f coupling unit, with the broadcast band set of coils unused. The coils L_{10} and L_{11} are a similar sw-bc oscillator unit, intended to give an i.f. of 456 kc. from a 5-15 Mc. signal. L_9 and L_{10} are tuned by 43-plate midget condensers which are mounted under the chassis, since they do not need adjustment after the initial setting. L_{12}, L_{13}, and L_{14} are, respectively, standard input, interstage and output i-f transformers, for 456 kc. The converter and two i-f stages are a-v-c controlled from one of the diode units in the 6R7 duo-diode triode. The other diode provides a-f voltage for the triode through the coupling network and the audio gain control R_{19}. The output tube, a beam-power tube, is capable of about 5 watts output with low distortion. A simple tone control R_{20} is incorporated in the output of this tube. Though not quite so necessary in these circuits as in the u-h-f portions of the receiver, the practice of individual by-passing of heaters and all other non-signal elements is recommended.

The rejector circuit (L_7,C_1,C_2) is mounted in a separate shield can. The coil L_7 consists of 35 turns of #26 enamelled wire close wound on a ½-inch diameter rubber cylinder. The capacitors are air-dielectric midget units. The circuit is a combination of a series and parallel tuned circuit. L_7 and C_1 are made anti-resonant at 11.75 Mc. to reject the video i-f sideband, while L_7 and C_2 are made resonant at 9.75 Mc. to accept the audio i.f. The voltage appearing across C_2, containing the audio i.f. only, is then fed to the 6S7 buffer stage. The tuned circuits also have a purpose in flattening the overall response on the video i-f amplifiers, as explained in the next article.

The appearance of the front panel of the receiver unit is shown in Fig. 5. The two rotary switches are surrounded by the tuning adjustments for each of 12 midget condensers. The switching is arranged so that when both the switches are to left of center the 44-50 Mc. channel is received, when both are on center the 50-56 Mc. channel, and when to right of center the 66-72 Mc. channel. Great care should be exercised to obtain short leads in the latter position. Below the tuning switches are five controls, left to right, the audio tone control R_{20}, the audio gain control R_{19}, the video gain control R_{18}, the horizontal sync amplitude control R_{17}, and the vertical

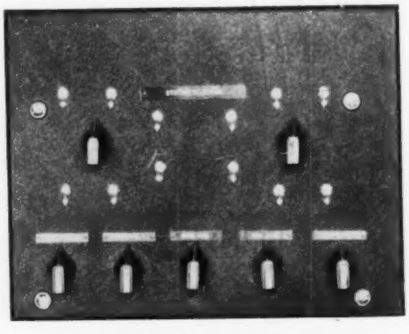

Fig. 5—Controls of the receiver unit. The tuning switches, surrounded by the midget condenser adjustments, are above; gain, tone and sync controls at bottom

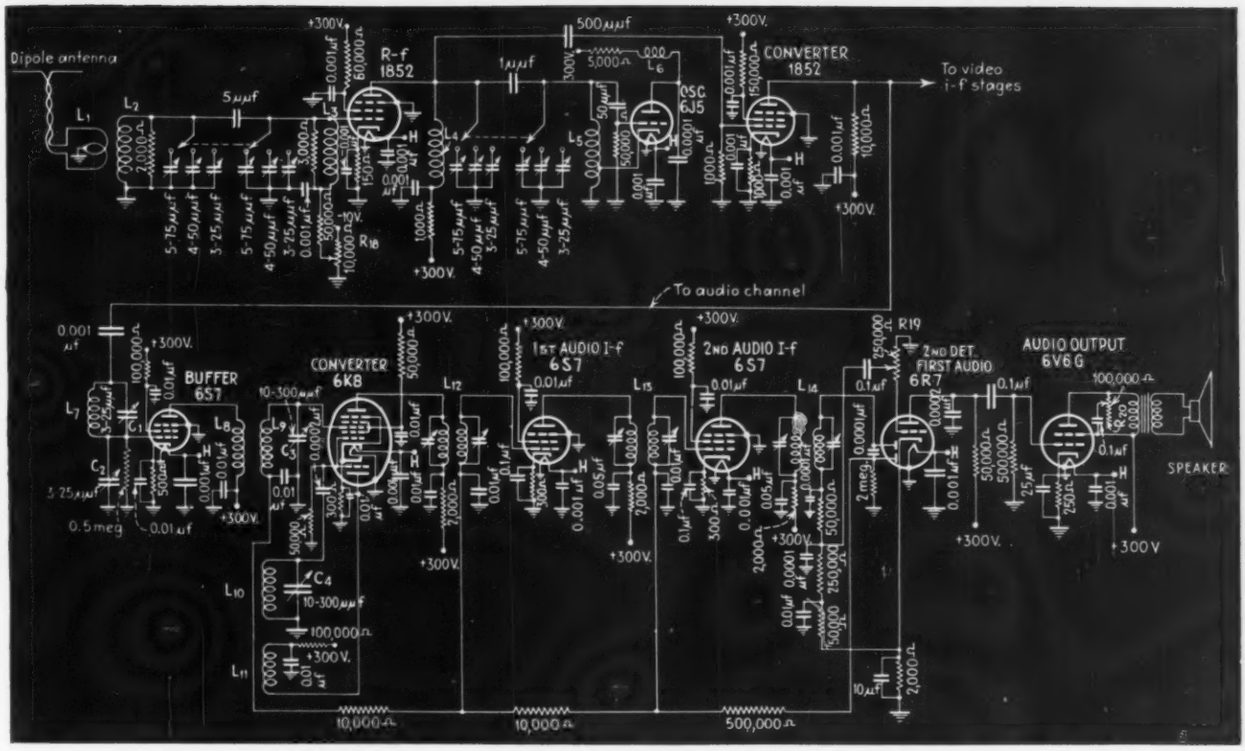

Fig. 4—Connection diagram of the complete audio channel from antenna to loudspeaker. The r-f and converter tubes serve also to produce the i.f. for the video channel, to be described in next installment

sync amplitude control R_{16} (the last two are shown in Fig. 7, part III, page 24, September issue). These five knobs are connected by fiber extension shafts to the potentiometers, which are mounted near the circuits to which they are connected.

Testing the audio and u-h-f channels

In the opinion of this writer it is literally impossible to bring the circuits shown in Fig. 4 into alignment without a signal generator. In the generator used in our work, a General Radio model 605-B, all frequencies from 10 kc. to 50 Mc. are available at outputs from 1 microvolt to 1 volt. This is an elaborate piece of test equipment, and while equipment of this type is possessed by most engineering laboratories, it may not be available to many of *Electronics*' readers. A service-type generator may be used, provided that an auxiliary source of u-h-f voltage is available.

The procedure used is essentially that employed in lining up any superheterodyne. An audio source (beat oscillator) is first connected to the control grid of the 6R7 to be sure that the a-f circuits are in working order and that the desired frequency response and freedom from distortion are obtained. A signal of about 100 millivolts at 456 kc. modulated at 400 cps. is then applied to the grid of the second 6S7 i-f stage and the transformer L_{14} lined up (using an oscilloscope for indication). The same frequency at about 1 millivolt is then applied to the grid of the first 6S7 i-f stage, and L_{13} lined up. Then L_{12} is lined up with the same signal applied to the grid cap of the 6K8 converter. The action of the a-v-c circuits can then be tested by varying the input voltage from 100 microvolts to 100 millivolts. Next a signal of about 10 millivolts, at 9.75 Mc., is applied to the grid cap of the 6S7 buffer stage, and the capacitors C_3 and C_4 connected to coils L_9 and L_{10} adjusted until the maximum signal (reducing the input voltage as required) is obtained. Of the two possible settings of the oscillator, the lower frequency position should be selected to remove the oscillator frequency as far as possible from the pass-band of the video i-f amplifiers. The generator should then be connected to the 1852 converter grid and the capacitor C_2 adjusted for maximum signal. The generator should then be set at about 11.75 Mc. and capacitor C_1 adjusted for *minimum* signal, to reject the video i-f sideband. If at any point in this testing procedure unwanted oscillation appears, it must be tracked down and eliminated before proceeding further.

The u-h-f portions are lined up as follows: the signal generator is adjusted to 49.75 Mc. at high output, applied to the grid of the r-f stage and the 6J5 oscillator capacitor for the 44-50 Mc. channel is adjusted until the signal appears. The plate circuit is then tuned for maximum signal. The generator, finally, is connected to the antenna input, and the two antenna tuned circuits are adjusted to maximum gain. The other two channels are lined up in the same manner, using input signals of 55.75 Mc. and 71.75 Mc.

The 6J5 oscillator should possess a high degree of stability, if the audio i-f band is to remain centered on the pass-band of the 456 kc. i-f amplifiers. The modified Hartley circuit employed has good stability but if drift does appear, it is possible to broaden the pass-band of the 456 kc. stages by shunting the primary and secondary of each i-f transformer with a 10,000-ohm resistor.

The fifth installment of this series will describe the design and construction of the video i-f transformers, and the connections and testing of the complete video channel from antenna to cathode-ray tube.

A Shielded Loop For Noise

By STANFORD GOLDMAN

General Electric Co., Bridgeport, Conn.

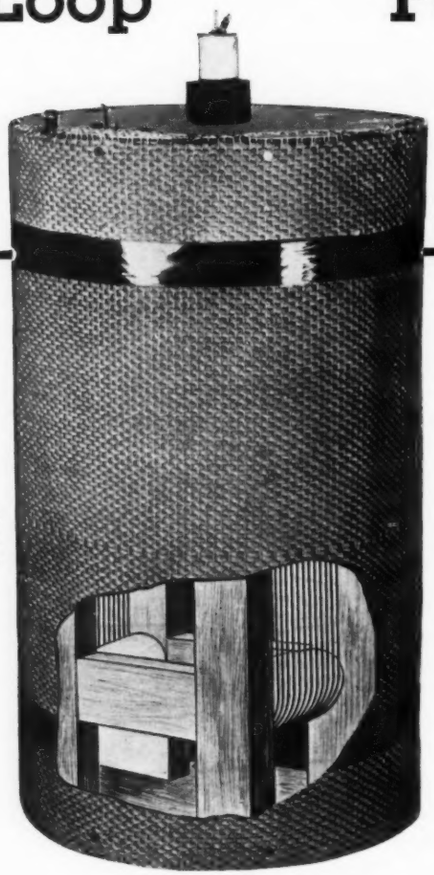

Completed loop as installed in broadcast receiver.

GREATER importance is continually being assumed by the problem of interference to radio broadcast reception, due to the increased number of radio sets, their increased sensitivity, and increase in other uses of electricity. Today the most serious technical problem in radio, so far as the user in large cities is concerned, is the elimination of noise.

To reduce such trouble, in the past few years, relatively complicated doublet antennas have been used. (The operation of these antennas is described by R. B. Dome, *G-E Review*, Dec. 1937.) These have been quite a help in many cases, but their most serious drawback is the difficulty of a practical installation. To overcome this drawback and at the same time to reduce noise interference still more, the use of a shielded loop in broadcast receivers was introduced this year. In such receivers, as we shall proceed to show, very substantial noise reduction is obtained. Furthermore, since no external antenna or ground connection is necessary, complete simplicity of installation is attained; and such conditions as the scrambled wire appearance of apartment house roofs becomes a thing of the past.

Loop Antennas

When a loop antenna is used, it may be shown that the expression for the voltage (e) induced in the loop is:

$$e = nA\frac{2\pi}{\lambda}\sin\theta\,[E\cos(\omega t + 90°)] \quad (1)$$

In this expression, n = the number of turns in the loop, A = the area of the loop in square meters, π=3.1416 . . . , λ=the wave length in meters of the incoming signal, θ, is the angle between the direction from which the signal is coming and the perpendicular to the loop, E is the peak value of the field strength of the signal in volts, per meter, and the expression cos (ωt+90°) indicates that the voltage generated in the loop is 90° in phase ahead of the field of the incoming signal.

Equation (1) shows that the sensitivity of a loop is inversely proportional to the wave length of the incoming radiation. The factor sin θ shows the well known directional property of a loop. In particular it shows that the response is a maximum for a signal traveling in the plane of the loop, and that the response is a minimum for a signal traveling in a direction perpendicular to the loop.

The directivity of a loop is one of its means of noise reduction. By rotating a loop until the chief source of noise is in the direction of least response, a considerable decrease in noise may be obtained. This is particularly effective for distant noise sources. For local noise sources a more detailed investigation is required.

Local Noise

In Fig. 2 is shown a receiver with a conventional antenna. In this case, a signal voltage is picked up principally in the vertical part of the antenna, BA. This signal voltage causes current to flow in the antenna circuit which consists of the input coil, the antenna, the capacity between the antenna and ground, C_A, and the return path between the effective ground of the antenna capacity and the ground of the receiver chassis. In this latter branch, there may be a noise voltage, such as N in Fig. 2, which is induced from some local generator of noise. Now N is just as effective for causing antenna current to flow as the signal picked up in BA, so that N may be, and in practice actually is, a serious cause of disturbing noises. By reducing the impedance between ground of the receiver chassis and the effective ground of the antenna to as small a value as possible, the voltage drop induced across this link by any source of noise, is made small, and thus less noise is induced in the antenna circuit. It is for this reason that a good ground usually reduces noise in a receiver. Unfortunately, however, with the very best grounding attainable, noise generated by N may still be serious.

Reduction In Broadcast Reception

Another way in which local noise may get into the antenna circuit is by radiation from a local noise generator, such as N' in Fig. 2, if this radiation is picked up anywhere in the antenna circuit. Such a noise generator might be an electric razor, a sparking commutator, corona in a nearby power line, or one of countless other types of electrical apparatus. The same noise generator may cause transient currents in the house wiring creating noise of the type N, and may at the same time act as a miniature antenna system and radiate noise of the type N' to the receiver antenna circuit.

The Shielded Loop

To reduce the reception of noise of both the N and N' types, a shielded loop may be employed. To find out why the loop must be shielded, let us first consider an unshielded loop. The latter acts as a loop with an amount of pickup as indicated by Eq. (1), but, in addition, due to its capacity to ground, C_x, it also acts as a vertical antenna of effective height equal about to the physical height of the loop. Since the pickup of a pure loop is inherently small, the pickup of an unshielded loop as a vertical antenna may be equal to or greater than its pickup as a loop. As a vertical antenna, the loop picks up noise from N, so that its noise-to-signal ratio is as bad as that of a vertical antenna, if not worse. This condition can be improved considerably by using a loop which is balanced to ground, thus reducing the vertical pickup, as has sometimes been done in the past. However, a loop which is balanced to ground in one location will probably not be well-balanced in another. Furthermore, when screen-grid tubes are used, balanced circuits which allow the loop to be tuned and tracked with the oscillator over the broadcast band are very complicated.

The whole situation, however, becomes simplified and immensely improved if the loop is electrostatically shielded. Such a shield, if connected to the chassis, greatly reduces the capacity C_x. Thus the loop no longer acts as a vertical antenna and noise pickup from N is eliminated.

Let us next consider the action of the shield on locally radiated noise, such as N'. It is a well-known fact that near a transmitting antenna, where the distance, r, from the antenna is small in comparison with the wave-length, λ, of the radiated energy, the ratio of the electrical energy to the magnetic energy is about

$$3\left(\frac{\lambda}{2\pi r}\right)^2$$

However, at a great distance from the antenna, where r is many times as great as λ, the electrical and magnetic energies are equal. Therefore, an electrostatic shield around the loop, which does not shield the loop magnetically, removes a much greater percentage of local noise radiation than it does signal. For example, if λ is 300 meters, and the local noise source is 10 meters (33 ft.) from the loop, $3\left(\frac{\lambda}{2\pi r}\right)^2$ is 68. In this case a perfect shield would discriminate in favor of the signal as against the noise by a factor of about 68 (or 18 db). While perfect shielding is not obtained in practice the shielded loop is nevertheless very effective against local noise radiation of the type N'.

The directivity of the loop is also very valuable in reducing the N' type

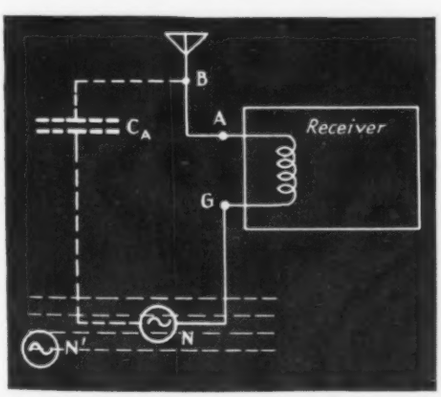

Fig. 2 (left)—Receiver and vertical antenna circuit showing two sources of noise voltage, N and N'.

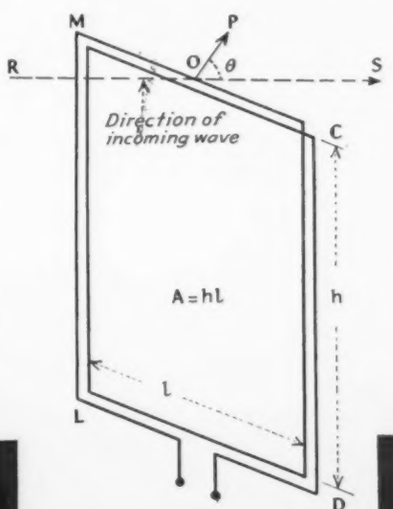

Fig. 1 (above)—Loop diagram for which equation (1) is derived.

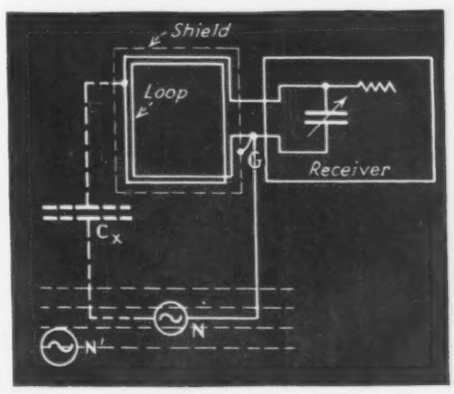

Fig. 3 (right)—Receiver with loop antenna. Unshielded loop antenna responds to noise voltages from N and N'.

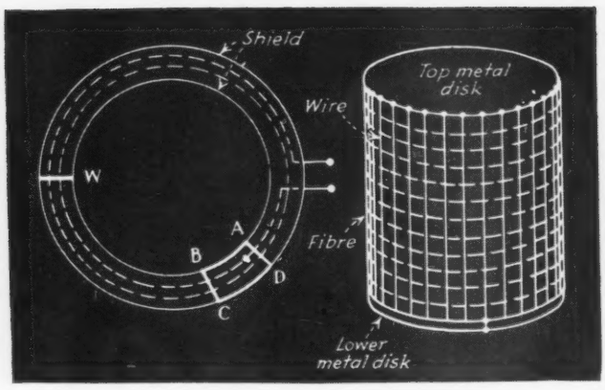

Fig. 4A (left)—Electrostatic shield in which loop winding is enclosed in metallic tube.
Fig. 4 (right)—Electrostatic shield of woven gauze as used in broadcast receiver.

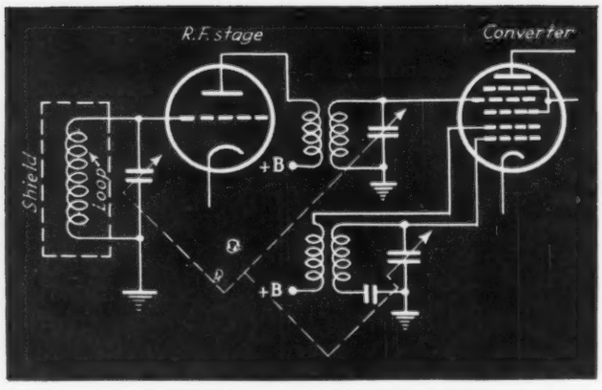

Fig. 5—Schematic wiring diagram of the input circuit for receiver having shielded loop for reducing electrical noise. Condenser tuning the loop is ganged with other tuning condensers.

of noise. By rotating the loop so that the principal noise source is in its direction of zero response, a large part of the residual noise can be eliminated. This is especially important since it aids materially in reducing the screen requirements to obtain the desired reduction in electrostatic pick-up.

Electrostatic Shield Designs

An electrostatic shield is one which will remove the electric component of the electromagnetic radiation which enters its enclosure, leaving only the magnetic component.

The general idea of making a good electrostatic shield for a loop is to make the electric shielding as good as possible, and at the same time not to affect the component of the magnetic intensity which is perpendicular to the loop, since the latter component generates the signal which is used. To accomplish the first objective the usual procedure is to try to make the shield an equipotential surface by spreading as much metal over it as possible, either in the form of wires or sheets. In order not to affect the useful magnetic component at the same time, it is necessary that there should be no closed conducting circuits in the shield unless they are perpendicular to the plane of the loop. This can really never be accomplished completely, since every sheet of metal and even every wire has closed conducting paths within it. Therefore the object is really to keep the area and conductivities of all closed circuits which are not perpendicular to the loop as small as possible. A good way to measure the extent to which this has been accomplished is to measure the Q of the loop with and without the shield, because all closed circuits of the undesired type will cause the Q of the loop to decrease. A more detailed theory of shielding would take into account the potential differences between the various parts of the shield, since these do exist at radio frequencies. We shall not, however, go into this matter here.

In Fig. 4 are shown two types of electrostatic shields. In the first (4A) the loop winding is enclosed in a metallic tube, the conductive path through the tubing in the direction of the loop being broken by the insulating washer, W. This has been widely used in aeronautical work. Closed circuits in this shield such as $ABCD$ which are parallel to the loop do reduce the Q, but since the area of any such circuit is small, the Q may still be good.

The shield in Fig. 4B is now being used in broadcast receivers. This shield is a simple right cylinder which completely enclosures the entire loop winding. Metal sheets cover the top and bottom faces of this cylinder, and the side is made of a coarse woven material in which the vertical threads are wire and the horizontal threads are a non-conducting fibre. Each vertical wire makes contact with the metal disc on the top, but only one wire makes electrical contact with the disc on the bottom. In this way, closed circuits parallel to the loop are reduced to a minimum.

Design of a Practical Loop

For reasons of styling, it is found desirable that the loop be placed in the lower compartment of a console receiver where it is not visible from the front. The space available for the loop is further restricted by the fact that a rotatable mounting and a shield must be provided. A loop of 21 turns, 10.5 inches high and 7.5 inches in width, was finally used. Although this loop is small, its sensitivity is about that of a good indoor antenna, the increased sensitivity being accomplished by tuning. In Fig. 5 is a schematic diagram of the tuned input circuit used. It is worth mentioning that since a loop is inductive it can be tuned over the whole broadcast band by a condenser which tracks with the oscillator so that no extra tuning control is needed. Tuning would not be practical in the case of an ordinary vertical antenna.

It is worth while to calculate the sensitivity of the loop just described. When the loop is rotated to its most sensitive position for a given signal, $\sin\theta$ (in Fig. 1) is equal to one, and the magnitude of the voltage impressed on the grid is

$$e = 2\,EQnhl\pi/\lambda \qquad (2$$

where Q is the quality factor ($\omega L/R$) of the loop circuit and E is the field strength of the signal. The loops described above had a Q of about 215, so that

$$e = 6.0\,E \qquad (3)$$

at a frequency of 1000 kc. The loop thus impresses a potential on the grid of the first tube equal to six times the field strength (volts per meter) of the incoming signal.

A photograph of a shielded loop is shown on page 20. A receiver using this antenna completely dispenses with the need for an antenna or ground wire. Furthermore, as we have shown, it has striking noise-reducing qualities.

Squeeze or Matted Track

By JOHN K. HILLIARD
Transmission Engineer, Metro-Goldwyn-Mayer Pictures

DURING the past few years several methods have been in use to reduce the ground noise which is inherent in film records. Some of these methods use a noise reduction system which varies with the percentage modulation, the reduction being zero at high modulation and increasing to a fixed amount at a low modulation (approximately 30%). This method is accomplished by a varying bias on the light valve and either a bias on the galvanometer or by an auxiliary pair of shutters. It has been restricted in release prints to a total of 10 db noise reduction by certain inherent range of electrical and photographic dimensions. For scenes which require less than 30% modulation over relatively long periods of time such as 10 feet or more, another method of providing noise reduction in variable density recording has been in use and is known as squeeze or matted track operation. This noise reduction is obtained by reducing the width of the track and simultaneously increasing the percent modulation such that the overall output remains linear. Since this method does not change during modulation, the increased noise reduction is very effective in further decreasing the background noise which is the equivalent of added volume range. The technique can be applied to advantage on whisper, intimate, extremely low level or completely silent scenes.

The matted track is obtained by introducing a "W" or "V" type mask in the light beam at a point in the optical system such that the edge of the mat is in focus at the film.

At present an interlock or selsyn motor system is used to drive the necessary equipment. Four motors are required to drive synchronously the mat, a compensating attenuator in the audio circuit, an indicator on the mixer table, and the master distributor operated by either a foot pedal or hand control of the mixer.

As much as 10 db squeeze is being used commercially. It is desirable to have the mat continuously variable so that it is not difficult to be able to insert and remove it easily. The original setups used matting in fixed amount and it was soon found that it could be used only in scenes of considerable length whereas with the continuous movement it can be withdrawn or inserted in the middle of a scene, and the amount of rehearsal time required to determine the amount of matting possible is reduced.

Fig. 1—Left. Single variable density double squeeze, showing transition from full width track to double squeeze track. Fig. 2—Right. Single variable density squeeze, showing change from full to squeeze track

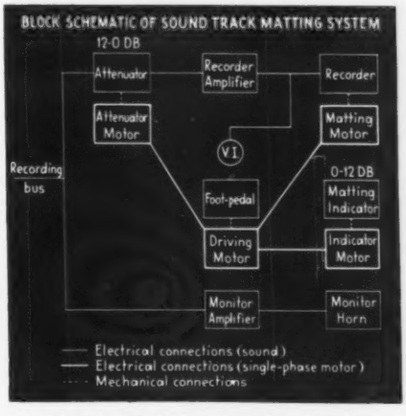

Fig. 3—Block diagram showing the functional arrangement of equipment for sound track matting system

The use of matted track requires that the slit of the reproducer have an even illumination across the entire 76 millimeter track width in order that there be no change in level with matting operation. An improvement in adjusting the slit illumination has resulted because of the demands of other systems of recording and field use indicates that the illumination is sufficiently uniform so as to obtain results that justify the method. In order to reduce the effect of a level change due to the lamp usually having greater illumination at the center than at the outside a "W" (Fig. 1) shaped mat has replaced the original "V" mat (Fig. 2). As a result the matted track then varies in such a manner that the extreme matted condition is not at the center of the lamp.

The "W" mat also requires no change for push-pull since each track is matted at about its center. The mat is also used to limit the track width to .076 inches, which is the new working standard for both variable area and variable density sound track.

Higher quality standards require less over-modulation and this added improvement in noise reduction can be used to maintain a good signal to noise ratio and hold the modulation on the film such that it is not excessive.

Principal uses for matted track are in musical pictures where it is necessary to fully modulate the musical passages and keep the dialog at a relatively low volume without surface noise becoming objectionable.

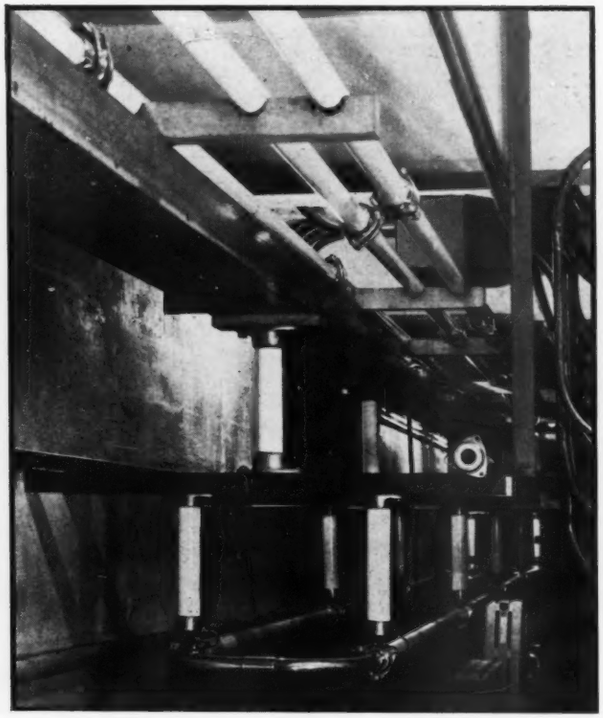

Fig. 1—Water system at broadcast station WHAM, in basement under the transmitter

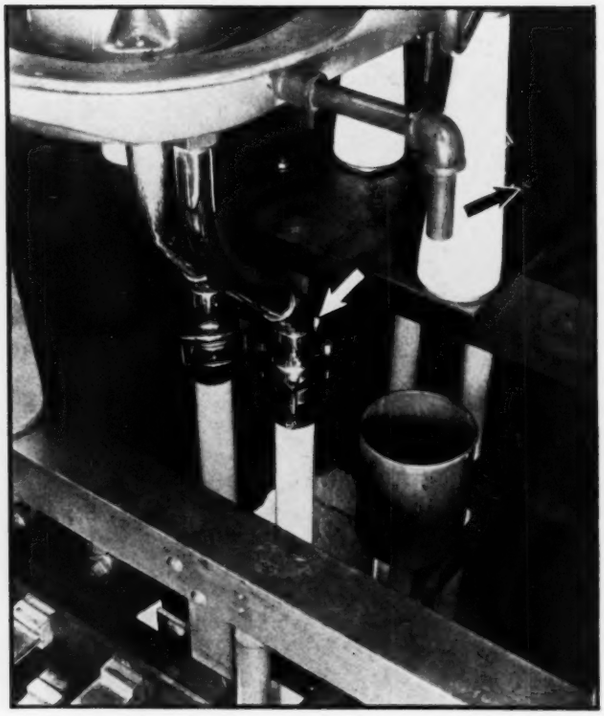

Fig. 2—Method of attaching the pipe to the water jackets. Note electrolysis target

Porcelain Pipe at WHAM

ALL broadcast station operators who have water cooled tubes to deal with, have experienced trouble with the water system used to cool the tubes. This trouble can be very serious in some cases. At WHAM, we are located about sixteen miles from the nearest source of distilled water, and in the winter we are often snowed in for several weeks. It is impractical to use a still with the well water we have at the station, so we must buy it in large quantities, and store it in the transmitter building.

We operate a Western Electric 306A, 50,000 watt transmitter and use about 130 gallons of distilled water in the cooling system. For the first year we had no trouble with the conductivity in the system. Shortly after a year, we began to get high leakage current in the water, and in two years, the thing began to be a real problem. The rubber hose deposited sludge and conducting minerals in the water and we had to change the water sometimes as often as once a week. In the original setup we had galvanized tanks. The galvanizing soon disappeared, and iron rust began to get into the water also.

The tanks were replaced with welded copper tanks, which were made locally by a sheet metal company. We specified welded tanks, because we were afraid of any soldered joints. Distilled water is very active when in contact with metals, and the use of one type of metal is recommended. We have red brass pipes in our system, but if we were doing it again we would use copper tubing with flared tube fittings.

The hose troughs are about 25 feet long, and are supported on insulators. We took the hoses out, and made up wooden supports to hold the porcelain pipe as shown in Fig. 1. This view shows the pipes running along the cellar under the transmitter. The pipe at the bottom, hung on insulators, is the loop across the 2nd power amplifier tubes. The total r-f voltage across the push-pull amplifier is across this loop. The resistance is so high that we have had absolutely no trouble with it. When we had a hose across at this point, we had to clean it very often as it put an added load on the amplifier as well as giving us loss from d-c leakage. At one time our old hose system put a total extra load of 9 kw on the high voltage rectifier! The loop circuit is left floating above ground, as this doubles the leakage path.

An end view of a spare piece of pipe with the fitting is shown in Fig. 1. The pipe used at WHAM is one inch diam. inside. The walls are made thick to prevent any breakage in case anything is dropped on them. Figure 4 shows the ends of the pipe with lead expansion loops connecting them to the pump connections. The leakage connection is made on one of these pipes, and connected to a milliammeter to give a check on the condition of the water. It runs normally about 2 ma. Figure 3 is a

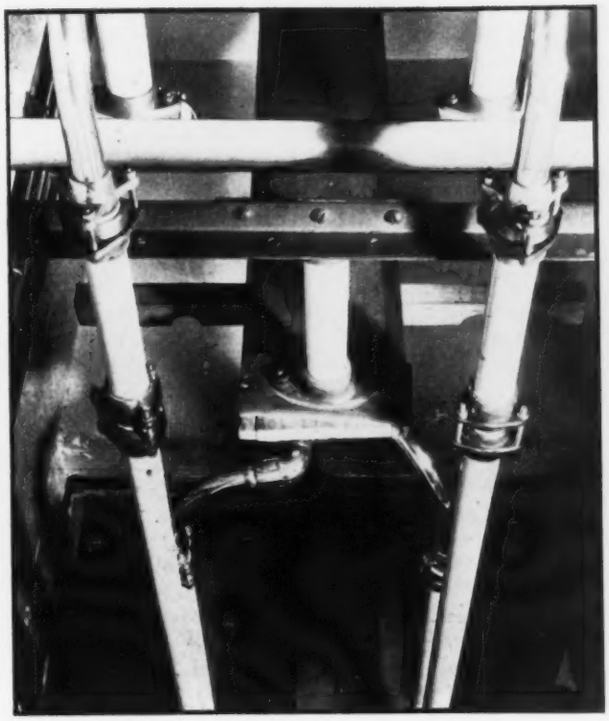

Fig. 3—Method of making bends with copper tubing and bronze fittings

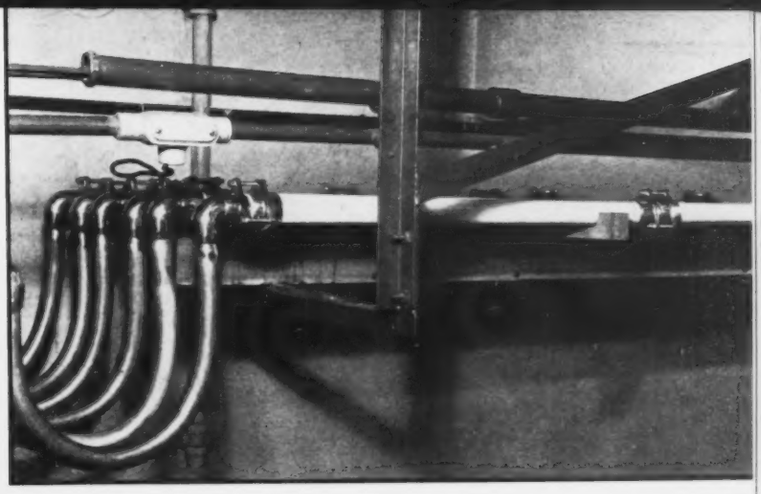

Fig. 4—Pipe ends with lead expansion loops connecting them to the pumps

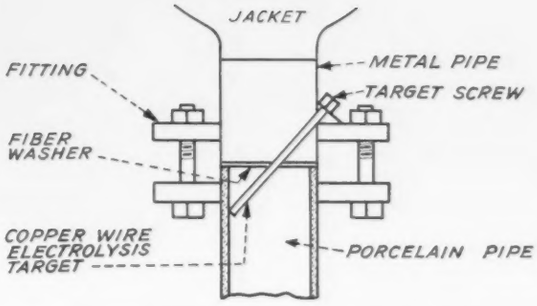

Fig. 5—Drawing showing how targets work

By JOHN J. LONG, JR.
Technical Supervisor, Station WHAM

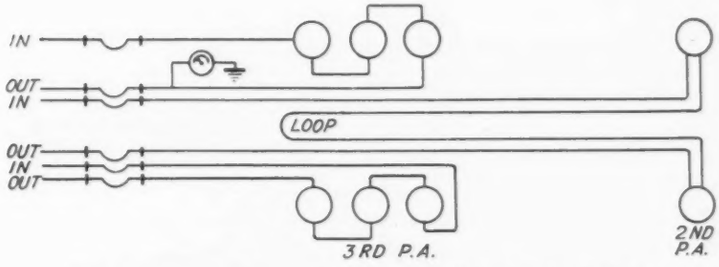

Fig. 6—Diagram of water lines to the different water jackets

view looking up under the 2nd power amplifier unit. This shows the method used to make bends with copper tubing and bronze fittings. The fittings are drawn together with three bolts, and a special type of fiber washer is placed between the ends of the porcelain. The fittings do not come in contact with the water at any place except on the metal bends. Washers with metal inserts were used at first, but it was found that the insert deteriorated.

In our installation, we have a small cellar under the transmitter which contains the hose troughs and duct boxes for the wiring.

Figure 2 shows the method of attaching the pipe to the water jacket. The arrows point to the electrolysis targets which are cap screws which have a piece of No. 4 copper wire soldered in the ends. This copper wire is about five inches long and projects down into the water below the point where the metal is attached. If these targets were not used, the fittings on the positive, or water jacketed, end of the line would be eaten away in time. These wires on the targets have to be renewed about once every two months. This will depend on the condition of the water however. High conductivity water will cause faster deterioration. We have only changed our water three times in a year, and the last changes were six months apart. Our system was pretty dirty when we changed to the porcelain pipe. With a new system, the water should not need changing for a year.

Our pipe and fittings were supplied by the Lapp Insulator Co. of LeRoy, N. Y. We are not very far from their plant, and were fortunate in having considerable advice and help from them in making the original installation. We estimate that the present system will pay for itself in three years, to say nothing of the reliability and trouble free operation it affords.

All new transmitters using water cooled tubes are using porcelain coils or pipes. We favor the pipes on any old transmitter that is to be changed over to porcelain, as they are easier to clean out with a fish wire and some cloth.

PARASITIC CIRCUITS

Parasitic oscillations are a source of erratic operation and reduced output in transmitters. Most troublesome cases occur when parasitic oscillation are at fundamental frequency. This article discusses remedies which have been found effective in practice

THERE has appeared a full discussion on parasitic oscillations which are caused by parasitic circuits in transmitters.[1] However, no mention has been made of parasitic circuits which absorb power from a transmitter stage on the fundamental frequency. Such circuits are especially troublesome in a transmitter covering a wide continuous band of frequencies, as parasitic oscillations must be avoided over the entire band. At the frequency for which a parasitic circuit is resonant, the power absorbed is often considerable. This power absorption may take place in a low powered stage, thus lowering the excitation to the next stage. Because of the diminished excitation, the power output and efficiency of the succeeding stage will be reduced. Parasitic circuits in the final stage of a transmitter will reduce the useful power output which may be obtained. In high power transmitters the components may be injured due to the high voltage which may be developed in a parasitic circuit.

Parasitic circuits are usually more evident when the transmitter covers a large continuous band of frequencies. An oscillator may actually stop oscillating over a small frequency range due to a parasitic circuit.

Typical Parasitic Circuits

A few typical parasitic circuits will be discussed in the following paragraphs. These circuits have all been encountered while testing transmitters.

The unshorted coil of a lower frequency band will become resonant at a higher frequency, due to its stray capacity. As there is nearly always some stray electrostatic or electromagnetic coupling to the circuit in use, the unused coil may take considerable power at its resonant frequency. The usual remedy is to short circuit the lower frequency unused coils. However, it has been found that this will not always cure the trouble for all frequencies. In one case it was found that a 500 kc. coil in the oscillator stage of a marine transmitter would absorb considerable power at approximately 13,000 kc. even though the coil was short circuited. This was indicated by a loss in excitation to the next stage. The 500 kc. coil was a two layer bank wound coil. The resonance apparently resulted from the inductance of each turn and the capacity between turns. The remedy used in this case was to shift the location of the coil so that the coupling to the other high frequency coil was very low. If a similar effect had occured in a high power stage the coil would probably have been injured due to the high voltages which would have been developed.

Another type of parasitic circuit is shown in Fig. 1. This was a frequency doubler stage in which the plate circuit was tuned to the second harmonic of the frequency applied to the grid of the first tube. The condenser C_B is a large by-pass condenser, C_T is a balanced ungrounded tuning condenser, and C_S is the stray capacity, which in this case was quite large. At approximately 12,000 kc. it was found that the circuit was not tuning correctly with the condenser C_T, and that the excitation to the two amplifier tubes was greatly unbalanced. At higher and lower frequencies the circuit operated as expected. It was found that the circuit shown by the heavy lines was resonant at the frequency at which it was desired to tune with C_T. The remedy used in this case was to change the inductance of the coil, so that this undesired resonance fell at a frequency at which this transmitter was normally not used. Another solution would have been to lower the stray capacity C_S to as low a value as possible. Connecting a balancing condenser whose capacitance is equal to that of C_S from the lower side of the tuning condenser C_T to ground, would also have eliminated the difficulty.

In another transmitter two separate tuned oscillator circuits were used with a single tube, the appropriate oscillator coil being selected by a band change switch. The unused coil was shorted. The circuit is shown in Fig. 2. It was necessary to ground one side of the tuning condenser, and as the tuning coil could not be grounded, the tuned circuit was completed through the 0.01 μf. fixed condenser for each oscillator circuit. When tuning the oscillator through the higher frequency band it was found that the oscillator would stop oscillating at about 11,000 kc., but would work correctly on either side of this narrow frequency band. An inspection of the circuit and some testing showed that there was a resonant circuit through the two 0.01 μf. condensers and the connecting lead between the two oscillators, as shown by the heavy lines in Fig. 2. A radio frequency choke was inserted at X between the two condensers, and this cured the trouble.

Another type of circuit which is similar to that above is shown in Fig. 3. As shown, the B+ lead and the by-pass condensers form a resonant circuit which may resonate

[1] Parasites and Instability in Radio Transmitters by G. W. Fyler. *Proc. I. R. E* vol. 23 p. 985. September, 1935.

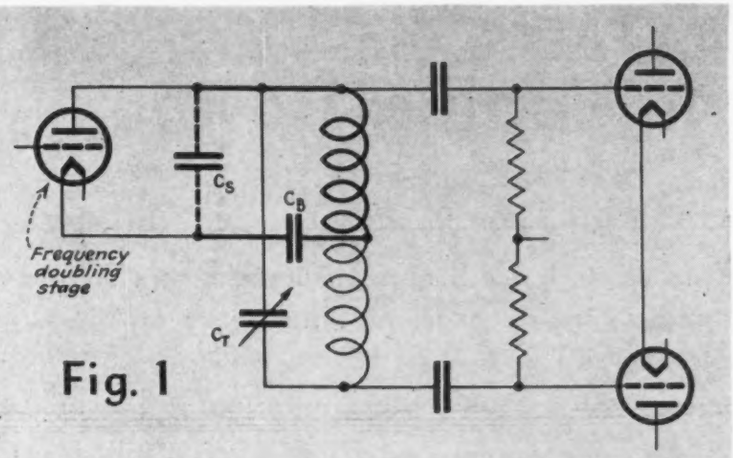

Fig. 1

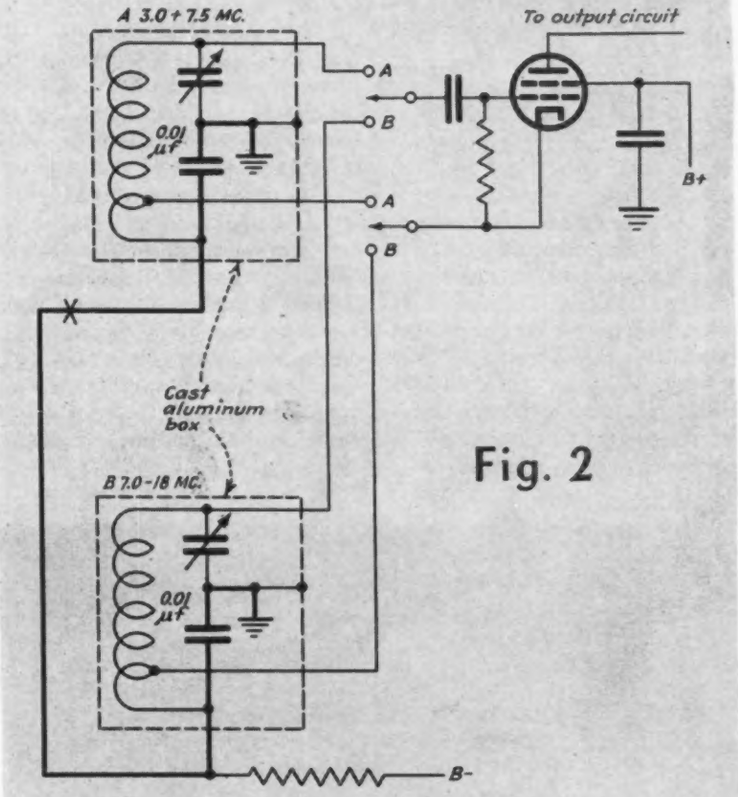

Fig. 2

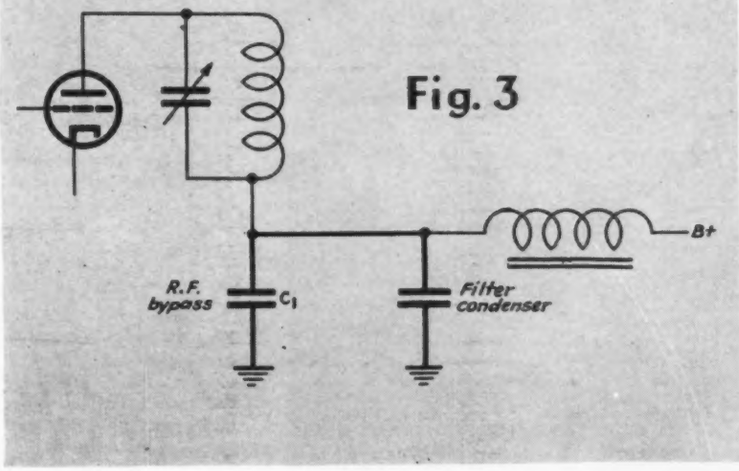

Fig. 3

By PHILIP A. EKSTRAND

Engineering Department
Heintz and Kaufman, Ltd.
South San Francisco, Calif.

at some frequency which is in the frequency band of the transmitter. This circuit is shown by the heavy lines. The effect is a partial loss of excitation to the next stage at this frequency, or a reduction in power output. Also, the radio frequency current flowing is very detrimental to the filter condenser. The remedy was to insert a radio frequency choke in the B+ between the by-pass and filter condensers.

Another type of parasitic circuit which sometimes occurs is due to a design where a closed loop circuit is formed. This often makes a transmitter stage hard to neutralize and to excite, and in general makes for poor performance. Of course the difficulty can be cured by opening up the loop circuit.

Discussion

Some parasitic circuits may be avoided by careful design. Other parasitic circuits may not be as obvious, and these must be located while the transmitter is being tested. In general, in a transmitter which tunes through a band of frequencies, there should not be a limited frequency range where the excitation to a stage is low, or where there is a marked drop in power output. If this does occur, it is usually an indication of a parasitic circuit which is absorbing power.

One type of parasitic circuit which is particularly objectionable is that in which two by-pass condensers placed some distance apart are connected in parallel. The connecting wire and the two condensers form a resonant circuit which may absorb considerable power. Therefore, care must be used to ascertain that the resonant frequency of a circuit consisting of two by-pass condensers connected in parallel, does not fall within the operating frequency range.

The same types of parasitic circuits can also occur in radio receivers. In this case, the sensitivity will be reduced at the resonant frequency of a parasitic circuit. Therefore receivers should always be designed to avoid parasitic circuits.

An Electric Timing Device

Simple timing device, using synchronous clock mechanism, phototube, and amplifier is described. May be used to transmit timing impulses or control time sequence operations. Low in cost; simple in construction

By ROBERT W. CARLSON
WBNY, Buffalo

AN accurate, inexpensive electric timing device operated by means of a synchronous electric clock mechanism in conjunction with a phototube and its accessory amplifier may be made to perform a wide variety of timing operations. At WBNY a simple timing device built along these lines has proven useful in transmitting time impulses or chimes every half hour, although the system to be described lends itself readily to the production of timing impulses at other time intervals if this is desired. The device is simple both in operation and construction, and the precision of operation is dependent, for all practical purposes, only upon the accuracy of the mean frequency of the a-c power supply line and the time operating characteristics of the relays in the control circuit. The frequency of regulated power supply lines from which clocks may be operated is usually maintained much more accurately than is ordinarily required. With proper care and attention, the time characteristics of the relay may be made quite uniform over a long period of time. Consequently the overall precision of the device is satisfactory for all ordinary purposes. In practice the timing device has been found to be accurate to within one sixtieth of a second.

The fundamental method of operation is indicated in Fig. 1. The essential elements of the system include a synchronous clock mechanism having the usual clock hands replaced with opaque discs having suitable apertures, a light source, and a phototube together with its associated amplifier and control circuit. The hour, minute, and second hands ro-

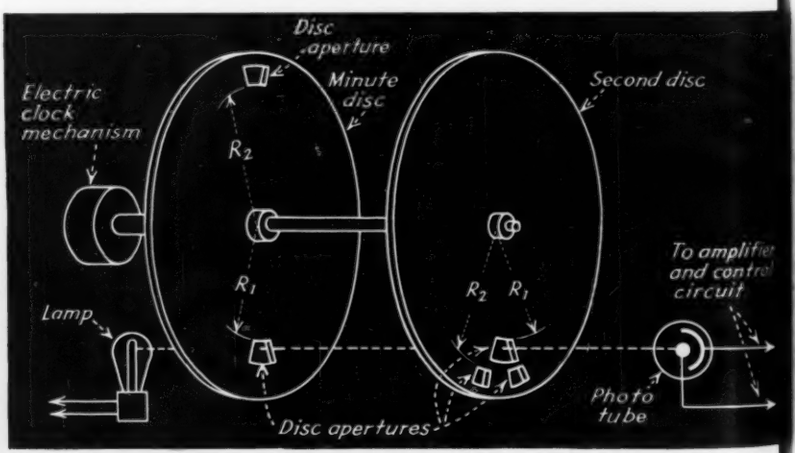

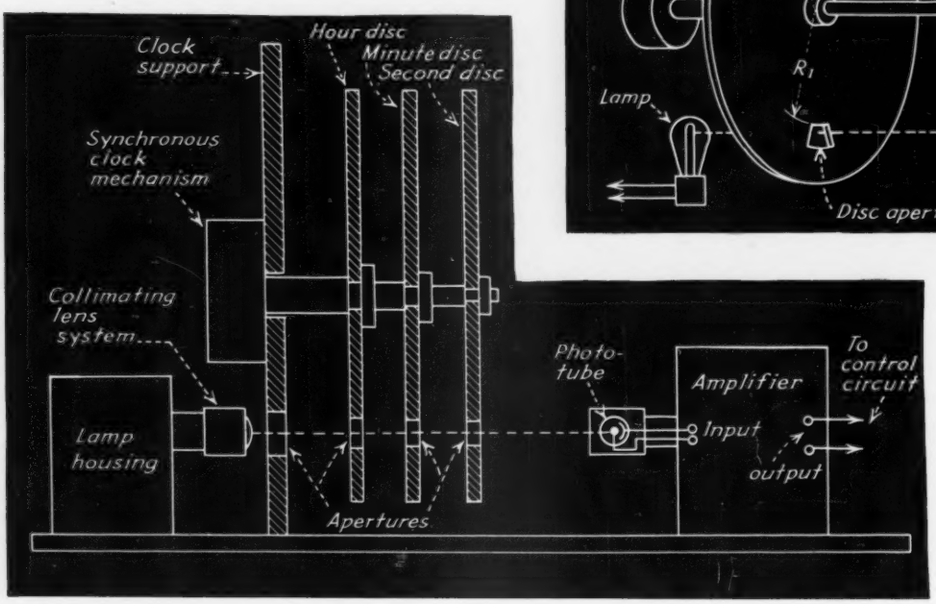

Fig. 1, left — Diagram showing the fundamental mode of operation of clock driven, phototube operated electric timing device

Fig. 2, above—Simplified and improved form of electric timer producing one pulse on the hour and two pulses every half hour

tate, respectively, once every twelve hours, once every hour, and once every minute, in accordance with the motion of the hands they replace. The discs are provided with one aperture each near their periphery, and by means of adjustable collars by which the discs are attached to their proper shafts, the apertures may be made to become aligned at any desired time, with the light source and phototube. The apertures, which are slightly wedge shaped are cut so as to subtend an arc of 6°.

When the apertures are aligned with the light source and the phototube, the light impulse acting on the phototube may be convered into an electric current impulse which may be made to operate any circuit in the output of the amplifier. The duration of the impulse is one second after which the light is cut off by the opaque disc of the second hand. When the aperture of the second hand returns to the position of original alignment with the lamp and phototube, the minute hand has moved 6° and cuts off the light so that no signal impulse is possible. With this method of operation, an impulse may be transmitted once every twelve hours.

Although only one lamp and phototube are shown in Fig. 1, it is possible to extend the fundamental method so that, through the use of a plurality of lamps and phototubes, impulses may be transmitted at several equally spaced time intervals throughout the day. Because such a system does not permit impulses to occur at convenient time intervals, another system was developed which operates every half hour.

An improved version of the fundamental system of operation, designed to transmit a single impulse every hour and two short pulses on the half hour is shown in Fig. 2. The apertures on the minute disc are 180° apart and are cut for two different radii, R_1 and R_2. One aperture on the second disc has a radius of R_1 and two adjacent apertures on this same disc have radii R_2. All of the apertures on the second disc are symmetrically placed along one radius vector rather than being displaced 180° as is the case with the minute disc.

Every hour on the hour the apertures on the two discs which have radius R_1 become aligned and a light impulse is permitted to flow to the phototube, actuating the control once. Hourly on the half hour, the apertures having radius R_2 become aligned with the lamp and phototube, and two short impulses actuate the control circuit through he intermediary of the amplifier and the phototube circuits.

With this arrangement, which was designed primarily to provide a time signal for use in broadcasting, a service highly appreciated by the listener, it can be seen how a tone or chime can be controlled by the relay circuit in the phototube amplifier.

It is important to select a type of phototube, amplifier, and relay whose operation is dependable, and whose time lag is small or at least very constant. It has been the author's experience that the emission type of photoelectric device performs most satisfactorily. The selenium or resistance type of photosensitive device was found unsatisfactory because of its lack of stability. The generating or barrier layer type of cell proved unstable with the heat developed by the voltage dropping resistors which were used in the amplifier.

A wide variety of amplifier circuits is available for amplifying the phototube current. Two circuits which have been found useful at WBNY are illustrated in Fig. 3 and Fig. 4, both of which operate directly from the 110 volt a-c line. The circuit shown in Fig. 3 operates in the absence of light, whereas that of Fig. 4 operates by virtue of the presence of a light beam.

Since the resistance of the phototube is likely to be much larger than the resistance in series with it, the major portion of the applied voltage will appear across the phototube. The peak instantaneous voltage across the phototube may be as much as 150 volts when the line voltage is 110 volts r.m.s. This voltage is in excess of the ionization potential of most gas phototubes. A vacuum type of phototube is recommended for use rather than a gas phototube which would ionize over a considerable portion of the positive half of the cycle.

As in all phototube circuits, careful attention must be given to the matter of insulation resistance if the circuit is to operate most satisfactorily.

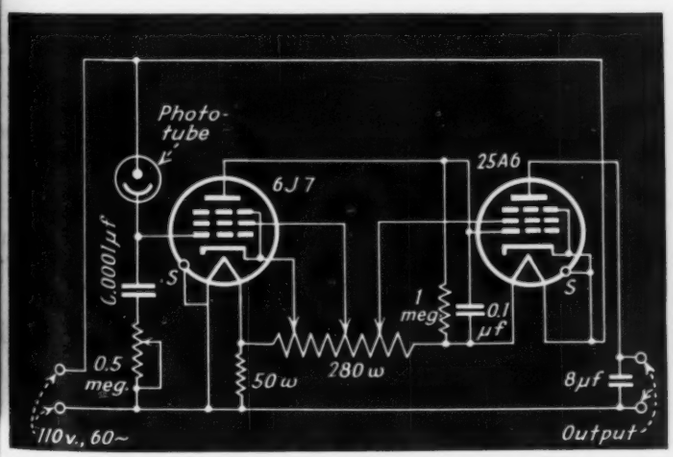

Fig. 3—A simple two stage a-c operated phototube circuit and amplifier functioning in a negative direction on the received light

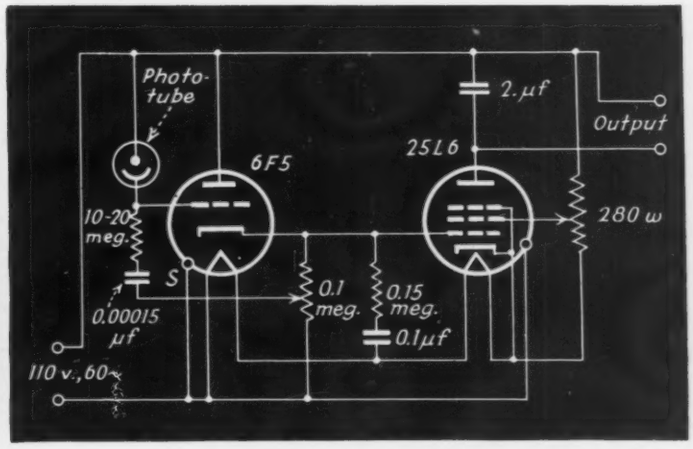

Fig. 4—Another simple a-c operated phototube control circuit operating in a positive direction on the light received by the phototube

NEW BOOKS

Television Engineering

By J. C. WILSON. *Isaac Pitman and Sons, Ltd., London, 1937. 492 pages, 276 illustrations. Price $10.00.*

THIS IS THE first book to appear within the "modern era" of cathode-ray television which can lay definite claim to the engineer's interest. (The second book, in point of time of appearance, Maloff and Epstein's "Electron Optics in Television" was reviewed in June *Electronics*). It is a solid book, carefully written, well illustrated, and except for the high price at which it must unfortunately be sold, has all the qualifications requisite to a place on the radio engineer's shelf of important books.

The volume opens with an historical survey, well backed up with references to technical literature and patent numbers, which in itself must have consumed many hours of the author's time and speaks well for his knowledge of the background of the art. Three important fundamentals of the subject, optics, scanning theory and methods, and photoelectricity, are treated at length in separate chapters, as are the design problems associated with wide-band amplifiers and related circuits. Cathode rays as applied to the reception of television images, and light modulation as it applies to transmission, are discussed at length. Synchronizing methods, with illustrations from British practice, and descriptions of typical, as well as specialized, television equipment are included. The book concludes with the important subject of the physical limitations imposed on a television system. Throughout the book are given extensive references to the literature.

The mathematical level assumed by the author varies with the subject under discussion, but in general it includes elementary calculus, series expansions, especially of the Fourier variety, and the geometrical symbolism of ordinary optics. In many parts the book must be studied, rather than read, and no attempt has been made to gloss over the difficult parts. The treatment of electric circuits is conventional and should be followed easily by engineers familiar with circuits in general.

The most obvious omission in the book is the almost total absence of any mention of the electronic methods of scanning at the transmitter. A paragraph or two mentions the existence of the Farnsworth dissector and the Zworykin iconoscope, but no explanation of their action and peculiarities are given. In fact the treatment of scanning is almost wholly confined to the rotating mechanical type of scanner which at present takes second place to the electronic methods throughout the world. From this point of view the book is not thoroughly representative of modern electronic practice. Cathode ray reception of images, on the other hand, is adequately treated. Another topic which might well have been included in the chapter on amplifiers and circuits is that of modulation and demodulation in wide-band channels. With these reservations, the book is recommended to those who have sufficient technical background to "wade in," and who desire an authoritative treatment of most, if not all, of the important fundamentals in television engineering—D.G.F.

• • •

Wireless Direction Finding

By R. KEEN. *Third Edition. Iliffe and Sons, Ltd., London, 1938. 803 pages, 549 illustrations, 25 shillings.*

THE SECOND EDITION of this book was published in 1927 under the title "Wireless Direction Finding and Directional Reception." In the eleven years which have since elapsed, the whole art of radio direction finding has undergone the most intensive development and its applications have been extended from the marine to the aeronautical fields. The third edition consequently has been greatly enlarged and contains a well-rounded discussion of the latest developments.

The book is primarily descriptive, but the theory of the subject is nevertheless well developed by means of diagrams and simple mathematics. Although written from the British point of view, with its differences in terminology, American apparatus is described fully.

It may be wondered how over 800 pages may be filled with a subject as specialized as radio d-f, but the answer is simply that the author writes with traditional British thoroughness, and that no topic having any connection with the subject has been neglected. Starting with the theory of wave propagation, and the directional properties of "frame" (loop) aerials, the author proceeds to descriptions of the well-known Bellini-Tossi system, the Adcock system, beacon systems for long range work, aircraft d-f equipment, etc., etc. Attention is given to the vagaries of direction-finding including polarization errors, night-effect, quadrantal errors due to installation, etc. Approach and landing systems (called instrument landing in this country) as applied to aircraft are fully covered. A chapter is especially devoted to maps and the proper ways of using them, a topic not often well understood by the radio engineer. A bibliography of 570 references concludes the volume, and gives a fair indication of the immense amount of work that has been done in this field. The book is recommended as "essential" to all those whose work has to do with direction finding systems, and as worth while to others who may have simply an academic interest in the subject.—D.G.F.

U-V STERILIZER



Ultra-violet-producing Sterilamps have been installed in the cafeteria of the Westinghouse Lamp Division to irradiate tableware. The ultra violet wavelengths used lie in the so-called "bactericidal" region of the spectrum

• • •

Science and Music

By SIR JAMES JEANS. *The MacMillan Company, New York, 1938. 258 pages, 64 illustrations, price $2.75.*

MOST RADIO ENGINEERS who have high fidelity receivers and/or phonograph reproducers pride themselves on being connoisseurs of music. They know a high frequency when they hear one (which is not so often at that), and they can tell the difference between a 40-cycle resonance peak and simple exhuberance on the part of a tuba player. But Sir James Jeans knows a great deal more about it than that, and he puts most of what he knows down on these 258 pages in such a way that any reader, technical or otherwise, cannot but profit from the reading of it. Sir James has long been known for his ability to make technicalities easy to take without reducing them to pulp, and his hand has not lost its customary cunning in the present instance. You can fool your friends with this one: "Which makes the better tone, a piano virtuoso striking but one note, or a lump of leading falling on the same note?" Sir James has oscillograms to show the difference, which is undetectable, but at the same time he gives the virtuoso his due when more than one note is to be struck.

Any engineer who is charged with designing an audio system on which music is reproduced ought to be required to read this book. Short of such compulsion we can only urge all such to read the book just for the fun of it. A considerable improvement in our feeling for, and handling of, reproduced music should result.—D.G.F.

DO YOU KNOW ALL THESE *Metallized* RESISTOR TYPES?

IRC
REG. U.S. PAT. OFF.
Initiative — Resourcefulness — Cooperation to advance the interests of the industry

The following exclusive IRC "Metallized" Resistor Types are available commercially today. All are detailed in the new IRC Engineering Data Bulletins No. 2 (Resistors) or No. 1 (Controls). Copies gladly sent upon request on company stationery:

LOW POWER . . . IRC Type BT Insulated Metallized Resistors. ½- 1- and 2-watts. 50 ohms to 20 megohms.

HIGH FREQUENCY (Low Power)... IRC Type F Metallized Resistors. 1/3 to 3 watts inclusive. 30 ohms to 100 megohms.

HIGH VOLTAGE . . . A spiral formation of "Metallized" element on these new IRC Type MV Resistors makes possible voltage ratings as high as 50 KV for a 10½" tube. Other sizes available. .25 to 100,000 megohms.

ULTRA HIGH RANGE . . . IRC Type FH and MG glass enclosed Metallized Resistors. 100 to 100,000 megohms.

HIGH FREQUENCY (High Power)... These newly developed IRC Type MP Resistors are unexcelled for ultra-high frequencies where power dissipation is required. 5 to 150 watts rating. 5 ohms and up.

VOLUME & TONE CONTROLS, POTENTIOMETERS, etc. . . . A complete line of single, dual and triple units for every requirement.

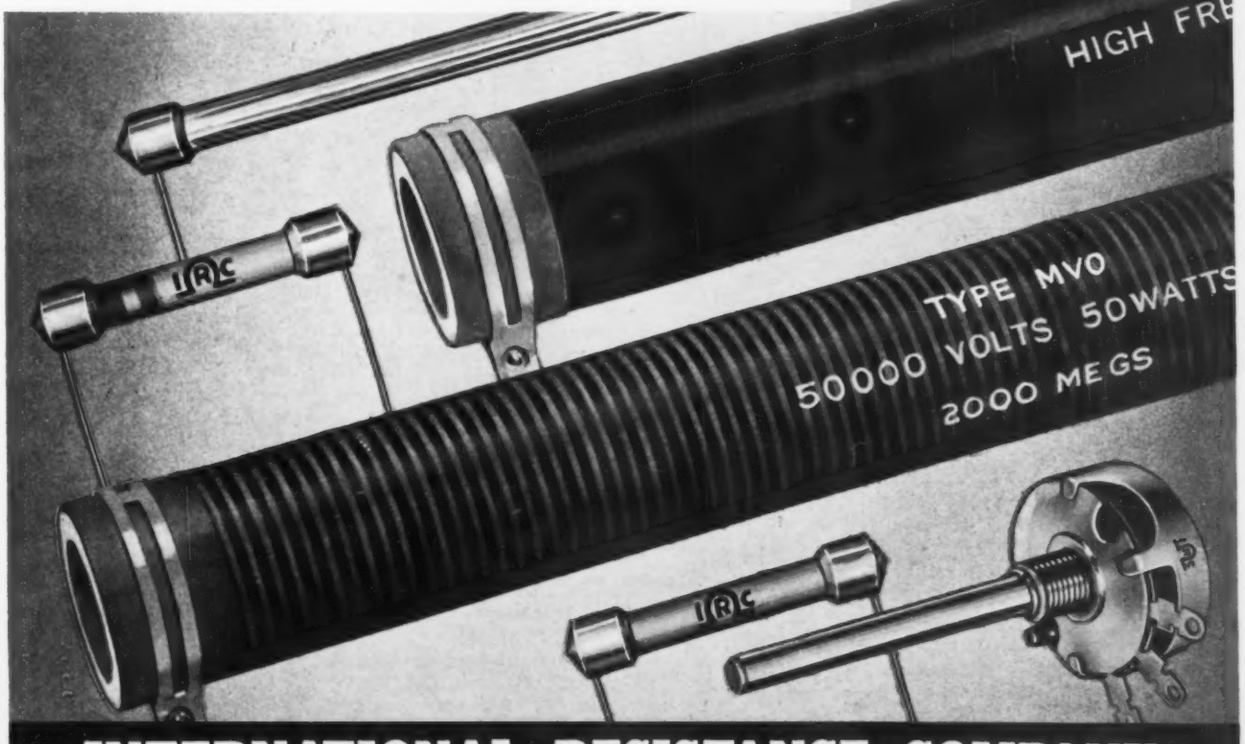

INTERNATIONAL RESISTANCE COMPANY

403 NORTH BROAD STREET, PHILADELPHIA, PA

In Canada, 187 Duchess Street, Toronto, Ontario

MAKERS OF RESISTANCE UNITS OF MORE TYPES, IN MORE SHAPES, FOR MORE APPLICATIONS THAN ANY OTHER MANUFACTURER IN THE WORLD

References on Radio Interference

Compiled By

L. F. ROEHMANN

Hastings-on-Hudson, N. Y.

This bibliography contains references to papers published before 1934 only if they are not referred to in:

A. E. TOOKE AND H. F. CHURCH, Classified Bibliography of Man-Made Radio Interference and Associated Measurements, *ERA Report M/T22*, 1934 (22 pp., pr. 5/6; contains 216 references on radio interference and 66 on field strength measurements).

I Books

H. G. ENGEL AND K. WINTER, Rundfunk ohne Stoerungen, Union Deutsche Verlagsgesellschaft, 1934.

A. DENNHARDT AND E. H. HIMLER, Leitfaden der Rundfunkentstoerung J. Springer, Wien, 1935 RM/3.75.

J. H. REYNER, Radio Interference and its Suppression (England) 1936 Sherwood Press $4.00.

II Regulations

USA How to Deal with "Man-Made Static", Tobe Deutschmann, Radio News 1929, vol. 10, p. 998.

GERMANY Gemeinschaftsarbeit zwischen der Deutschen Reichspost und der Vereinigung der Elektrizitaetswerke. Elektrizitaetswirtschaft 1932, Sept. 15, p. 387.

ITALY Protezione delle radioaudizioni contro i disturbi ed i pericoli provenienti dagli impianti elettrici. Comitato elettrotecnico italiano, Milan; Norme No. 15, 1933.

SWITZERLAND Directives pour le protection des installations radio-réceptrices contre les perturbations radioélectriques causées par les installations à fort et à faible courant. Assoc. Suisse des Electr. (Projet) Bull. Assoc. Suisse des Electr. 1934, vol. 25, no. 16, p. 450.

FRANCE A propos du quatrième congrès national de défense contre les perturbations radioélectriques. M. Adam. Rev. Gén. El. 1936 vol. 39, no. 6, p. 231.

ENGLAND A Standard Definition of Radio Interference. British Standards Institution BSS No. 800 1937.

III General

C. C. CAMPBELL AND H. N. KALB, Radio Coordination (California) *AIEE Trans.* 1932, vol. 51, March, p. 81.

R. BRAILLARD (Belgium) Contribution à l'étude des perturbations radiophoniques causées par les installations à haute tension. *CIGRE* Paris 1933. Rapport No. 102.

VDE 0870/1933, Leitsaetze fuer Kondensatoren der Rundfunk und Entstoerungstechnik, LKR. *ETZ* 1933, vol. 54, no. 20, p. 484.

A. S. ANGWIN, Electrical Interference with Broadcasting. *Tel. and Tel. J.* 1933, vol. 19, p. 200.

NELA Radio Interference, Publ. No. 33, 1933.

R. FELDTKELLER, Theorie der Fortleitung von Rundfunkstoerungen. *VN* 1934, vol. 4, no. 2, p. 107.

H. HAERTEL AND O. SCHNEIDER, Zehn Jahre Entstoerungstechnik bei Siemens und Halske. Siemens Z. 1935, vol. 15, no. 8, p. 432.

BRITISH STANDARDS INSTITUTION, London, Components for Radio-Interference Suppression Devices (excluding devices for traction equipment). *British standard specification No.* 613, 1935.

A. C. WARREN, Broadcast Interference Investigation. Post Office Radio Service. *P.O.E.E.* 1935/36, vol. 28, p. 23.

BRITISH JOINT COMMITTEE on Inductive Coordination, Electrical Interference with Broadcasting. *J. IEE* London 1936, vol. 79, p. 206.

R. FELDTKELLER, Wege im Kampf gegen die Rundfunkstoerungen. *VN* 1936, vol. 6, no. 2. V/1.

K. HAGENAUS, Das Spektrum von demodulierten Rundfunkstoerern *VN* 1936, vol. 6, no. 2, V/2.

K. HAGENAUS AND O. SCHNEIDER, Gesichtspunkte fuer die Errichtung funkstoerarmer Zweckbauten. *VN* 1936, vol. 6, no. 2, V/5.

F. E. SANFORD AND W. WEISE. A Review of Radio Interference Investigation, *El. Eng.* 1937, vol. 56, no. 10, p. 1248.

H. HARBICH, Ergebnisse der CISPR-Sachverstaendigen-Tagung in Bruessel vom 15. bis 17 Maerz 1937. *ETZ* 1937, vol. 58, no. 30, p. 820.

F. CONRAD, Versuch zur Rundfunkentstoerung einer Hochspannungsleitung auf einem begrenzten Abschnitt. *ETZ* 1937, vol. 58, no. 30, p. 813.

A. DENNHARDT, Betriebssicherheit von Starkstromanlagen und Rundfunkentstoerung. *Elektrizitaetswirtschaft* 1937, vol. 36, no. 1, p. 12.

R. MOEBES, Zur Frage niederfrequenter Rundfunkstoerungen bei Gleichrichterspeisung. *ETZ* 1938, vol. 59, no. 12, p. 311.

H. JACOBI, O. SCHNEIDER AND F. SCHUMANN, Entstoerungskondensatoren fuer hohe technische Anforderungen. *Siemens Z.* 1938, vol. 18, no. 1, p. 7.

IV Measuring Technique

Some Considerations in Measurement and Suppression of Radio Interference. *ERA Report M/T30*, 1934 (13 pp.)

A. SCHOENE, Stoersuchgeraet SuG 33 und tragbares Stoermessgeraet STMG 33. *VN* 1934, vol. 4, p. 115.

F. CONRAD AND H. REPPISCH, Ueber eine Messmethode zur Bestimmung der Stoerungsgroessen beim Rundfunkempfang. *El. Nachr. Techn.* 1934, vol. 11, no. 3, p. 114.

F. EPPEN AND K. MUELLER, Messung der Uebertragung von Stoerungen aus dem Starkstromnetz auf Antennen. *VN* 1934, vol. 4, no. 2, p. 101. *El Nachr. Techn.* 1934, vol. 11, no. 7, p. 257.

FR. VOGEL AND U. HENNECKE, Ueber Messungen im Rundfunk-Frequenz-gebiet. *VN* 1934, vol. 4, p. 351.

K. MUELLER, Ueber die Messung der charakteristischen Groessen von Rundfunksteoerern. *VN* 1934, vol. 4, p. 139.

A. DENNHARDT AND E. H. HIMMLER, Ueber ein tragbares Messgeraet zur Untersuchung von Stoerfeldern. *El Nachr. Techn.* 1935, vol. 12, no. 2, p.

K. MUELLER AND U. STEUDEL, Die Erfassung von Rundfunkstoerungen durch Lautstaerkemessungen. *VN* 1935, vol. 5, no. 2, VII/2.

H. REPPISCH AND F. SCHULTZ, Ueber die Messung des Hochfrequenz-Scheinwiderstandes von Starkstromnetzen. *El Nachr. Techn.* 1935, vol. 12, no. 4, p. 124. *VN* 1935, vol. 5, no. 2, VII/3.

NEMA, EEI, RMA, Methods of Measuring Radio Noise—A Report of Joint Coordination Committee on Radio Reception, 1935. *NEMA Publ.* No. 102. *EEI Publ.* No. C 9, *RMA Eng. Bull.* No. 13.

S. WHITEHEAD AND L. H. DANIEL, Methods of Measurement of Radio Interference. *ERA Report M/T45*, 1936 (22 pp.)

K. HAGENHAUS, Ueber den Stand der internationalen Verhandlungen zur Vereinheitlichung des Messverfahrens fuer Rundfunkstoerungen. *VN* 1937, vol. 7, no. 3, p. 437.

H. JUNGFER AND H. KOEPKE, Messungen an Rundfunkempfaengern. *ATM* 1936, V 373. *ETZ* 1937, vol. 58, no. 30, p. 809.

W. GERBER AND H. KOELLIKER, Messungen der hochfrequenten Fahrdraht-Impedanz von Strassenbahnen. *Bull. Schweizerischer El. V.* 1937, vol. 28, p. 655.

C. V. AGGERS, Radio Interference (describes noise meter), *Electric J.* 1937, vol. 34, p. 331.

BRITISH STANDARDS INSTITUTION, The characteristics and performance of apparatus for the measurement of radio interference. *British Standard Specifications*, London, no. 727, 1937.

V Interference from Insulators

F. O. MCMILLAN, Progress Report on Radio Interference from High-Voltage Transmission Lines—Pin and Pedestal Type Insulators. *NELA, Foreign Systems Coordination Comm.*, 1931.

J. L. LANGTON AND E. BRADSHAW. Radio Interference from Discharges on High-Voltage Line Insulators. *J. IEE* 1934, vol. 75, p. 643.

G. J. GILCHREST, Radio Influence Insulator Characteristics. *El Engg.* 1934, vol. 53, p. 899.

W. A. HILLEBRAND AND C. J. MILLER, Insulator Surface and Radio Effects. *El. Engg.* 1934, vol. 53, no. 8, p. 1213.

M. DICK, Untersuchungen der Radiostoerwirkung von Hochspannungsisolatoren. *Bull. Schweizerische El. Verein* 1935, vol. 26, p. 192.

R. VIEWEG, Starkstromtechnische Gesichtspunkte zur Frage der Funkempfangsstoerungen durch Hochspannungsisolatoren. *Elektrizitaetswirtschaft* 1935, vol. 34, p. 19.

A. DENNHARDT, Ursache und Messung der hochfrequenten Stoerhaufigkeit von Isolatoren. *CIGRE* Paris 1935, Rapport No. 241 and *Elektrizitaetswirtschaft* 1935, vol. 34, p. 15.

F. CONRAD, Empfangsstoerungen durch Hochspannungsisolatoren und ihre Beseitigung. *Telegr. und Fernsprech-Technik* 1936, vol. 25, p. 326.

B. MENGELE (Austria), Untersuchungen an Freileitungsisolatoren über den Stoereinfluss auf den Rundfunkempfang. *CIGRE* Paris 1935, Rapport No. 340, and *E u M* 1936, vol. 54, no. 16, p. 181.

F. B. DOOLITTLE, Line-Post Insulators Prove Worth on 66-Kv. Line. *El. World* 1936, vol. 105, no. 16, p. 32/1894.

A. DENNHARDT, Ueber Massnahmen zur Minderung der hochfrequenten Stoerfaehigkeit von Isolatoren. *VDE* Fachberichte 1936, p. 182.

VI Aerials

H.-G. ENGEL, Stoerfreie Antennen (a book) Dt.-llt. Inst. Schneider (Dt. Radio Buecherei) vol. 53, RM 1.50, 1933, 59 pp.

B. Ehlermann, Quantitatives ueber die Stoerschutzwirkung abgeschirmter Antennenzuleitungen. *VN* 1936, vol. 6, no. 2, V/6.

H. SCHINDLER AND O. SCHNEIDER, Ueber stoerungsarmen Rundfunkempfang durch Gemeinschazftsantennen ("common aerial") *ETZ* 1936, vol. 57, no. 28/29, pp. 801/829. *VN*. 1936, vol. 6, no. 2, V/4.

F. R. W. STRAFFORD, Screened Aerials. *Wireless World* 1937, vol. 41, p. 516.

K. MUELLER AND O. SCHNEIDER, Praktische Messung an Gemeinschaftsantennen-Anlagen. *Siemens. Z.* 1937, vol. 17, no. 7. *VN* 1937, vol. 7, no. 3, p. 459.

H. ROEHL, Vergleichende Untersuchungen an Stabantennen. *ETZ* 1937, vol. 58, p. 1345.

R. B. DOME, Radio Receiving Aerials of the Noise Reducing Type. *Gen. El. Rev.* 1937, vol. 40, no. 12, p. 580.

VII Interference from Other Sources

F. KRUG, Radio Interference Caused by Poorly Grounded Cable Sheath, *El. World* 1926, vol. 87, p. 718.

C. AGGERS and W. E. PAKALA, Radio Interference from Synchronous Converters, *El. Jour.* 1934, vol. 31, No. 3, p. 121.

S. WHITEHEAD and W. NETHERCOT, The Suppression of Short Wave Radiations from Automobile Ignition Systems, *ERA Report M/T28*, 1934 (17 pp.).

S. WHITEHEAD and L. H. DANIEL, Trolley Buses—Magnitude of Radio Frequency Disturbance from, and the Use of Condensers and other Devices in its Suppression, *ERA Report M/T39*, 1935 (27 pp.).

S. WHITEHEAD and L. H. DANIEL, Suppression of Broadcast Interference from Electric Lifts, *ERA Report M/T42* 1935 (19 pp.).

W. NETHERCOT, Short Wave Interference from Ignition Systems, *ERA Report M/T47*, 1936 (21 pp.).

W. NETHERCOT. Short Wave Radio Interference produced by Electro-Therapy Apparatus, *ERA Report M/T56*, 1936 (8 pp.).

Abbreviations

AIEE	American Institute of Electrical Engineers
ATM	Archiv fuer Technisches Messen
CIGRE	Congrès international des grands réseaux électriques à haute tension
EEI	Edison Electric Institute
ERA	British Electrical and Allied Industries Research Association, 15 Savoy St., London W. C. 2
ETZ	Elektrotechnische Zeitschrift
E u M	Elektrotechnik und Maschinenbau (Vienna)
IEE	Institute of Electrical Engineers (London)
NELA	National Electric Light Association
POEE	Post Office Electrical Engineers (London)
RMA	Radio Manufacturers Association
VN	Veroeff. auf dem Gebiet des Nachrichten-Wesens (Siemens, Germany)

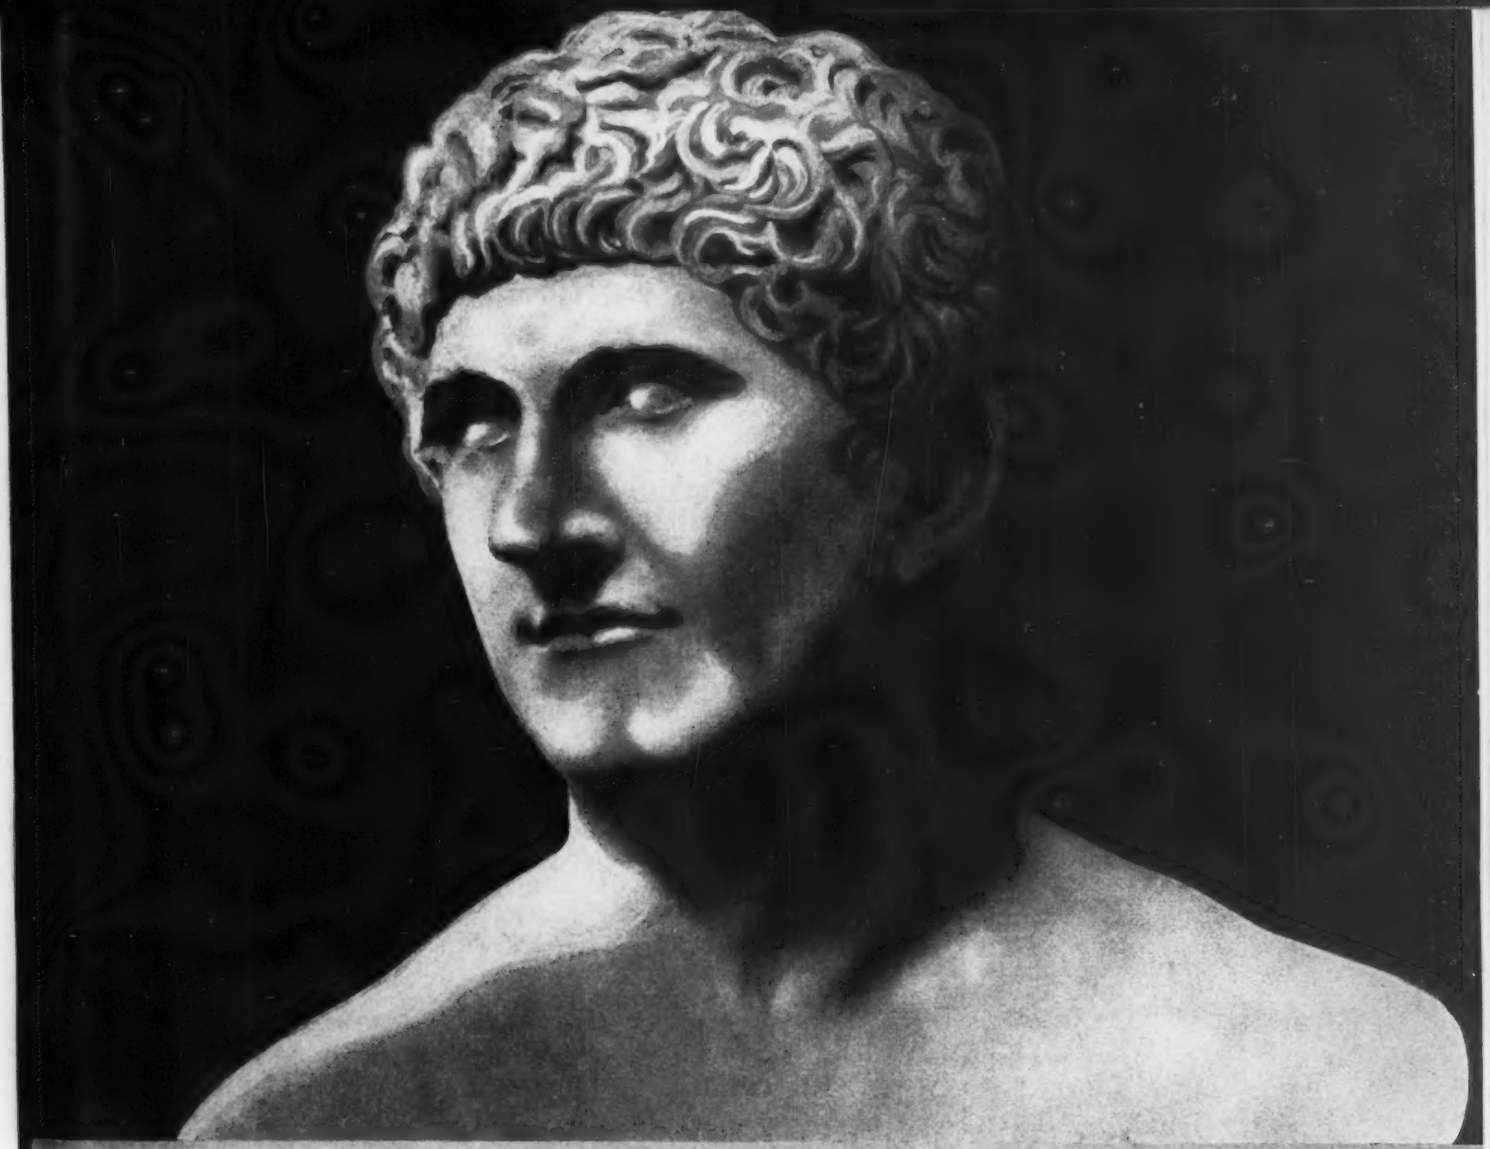

When One Speaks Now, 10,000 Hear

UNLIKE Mark Antony, the 1938 speaker does not have to borrow the ears of his countrymen. The public address system gives wings to words, carries them faithfully, clearly, vigorously to every listener. Manufacturers of public address equipment use Synthane speaker cones, also Synthane Bakelite-laminated for voice-coil bobbins, panels, terminal blocks, washers and other parts.

Why? Because Synthane has what public address system manufacturers want—what *you* may want—an unusually broad *combination* of physical, electrical, chemical and mechanical properties. Synthane is a dense, solid material, tough, strong and light in weight—an excellent insulator—with a low power factor, low moisture absorption, high dielectric strength, low dielectric constant. It's chemically inert and corrosion resistant. It has a minimum cold flow; machines easily.

Synthane is often the most economical material to use because of lowered production costs, better product performance, dependable adherence to standards. Why not write for data on Synthane, giving us your requirements? We might help you make more money.

SYNTHANE

Bakelite—laminated

SYNTHANE CORPORATION
EAST RIVER ROAD OAKS, PENNSYLVANIA

SHEETS • RODS • TUBES • FABRICATED PARTS • SILENT STABILIZED GEAR MATERIAL

TUBES AT WORK

AMONG the tube applications this month are measuring the "latheriness" of soap, regulating temperature directly from the thermometer dial, lighting neon signs without electrodes, and reproducing phonograph records via a negative conductance oscillator.

Phototube Indicates Softness of Water

A MEANS OF CONTROLLING a water softening machine automatically, using photoelectric tubes, has been disclosed in patent No. 2,122,824, recently issued to Eric Pick and assigned to the Permutit Co. of New York. The tester consists of the usual combination of a phototube and a light source between which is mounted a trough through which the water to be tested passes. A definite quantity of soap of known chemical properties is added to the water and stirred to create a lather which appears above the surface of the water in the trough and interrupts the light beam. Depending upon the amount of lather produced, the phototube relay can be used to actuate a water softening machine as the need for it arises.

• • •

Induction Pick-Up Regulates Temperature Directly from Indicator Pointer

AN INGENIOUS ARRANGEMENT for transferring the indications of an electrical thermometer directly to a heat-control circuit has been developed by the Wheelco Instrument Co. of Chicago. The indicating instrument is of the millivoltmeter type, used in conjunction with the standard thermocouple unit. As shown in the diagram, the indicator pointer carries with it a small circular vane made of aluminum foil, which adds but negligible weight to the pointer assembly. Attached to the case of the instrument is another pointer which is adjustable manually to the position on the scale at which temperature control is required. Attached to this pointer are two small coils of silk-covered wire so arranged that at any position on the scale they allow the aluminum vane previously mentioned to pass directly between them. These coils are energized with radio frequency energy from a vacuum tube oscillator mounted within the case of the instrument. When the pointer moves within the near vicinity of the coil position, the aluminum vane enters the space between the two coils, and eddy currents are induced in it. These losses result in a change in frequency of oscillation, and this change in frequency is detected in a tuned circuit so that the current drawn by the radio tube oscillator changes in proportion to the change in frequency. The current change operates a relay which in turn controls the contactor in series with the heat supply of the furnace.

Since the control depends only upon the production of eddy currents, and

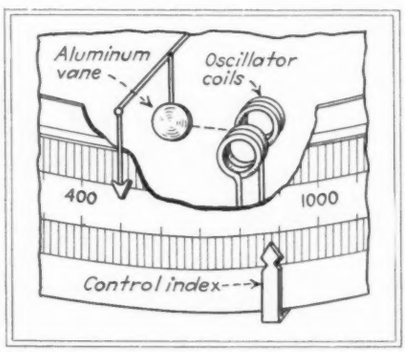

Arrangement of pick-up coils and aluminum vane

since there are no ferromagnetic elements involved, there is no force exhibited between the coils and the aluminum vane. Consequently, the control system does not advance or retard the indication of the pointer itself.

In one variation of the instrument, the heating current is periodically turned on and off whenever the pointer is within a few degrees of the control position. Usually the control range is 30 deg. F. wide. At the lower edge of this range heat is applied continuously. At 6 degrees higher (20 per cent of the total range) heat is off only 20 per cent of the time; at 12 degrees above the lowest position, (40 per cent higher), the heat is off 40 per cent of the time and so on until at the top of the 30-deg. band the heat is off 100 per cent of the time. This proportioning control system has the effect of completely eliminating time lag, overshooting, and hunting.

• • •

Electrode-less Neon Tubes Excited by Radio Frequency Energy

THE EXCITATION of light from rarefied gases by radio frequency bombardment has been applied recently in a new type of neon sign. The conventional neon sign consists of an evacuated tube fitted with two electrodes and containing rare gas at low pressure. The expense of the electrodes and of inserting them in the tubes has resulted in the practice of combining many letters in one tube, the regions between letters being painted out by covering the tube with on opaque paint. The high voltages employed necessitate placing the tubes several inches from the main body of the sign itself to obtain the necessary insulation.

In the new system of tube lighting, each individual letter in the sign is formed separately and consists of a tube

(Continued on page 52)

WATERCOOLED QUARTZ LAMP

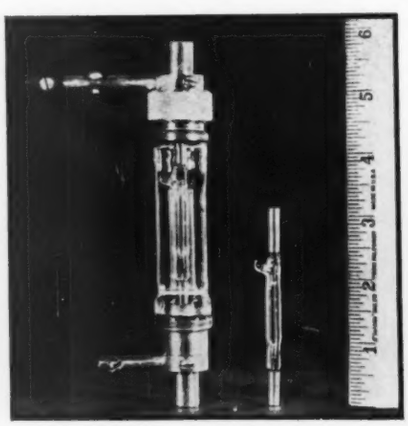

Announced coincidentally by General Electric and Westinghouse, a new 1,000-watt high pressure mercury lamp, shown at right above, is cooled by running water through a jacket surrounding the lamp. The water filters out much of the infrared but allows the ultraviolet and visible radiation to escape. The brilliance attained is about one-fifth that of the sun's surface

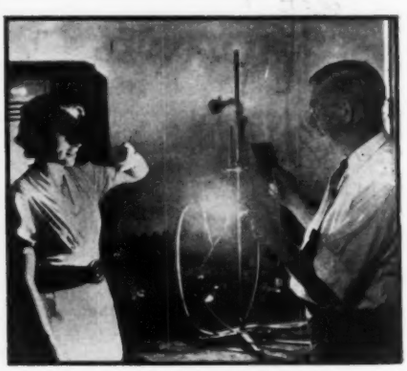

The Westinghouse version of the new lamp is demonstrated by Dr. J. W. Marden. The compactness of the source is one of its important advantages. It is expected to revolutionize methods in the photoengraving industry, as well as in searchlight practice

PUBLIC RELATIONS in Industry

With special reference to industries based upon the electron tube

electronics

A McGRAW-HILL PUBLICATION

OCTOBER 1938

An Editorial Service to Meet

INDUSTRY'S MAJOR PROBLEM

TO THE READERS
OF ELECTRONICS

There is no doubt that today the American people are taking a keener, more critical interest in the conduct of business than ever before. And when I say critical, I mean exactly that. During recent years most of them have suffered loss, either of jobs or of savings, and under such circumstances men are prone to accept without serious question any scapegoat that appears plausible. In the confusion of fears and resentments, they seem to have concluded that shortsighted and selfish business management is chiefly responsible for their misfortune.

However mistaken and unfair such conclusions may be, management cannot ignore them. It must recognize that in the long run, the opinions of men are the result of experience, of what happens to them each day, much more than of what they are told.

Progressive management has already faced that fact; has already begun to think and work beyond the technicalities of production and distribution that once absorbed most of its energies. It sees more clearly and deals more proficiently with its human responsibilities. It is learning to reconcile the economic success of the industrial unit with the social welfare of worker and community.

Presently, every business—the small retailer as well as the large manufacturer — must learn how to interpret more convincingly to its own public the social as well as the economic benefits of its policies and accomplishments. Only as each business satisfies the newly aroused and critical interest of people in its affairs will it be able to disarm those who trade on the human tendency to blame our troubles on someone else. Yes, if business as a whole is to win a favorable public opinion, each and every business must act to improve its own public relations.

The readers of this journal, and of other business publications, compose, we believe, a group that can achieve for American business a sound and lasting solution of this vital problem. They alone are in position to shape the working conditions of 21 million employees. They alone can mould the attitude of those other millions who compose the various "publics" to which all business must be responsible.

Heretofore, the function of business papers has been to exchange successful experience; to dig up and disseminate practical facts for the use of their readers, serving primarily the technical and merchandising needs of business. But this matter of human relations has now become of equal importance, for good industrial and public relations, it has been found, reduce corporate losses, remove fear and suspicion, promote operating efficiencies in both production and sales. A better knowledge of public relations technique is, therefore, quite properly essential for men in, or moving into, positions of greater executive responsibility.

So, beginning with this insert, each McGraw-Hill publication sets out to strengthen its editorial service in the important domain of Public Relations. I hope that the million readers of McGraw-Hill's business papers will get much real and practical help toward building better relationships between their own businesses and their employees, their customers, and the communities in which they must carry on.

James H. McGraw, Jr.

President, McGraw-Hill Publishing Co., Inc.

WHY

A Public Relations Program

IN LESS than two generations the United States has changed from an agricultural to an industrial nation. Living standards and efficiencies at once the despair and envy of other countries have been created. Foreign delegations still flock to our shores to study our methods so that they may use them as patterns for their own organizations. Yet here at home today these methods and the systems responsible for them are under increasing attack.

Since every person employed in productive enterprise is a part of American industry, these attacks imperil the livelihood of nearly forty million workers and their dependents. The newest addition to the payroll has as much—if not more—at stake as the veteran business executive. That also is true of particular industries which at present may not be under direct fire. All industry is so interrelated and interdependent that even the seemingly immune enterprise must suffer when the legitimate activities and the buying power of their customers, or the customers of their customers, are curtailed.

Ironically enough, public acquiescence in many of the current attacks is an indirect recognition of the satisfactory manner in which our industrial system normally functions. Reasonable opportunities for the employment of those ambitious to put their mental or physical talents to work, and continually rising standards of living have come to be widely accepted as a matter of course. Any unfavorable change in these conditions leaves the general public surprised, confused and resentful. Such reactions as these make it easy for pressure groups to unloose destructive propaganda which further heightens resentments and breeds new misconceptions.

These misconceptions take many forms shaped by the experience, the inexperience, or the special interests of the critics. To one it appears that business can't manage itself and must be owned and managed by the Government. Another believes that employees are underpaid or that stockholders and executives are overpaid. To others corporate surpluses are too high. Many have convinced themselves that power and machines have reduced employment opportunities; and that industry can raise wages and reduce prices while costs go up.

Several misconceptions are based on faulty generalizations. Because a few companies have been remarkably successful, it is argued that all could make money. Because some corporations have been ruthless, all corporations, it is contended, will stoop to unethical conduct to gain their ends. This is like saying: John Smith killed Bill Brown; John Smith is auburn-thatched; all redheads, therefore, are murderers. Unfortunately, those who would indict all business for the crimes of a few are more subtle in their approach and so create an impression not in accord with the facts.

To put it bluntly, American industry, once so highly praised for its contributions to the national well-being, is now on the spot. Prevailing misconceptions of how business operates and what it does have made a field day for those who propose to hamstring or destroy private initiative and individual opportunity. These proposals run a broad gamut; they include public ownership, increasing and rigid federal control at

Industrial contributions of research and invention in United States. Curves showing motor car and airplane production parallel closely data on telephone growth and increases in annual radio apparatus production. (Source, National Industrial Conference Board.)

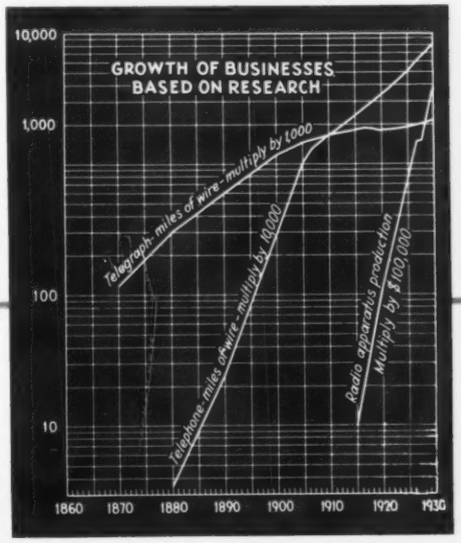

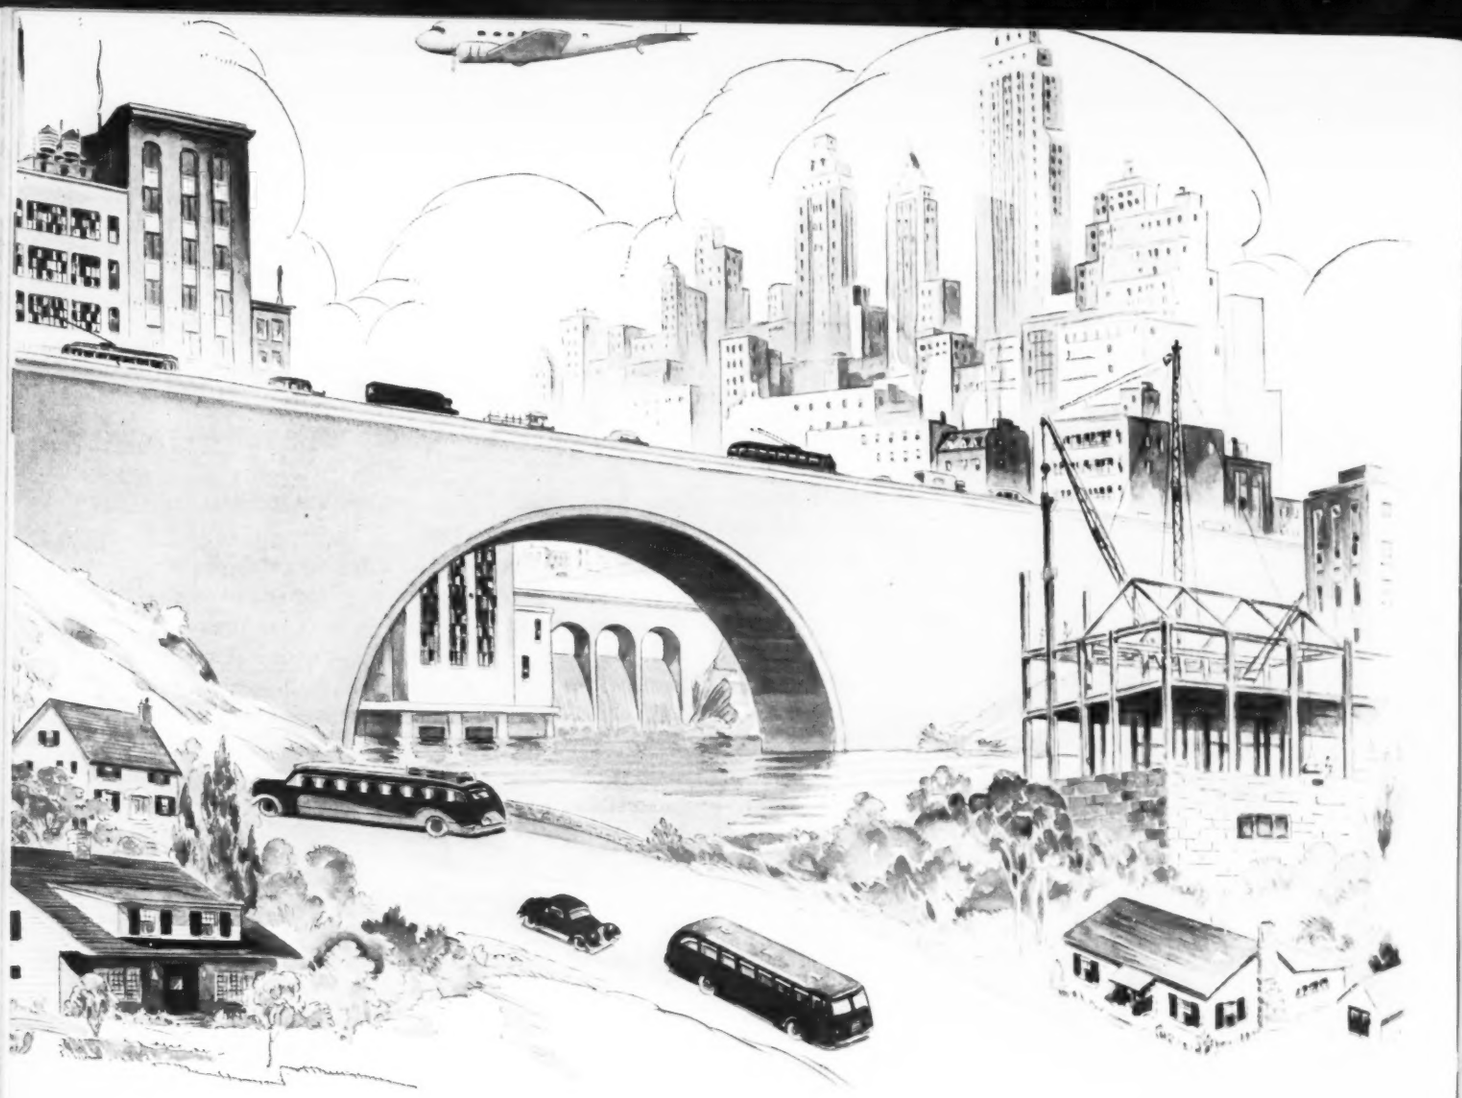

the expense of local autonomy, ill-conceived legislation on hours and wages, labor dictatorships, and confiscatory taxes on thrift and employment security.

While the man in the street may be criticized for his willingness to swallow these nostrums, he is not wholly to blame. Industry, too, has been at fault, in assuming either that he was fully informed on those phases of its operations which are properly a matter of public interest, or that a healthy curiosity should be discouraged. Misconceptions multiply where the facts are hidden.

The tragedy of the situation lies in the fact that it might easily have been avoided. In the simple days of local and localized industry, everybody connected with a particular enterprise knew everybody else connected with it, and the details of its operations were an open book. The boss and the employees were neighbors; the customers, for the most part, fellow townsmen. Outside purchases were limited largely to those products which the local community neither manufactured nor raised. Competition in the modern sense was practically non-existent.

As industry developed and enlarged its field of operations, much of this early intimate personal touch was lost. The small enterprise grew bigger. In some cases combinations took in the local business and financial control passed out of the community. The local industry which still retained its identity was busy meeting increased competition and seeking to expand its distribution. Little attention was paid to changing conditions that were fostering misconceptions about the personal relations of the business. Bit by bit the close acquaintance and familiarity of the early days disappeared.

Common understanding of these things also was impeded by the greater variety of occupations as in-

dustry expanded. Each man's job became so highly specialized that the old feeling of common partnership in a joint undertaking frequently was buried in an exaggerated feeling of the relative importance of his own work. This made it easy for each occupational group to get the idea that its contribution to the undertaking alone was essential and that many of the other groups were parasitic or, at best, unimportant.

Such mistaken beliefs are the exclusive property of no particular group. "Goods are valueless until sold," chants the sales staff; "without us the wheels of industry would cease to turn." "The wheels would turn much faster," growls the production department, "if we didn't have so many lame-brains drawing fat salaries as salesmen." Under the cold glance of both groups, the clerical force heatedly inquires: "How long do you think this business would last if we didn't keep the cost records, send out bills and collect the money for pay checks?" Some executives and engineers, too, have been known to forget that their plans cannot be carried out without the cooperation of other groups.

Possibly the greatest single cause of misunderstanding and friction has been fuzzy thinking on social responsibilities. Many of the responsibilities which rested on the individual or the state in our fathers' and grandfathers' days have been shifted to the shoulders of industry. New ones constantly are added or proposed—often before industry has had time to adjust itself to those which have gone before. Some of these responsibilities affect employee relations; others involve customer relations. The worker, for example, no longer is completely defenseless against the occupational hazards of his employment. "Let the buyer beware" no longer is considered smart merchandising. Many of the changes now embodied in the laws were anticipated by industry itself. Opposition—valid or

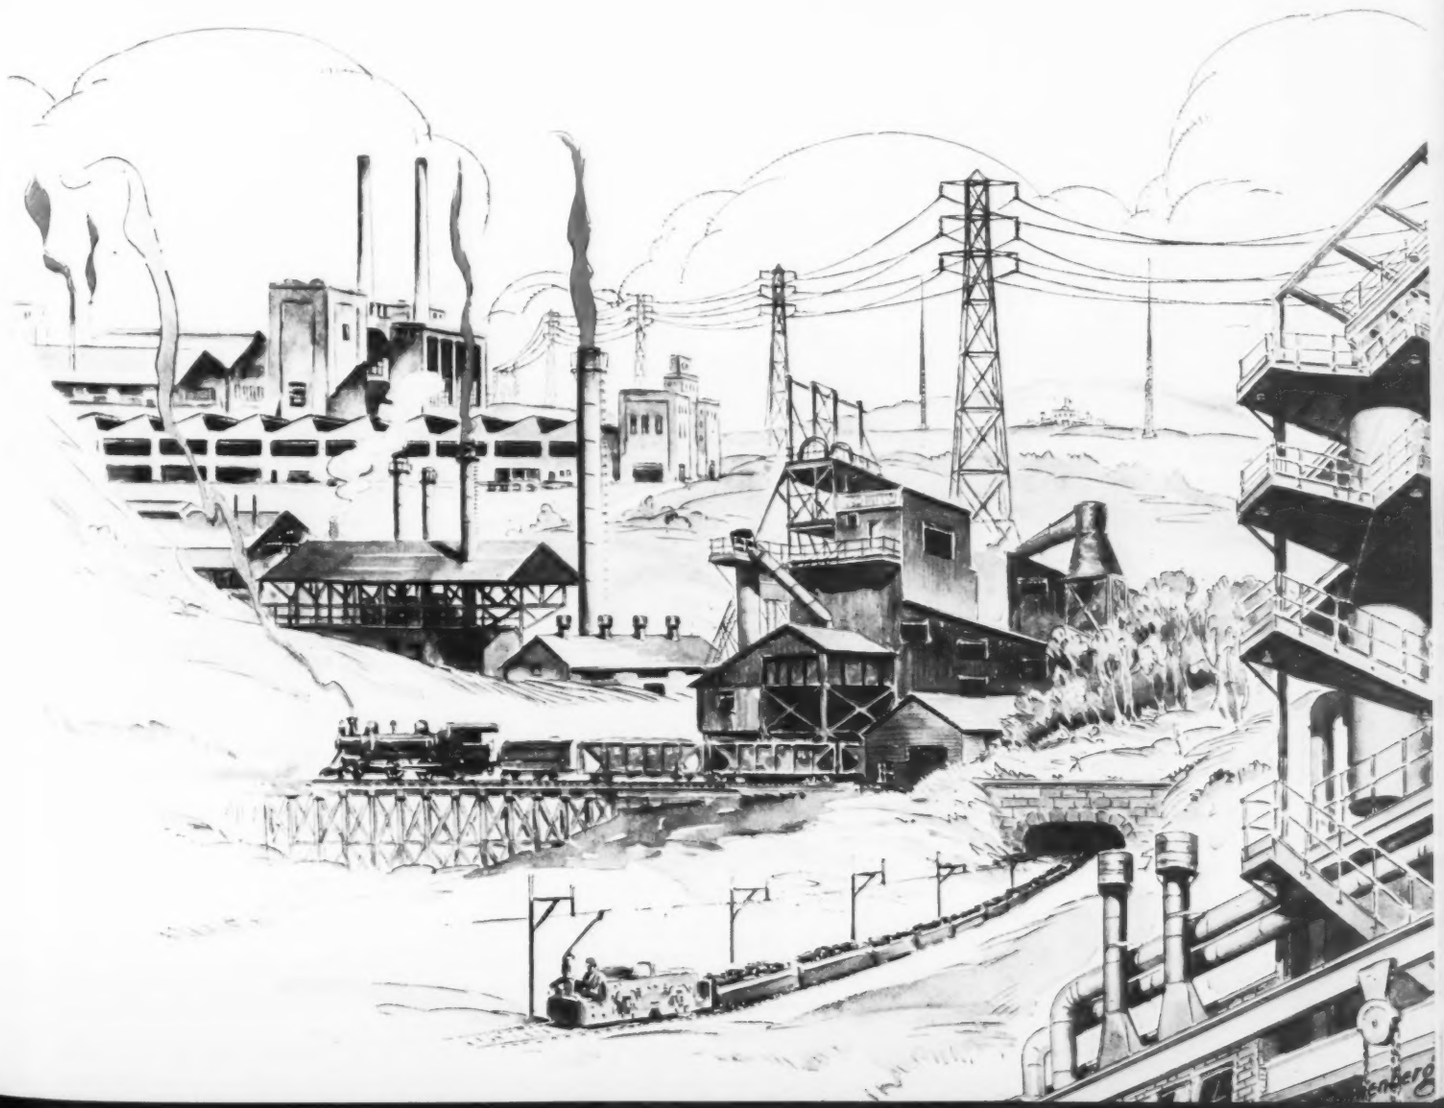

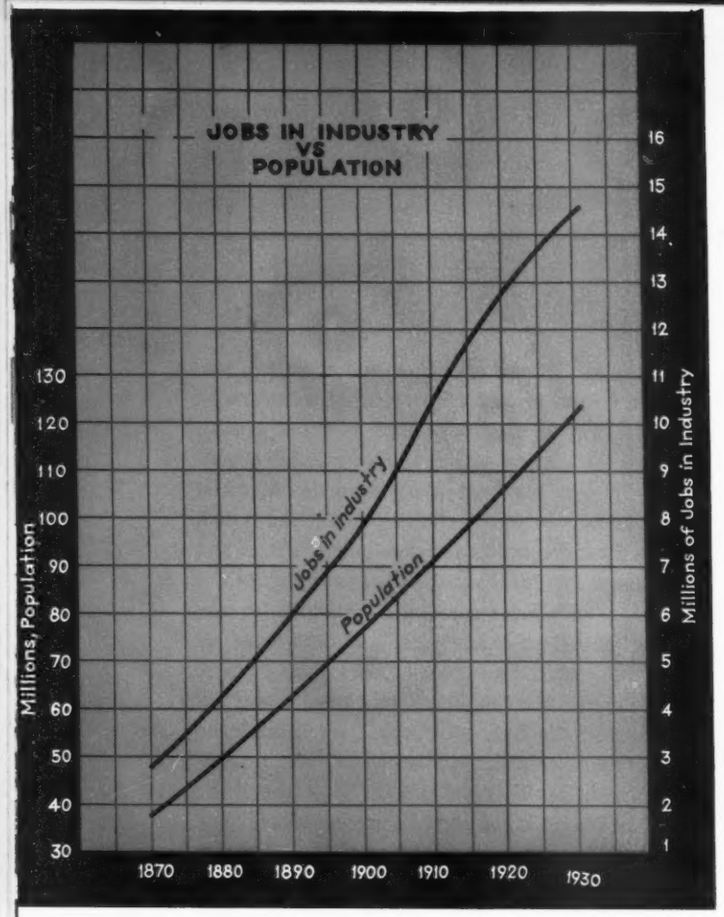

Industrial jobs have grown faster than the population has increased. New industries depend upon research and invention.

otherwise—to social legislation, however, has been used to damn business in the public eye.

Fortunately, the barriers to good will and common understanding can be broken down. The process is a simple one. It consists chiefly in maintaining good policies in human relationships and in keeping all interested people—employees, stockholders and their neighbors, customers and the general public—informed. It means telling them in plain terms what revenue is received and where it comes from, what revenue is paid out and who gets it, how an industry serves the individual, the community and other industries. Finally, it includes the acceptance of the social responsibilities which the advance of civilization imposes upon business.

Add all these things together and you have public relations.

Most employers are willing to accept their social responsibilities, but they are inexpert in making that acceptance articulate. Too many employers have failed to make clear their policies, their practices and their purposes as they relate to fair dealing with employees, investors and the general public. Their intentions have been good, but they have cloaked them with a veil of secrecy and made a mystery out of simplicity. As a result the uninformed have been given a royal opportunity to exercise their imagination. And they have done it!

Public relations is a comparatively new activity for most business enterprises and involves a technique which too many have not yet learned. Obviously, the first place for each company to start is within its own organization. This is the "inside job" that builds a company's good name among its own family and lays the firm foundation for building public confidence and favor. As one exponent of the art phrases it: "Industry's public relations cannot be one thing and its private actions and policies something else. The two must be in complete accord."

The inside job should present no real difficulties to fair-minded employers. Most workers have a normal predisposition to view in a favorable light the organization in which they earn their livelihood. Most companies endeavor to conduct their operations so as to justify that favorable attitude. But too few of them are adept at dramatizing the facts that furnish a substantial basis for maintaining employee good will. So, where misunderstanding and suspicion born of ignorance exist, time may be required to break down the barriers that have grown up.

The task of telling this inside job to the outside world, however, will not be easy, for two reasons. First, it has been so long neglected that the backlog of misunderstanding is large. Second, public relations involves attitudes as well as actions, a viewpoint as well as an organization. Public relations is not a commodity that can be purchased like a car of coal or a bolt of silk; neither can it be sold by "canned" material. Each program to establish sound public relations must be individualized and indisputably stamped with the personality of the company promoting it. *And the deed must always back the word!*

But the task is worth the effort. For, with the inside job right, a properly conceived and intelligently executed public relations program offers business the means of successfully counteracting unjust public suspicion, unfair political attack and unwarranted outside dictation. The need is urgent.

A WAY

to achieve good will

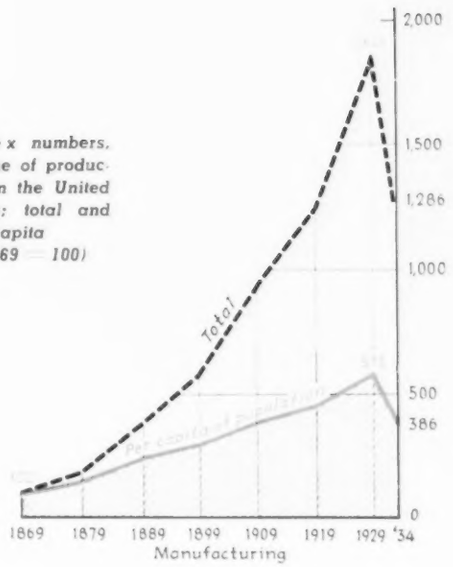

Index numbers, volume of production in the United States; total and per capita (1869 — 100)

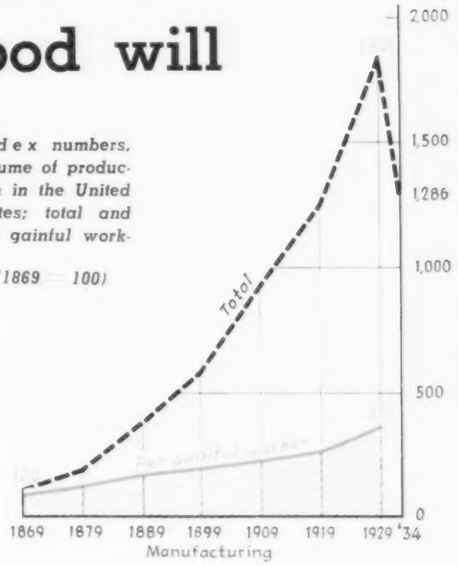

Index numbers, volume of production in the United States; total and per gainful worker (1869 — 100)

THE basic elements of public relations technique is a matter of maintaining a contented and effective organization and a good name. The problem resolves itself into an inside job and an outside job.

In the development of good industrial relations within the organization, certain steps are necessary. They may be set down as follows:

1. *Determine personnel policies.* A statement of the personnel policies of the company should be formulated. It should be submitted for endorsement and acceptance by representatives of the personnel, from top to bottom. It should be made known to all employees.

Policy statements should be definite on such matters as wages, working hours, overtime, promotions, layoffs, vacations, sickness, relief, safety, training and education, profit-sharing, collective bargaining.

2. *Improve personnel efficiency.* Strengthen the influences within the organization which insure the efficiency of the working force, the purpose being to advance the opportunity for the individual and the company, through lower production costs, better service to customers, and improvements in the quality of the product.

3. *Assure the well-being of the employees.* Provide safe and sanitary working conditions and plant services necessary for comfort. This means adequate ventilation, heating, illumination, the elimination of noise, and suitable provisions for rest, meal time, recreation.

The stabilizing of employment and the establishment of organized protection against unemployment, sickness, old age and death have far reaching influence upon both the physical and mental welfare of employees. So has assistance to deserving individuals in their problems of savings and housing.

4. *Train and educate.* A suitable program should be developed for advancing men and women in the organization. Educate them as to the aims of the company, its place in the national economy, the place into which each worker and executive fit; of the benefits of cooperative effort. Train them to assume the responsibilities of higher jobs, to earn more pay.

If good will prevails inside the organization, the most important step has been taken toward good public will toward the organization. The outside world, however, has an active interest in any company whether it deals with the public only locally, or on a national scale. The public will be interested to know the place

HOW
An Industry Grows

MANY times these days one hears that research and technical advances of all kinds should be prohibited: that we are far enough advanced technically; that further inventions will rob men of jobs. But is this the truth?

All of our present industrial age is based upon research, upon invention, upon discoveries, upon technical advance. If there had been no research and if invention had been prohibited, there would be no telephone, no radio, no movies, no telegraph, no wireless aids to safety at sea and in the air. There would be none of the newer uses of radio tubes in the factory to prevent accident, to increase productivity, to lower cost. These items represent only a few of the results of research and invention. One need but look about his own home to discover a much greater list of materials and things which would not exist were it not for somebody's research into chemistry, into electricity, into mechanics.

The great achievement of commercial research is to improve the productiveness of each worker, and, therefore, to improve his value to himself and to all other workers. In the long run, the purpose of industry and of factories is to produce wealth in terms of wages to employees and employers, in terms of real goods for all the people—radios, automobiles, clothing, medicine, food, books, houses, etc.—in terms of a money return on the capital invested in industry.

But before there are any jobs or any research there must capital be invested; the money for a factory or a laboratory must be spent, wages must be paid before there is any chance of a single dollar coming back to the owners in return for their investment.

The radio industry is an excellent example of how entire industries arise from research, from a discovery, from an invention, that may seem at first to have no practical value.

Many early men of science had a share in making possible communication without wires or other visible tangible link between sender and receiver. An American, Joseph Henry, played an important part in the beginnings of wireless systems. An Englishman, Maxwell, developed by pure reason and without any apparatus at all the electrical laws by which all radio is carried on today. This was pure research. The only sign of accomplishment was a series of mathematical equations which only a very few people can understand.

For many years these mathematical expressions had interest only for the theorist. Then a German, Hertz, decided to put them to the test. He made an experi-

Each year, several million radios from American factories go into American homes

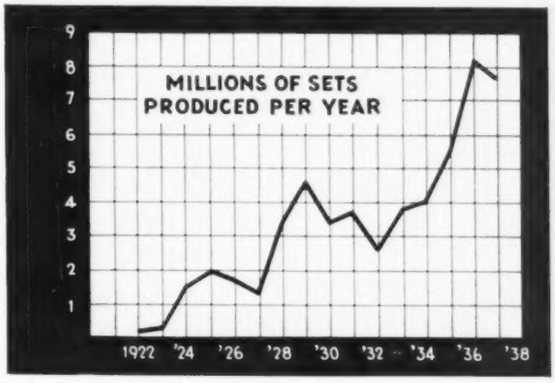

Who in 1922 would have thought 100 million radio tubes would be built each year?

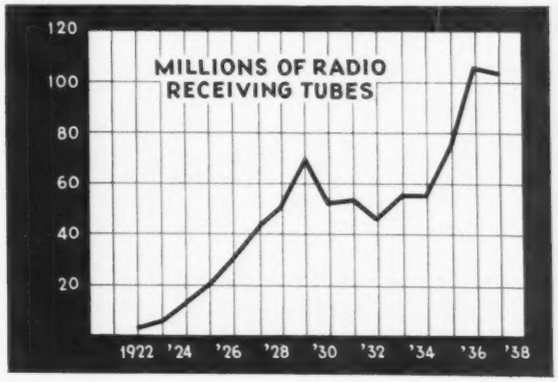

in the national or local economy which the company occupies.

For customers and prospects there are many interesting facts.

1. Manufacturers of materials and products which touch the lives of people only indirectly can show how their products raise the general standard of living.

2. Companies that sell their products directly to the people can interpret the resulting social and economic benefits in terms of human well being.

3. All types of companies can publicize interesting facts about themselves, their products, their policies.

4. Through local and national trade associations all types of business can join in promotional programs for the information and education of the public.

In the community where the company is located the company is judged by what people hear about the company. In promoting local good will, informed employees are an invaluable asset to the company that has done the "inside job."

1. Good will in the community is built by the publication of facts about a company, by making these facts available promptly, accurately, clearly and frankly through the media which exist in every community.

2. Community affairs can be shared by the company. By taking an active part in local activities, by becoming itself a good citizen and neighbor, a company makes itself known and liked.

Industry Cooperation. An industry as a whole is represented by its trade association. This representative should be able to act as clearing house for the exchange of the plans and experiences of individual companies in the work of industrial and public relations.

A part of the clearing-house job can be collection of industry-wide statistics and their distribution to member companies for immediate use. Through standardization programs, through promotion of good business practices, through self-regulation an industry can benefit much from active participation of all companies in the trade association. And as an industry benefits, its constituent companies benefit.

3. Local good will may be promoted by all local companies cooperating in a public relations campaign. Advertising in the local press is a most effective weapon with which to combat untruths told by those who have selfish and hidden aims or who merely lack proper information. The welfare of the community as a whole is bound up with the welfare of the industries of the community—but this fact is not self-evident. It must be brought home clearly, and truthfully, to the local people.

All of these steps are part of one program, starting from the inside and working outward. Such a program calls for a lot of work and thought. It is no job for an amateur. In most cases, some outside aid will be needed. If the executives of a company are solidly behind such a plan and if the services of a competent consultant in public relations are secured, both the inside and the outside job of improving public relations can be accomplished.

RESEARCH MAKES JOBS

One of the aims of management should be to educate employees on subjects about which there is doubt or actual misinformation.

One of these subjects is that of the effect of research and technical advance upon employment. Many people seem to think that all research should be stopped, that invention be outlawed. There is no doubt that technical advancement causes shifts and actual displacements of some jobs, but so far history shows that the total number of jobs in industry has increased faster than the population of the country has increased.

In the following pages *Electronics* presents data of the kind which, we believe, are useful in showing employees the true facts in the question of research versus employment. Although the data apply only to the industries closely associated with the electron tube, similar data can be obtained for other industries based upon research, discovery, invention.

Future articles will deal in similar fashion with other questions that crop up in the minds of all of us, questions which are most easily answered by facts. Such questions concern the source of money entering a plant, where it goes, the relation between the employees share of this money and that earned for the owners: the respective roles played by employer, employee, stockholders, and the consumer.

that made possible modern radio broadcasting.

A piece of pure research by O. W. Richardson, an Englishman, carried out before DeForest's discovery has made it possible to understand the laws by which the radio tube works, work by eminent scientists such as Langmuir, and others has showed how to make the tube have long life, how to make it cheaply, how to operate it efficiently, how to expand its uses. Remember that the first radio tubes sold for $6 and higher, that they had short lives, that they would only operate from batteries, that they were vastly inferior to tubes now purchased for less than a dollar.

Another experimenter, Frank Conrad of the Westinghouse company, provided the final link leading to broadcasting. He discovered that people would listen to wireless telephone programs he put on the air experimentally; he found they would even pay money for apparatus by which to listen to these "broadcasts." He showed that wireless, now called radio, had a meaning for every man, woman, and child, for every home, for every factory worker, for every office worker. Broadcasting was born.

All of this took years and labor and dollars. From obscure research, from new discoveries, from inventions, has come an industry based entirely upon technical and scientific facts, an industry that annually employs a hundred thousand workers—not counting those thousands whose jobs are only indirectly associated with radio—that has placed radios in 27 million American homes, 85 million homes throughout the world, that has promoted safety at sea and on land.

But this is not all that has come from research in our own industry. While Marconi and Edison and DeForest and Conrad were laying the groundwork for the radio industry other research was taking place. A group of mathematical equations by a German scientist of world renown, Einstein, disclosed the facts about the photoelectric tube, the "electric eye" that now protects arms from injury in punch presses, and performs innumerable other factory services. And one must not forget that the photoelectric tube is the heart of sound motion pictures providing annual jobs to thousands of people and entertainment and relaxation and education for millions.

Broadcasting and sound movies and the application of the radio tube in the factory are all less than twenty-five years old. Who, twenty-five years ago would have dreamed of the present vastness of the radio industry, of the wealth existing in 27 million receivers, of the hundreds of thousands of man-hours of labor that went into those radio receivers, or of the millions of dollars of wages that paid for these man hours of work? Who can imagine now, what the next twenty years will bring?

Is there any truth to the statement that research should be stopped, that invention be prohibited?

Nearly 30 million American homes enjoy radio entertainment and education

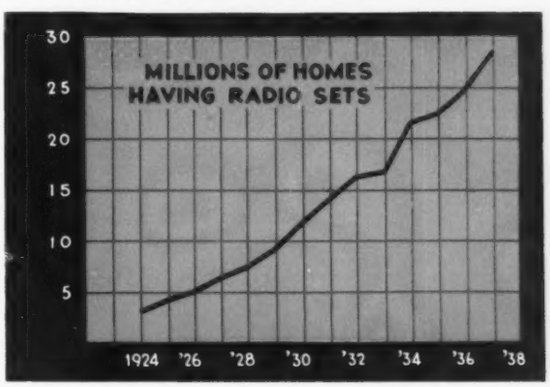

Of all the homes in United States more than 80% are radio equipped

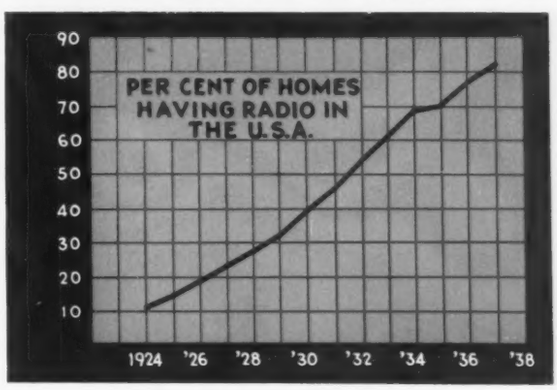

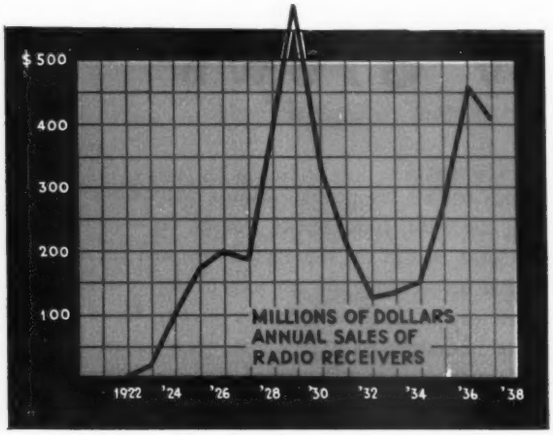

From nothing in 1922 to 400 million dollars in 1937 — such is radio's 15-year growth

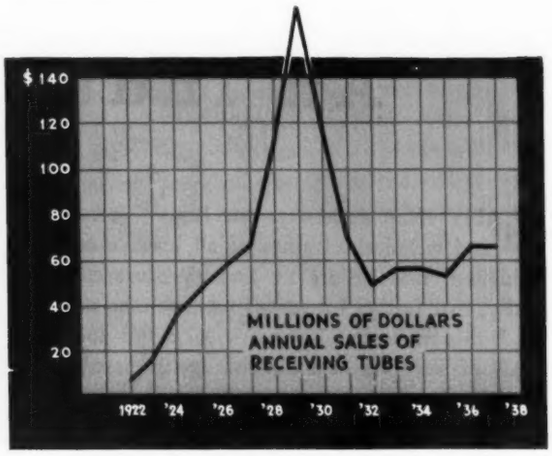

Even in dollars the annual production of radio tubes makes an appreciable figure

ment with actual apparatus and proved that Maxwell's brain child had physical meaning. Hertz proved that a sender and a receiver could be connected together by invisible links for the transmission of intelligence.

And still no one saw the practical application.

Several years later, Marconi, an Italian, said to himself "why can't we put to work Maxwell's equations, Hertz's experiments?"

And so ships at sea were enabled to communicate with land, and with each other at first only over very short distances, but now, through the effects of more research and more invention, vessels going around the world can keep in continuous touch with their home ports. The humanitarian value of wireless was brought home forcefully in its early days by the tragic loss of the "Titanic." The passengers who finally got ashore were saved solely through the ability of the captain of the "Titanic" to summon other ships to the rescue.

Marconi provided the practical touch; he saw that a use could be made of the scientific work of his predecessors. He made it possible for ships at sea, and later for airplanes and motor cars to communicate with each other or with stations in fixed positions on land. There were no jobs until Marconi came along; but research came first.

Even before Marconi's practical touch provided jobs, other lines of research were going on; research which at the moment seemed to have no practical value, but which later fitted into the picture started by Marconi very well. An American made a discovery that has provided many jobs and created much physical wealth.

Edison discovered that incandescent lamps got black inside the bulb. In an effort to determine why this was so, he made a most important discovery—that a current would flow from the hot filament to a metal plate sealed inside the bulb, even though there was no internal metallic connection between the two elements. Furthermore the current would only flow in one direction, from the filament to the plate, and not in the reverse direction.

This discovery has come to be known as the Edison effect. But its discoverer was not interested. It was not an important link in the research he was carrying on.

Not for twenty years did anyone see the practical value of Edison's discovery. Then an Englishman, Fleming, saw that it would increase the ability of ships at sea to receive messages over longer distances. He made a wireless detector out of the Edison effect. He supplied the practical touch.

A few years later another American, DeForest, made another important discovery, one which turned the Edison effect and Fleming's valve into the modern radio tube. DeForest found that the addition of one more metallic plate inside the bulb made the Fleming detector vastly more sensitive.

DeForest's tube and more research made radio telephony possible; provided, finally, the practical touch

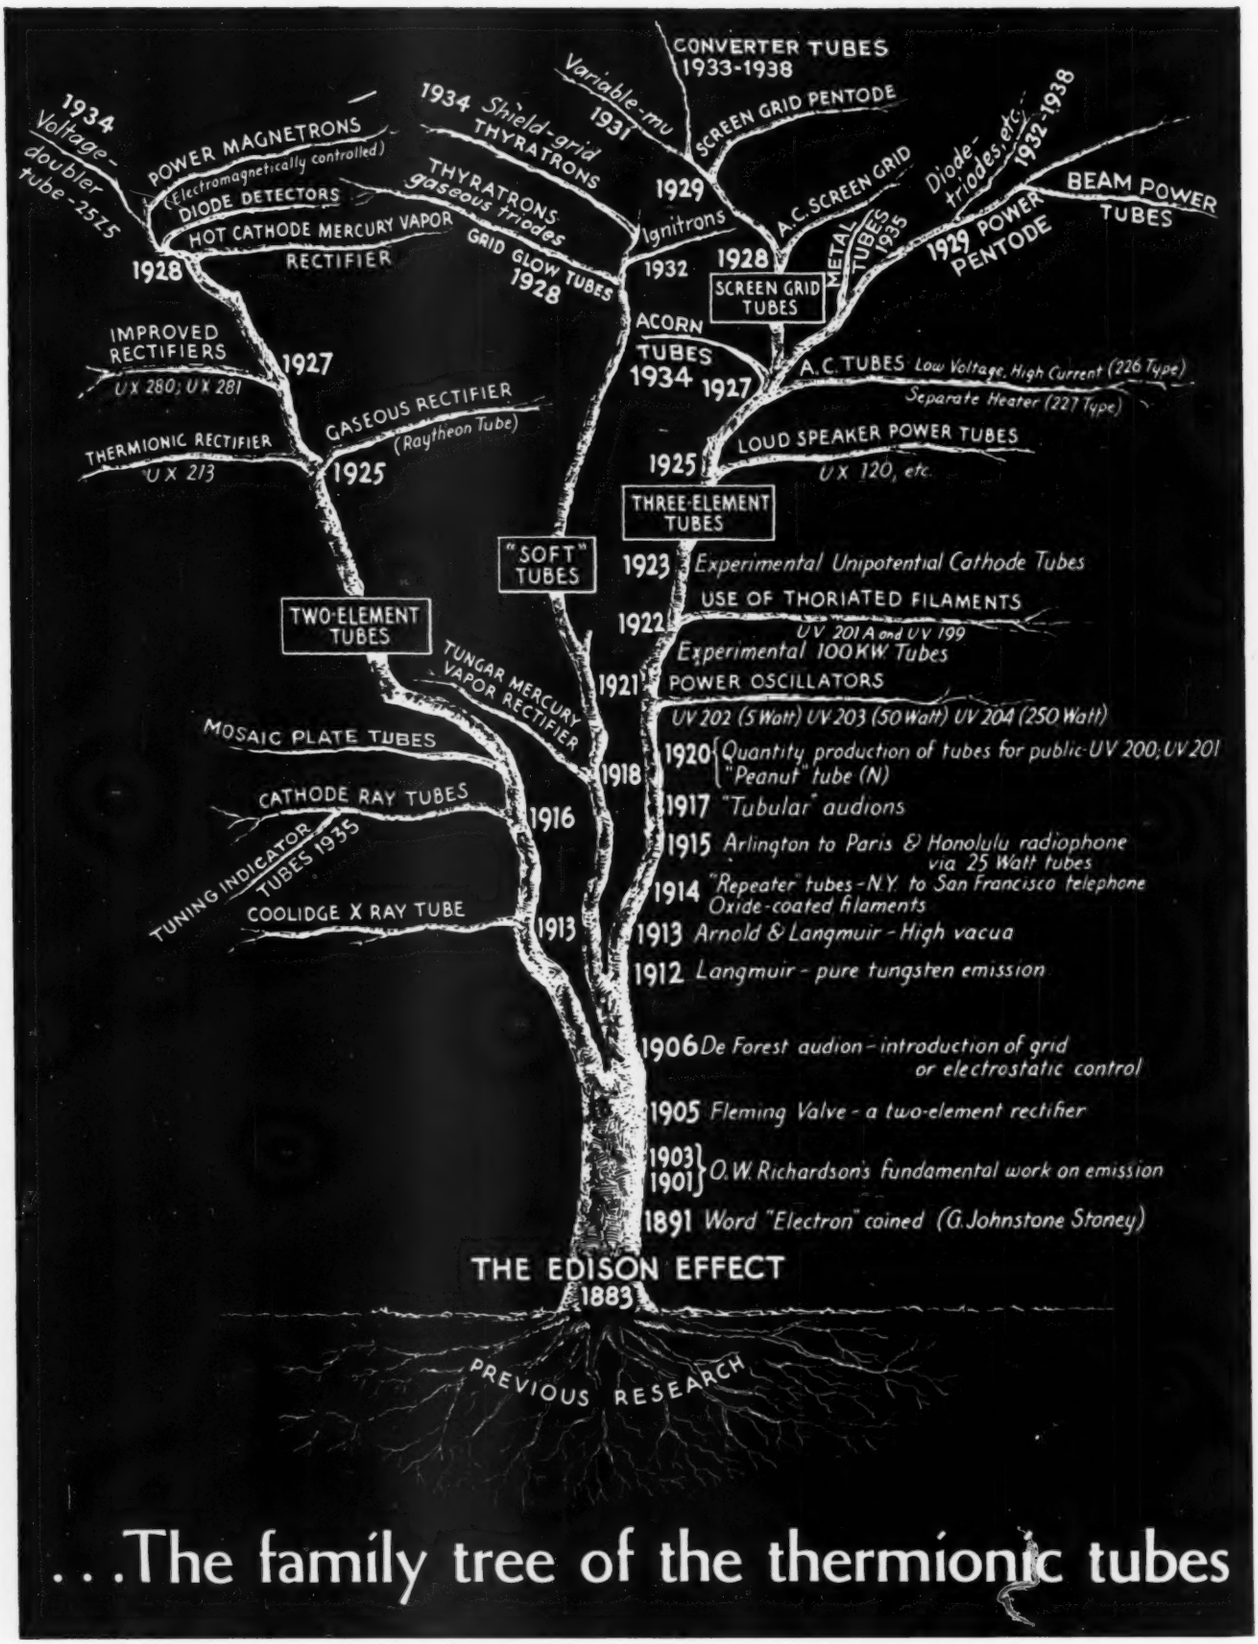

★ ***From the early work of Edison and previous research men, many types of vacuum or thermionic tubes have come. The words on this chart describing these new devices may sound like Greek to the uninitiated reader, but each new tube has proved to be of vast technical importance. Whole new systems of communication have been based upon them. There is no end in sight to the production of still further tools of this sort—provided the research laboratories keep going. Similarly, there is no end in sight to the new uses for the tubes already produced.***

WHO

Makes an Industry

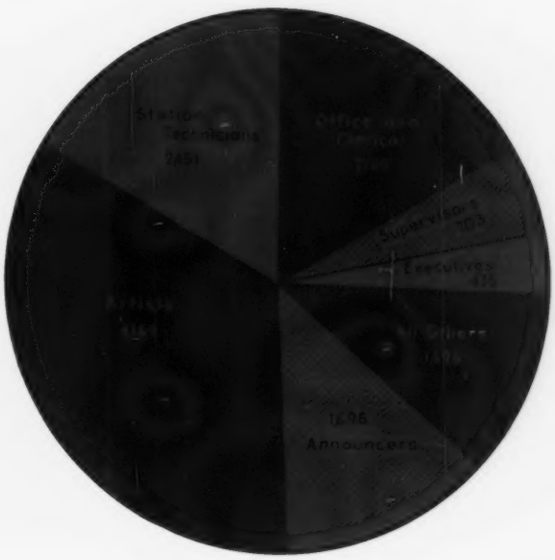

IT TAKES all kinds of people to make a world—or an industry. A business built upon technical knowledge needs all kinds of people. There are executives, clerks, engineers, salesmen, factory workers, watchmen, lawyers; men and women. Each plays an important part in the entire process of design, manufacturing, distribution. A factory cannot operate without engineers and the engineers don't hold their jobs long unless the factory produces goods which the salesmen can sell. The executives' job is to knit all this work together into a unit, and to fit this unit successfully into the nation's business.

The charts shown above are only two examples of recent data concerned with the radio industry. One chart shows the kinds of factory people, and the number, who were employed in 59 plants making radio parts, tubes and sets and employing 28,555 people in August 1937. The data are from the *Monthly Labor Review*, August 1938. About twice this many people were at work in the entire industry. In addition to these workers must be added the technical men and women, the engineers, the research people, the executives, the salesmen, the clerks, and the vast number of radio service men who derive their livelihood from putting back into operation the nation's receivers which get out of whack.

The other chart shows the type of employee working in the broadcast stations and the studios in this country as of the week of October 26, 1935. The data were taken from the "Census of Business," 1935, published by the United States Chamber of Commerce. At this time there were 557 stations in operation; the weekly payroll amounted to $429,401. The data do not include entertainers supplied by advertisers, nor those who maintained the network of wires that connected the stations together. The total number of employees accounted for by this chart add up to 13,139.

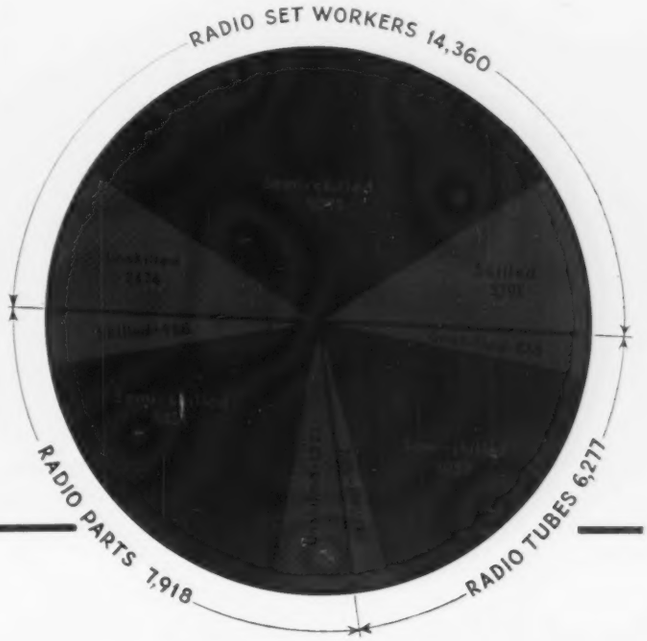

WHAT

RESEARCH DOES

WHAT is research?

"Research," according to Charles F. Kettering, director of General Motors research laboratories writing in the *Saturday Evening Post,* September 10, 1938, "is a state of mind—a friendly, welcoming attitude toward change. Going out to look for change instead of waiting for it to come. Research for practical men, is an effort to do things better and not to be caught asleep at the switch. It is the problem-solving mind as contrasted with the let-well-enough alone mind. It is the 'tomorrow' mind instead of the 'yesterday' mind."

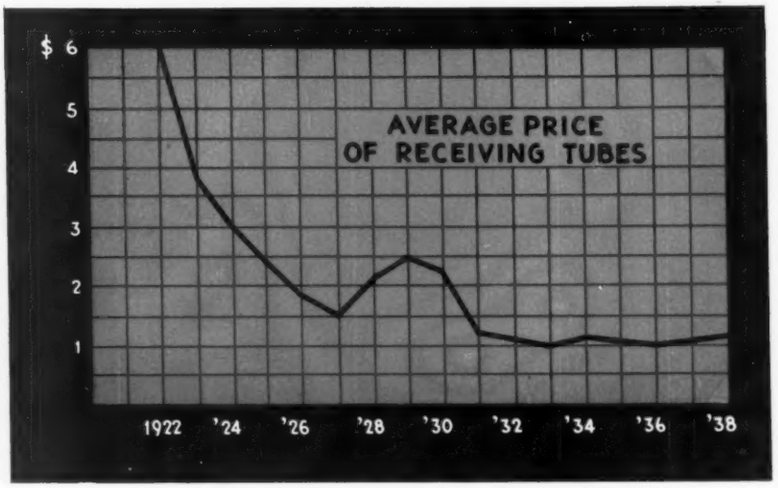

What can be done with research?

The answers to many problems can be found by research. The first step in turning research loose on a problem is to define the problem. Is it to find a new product to build in a factory, a product that people will buy? Is it to find ways of lowering the price of a product so that more people can afford to buy it than can afford to buy it at the higher price? Is it to find a better, although not necessarily cheaper, way to do something so that better performance gives the buyer more for his money? Is the problem to determine how to make a given amount of raw materials go further; or how to reclaim raw materials from discarded automobiles, clothes, newspapers, ashes, or other waste products?

RESEARCH LOWERS PRICES

Research can find out all kinds of things—but the fellow who starts a piece of research must not be afraid of the answer. Perhaps what he started out to find can not be secured in the way he tried. There are other methods of approach so that seldom, indeed, is "no" a final answer to any line of research today.

Let us follow through only one or two of the things research does.

One need only look at the radio receiving industry to see how engineering and research has brought down prices until, today, you can buy a better radio for twenty-five dollars than you could buy at any price only a few years ago.

Let us look at the prices of radio receivers and the number produced in the early years of the radio industry. In the very early years nearly all the receivers were built by hand at home, in the kitchen at night, in the basement. Factory production barely got started during the first three or four years after KDKA began broadcasting. Prices of receivers were high, life of tubes was short, use of headphones was necessary. Better receivers were required. More tubes per set, more complex circuits was the answer. The average price of the receiver rose—but the user got more for his money. He could now hear programs free from interference; he could fill a room with

music; he could discard the outmoded headphone.

In 1926 new tubes arrived which made it possible to run a radio from house lighting current instead of storage batteries. Immediately the annual production of receivers jumped. In 1927 these a-c receivers really got under way; and the next year the total number of sets built and sold doubled over that of the previous year. The price, however, was about the same. Research, in this case, had not lowered the price; it had improved the product. The owner got more for his money.

Then came the depression. People had less to spend; they could not afford so much for a radio. What were the manufacturers to do? Here was a job for research—for the open mind, one looking for and knowing how to handle, change. If people had less money to spend, and if factories and capital invested were not to be idle, prices must be brought down.

It is instructive to note that the annual production of receivers since 1929 has remained above the three million mark every year in spite of the fact that the purchasing power of the people has been consistently low. How was this done? By lowering the unit prices of receivers so that this decreased purchasing power continually got more for its money. No one would have thought, in 1922, or in 1929, or in 1935 that radio sets so cheap as $25 would be so full of value as the many thousands of this price being made today.

There was a time when a radio-phonograph cost a good $300 and weighed as much as two men could carry. Today radio-phonographs can be had for as little as $20; they are small enough to go on top of a very small table; and they are easily portable. What is more, present-day radio-phonograph combinations are superior to the $300 units of only a few years ago.

While more radio was being offered for less money, research was going on in the tube factories. Radios, in fact, are but tubes plus accessory apparatus. If the price of radio tubes could be brought down, the price of a radio with tubes could be brought down. Or, if fewer tubes could be made to do the work of more tubes, the receiver could be sold for less money.

When the first radios were made, each tube cost the user as much as $6.00. Imagine a 7-tube radio costing as much as $42 just for tubes! Average tube prices came down every year until 1928 and 1929 when they went up slightly. But in these years new types of tube came into existence, as the result of research. These tubes were more complex to build than those used up to that time. But they were more useful; they delivered more output, they improved the operation of radio receivers. They cost more to make; they cost more to buy. The purchaser, however, got more for his money than he had before. Here was another case where research did not lower price, immediately, but improved the product.

All through the depression, research went on in the plants of the tube makers. When, in 1932, purchasing power was such that people could not afford to pay a hundred dollars for a radio, the tube makers found ways of making one tube do the work of two and often three tubes. This lowered costs of radio sets greatly, so that in 1933 the average price paid for a set went as low as $34. Since that time the prices of radio receivers has not varied much from $50.

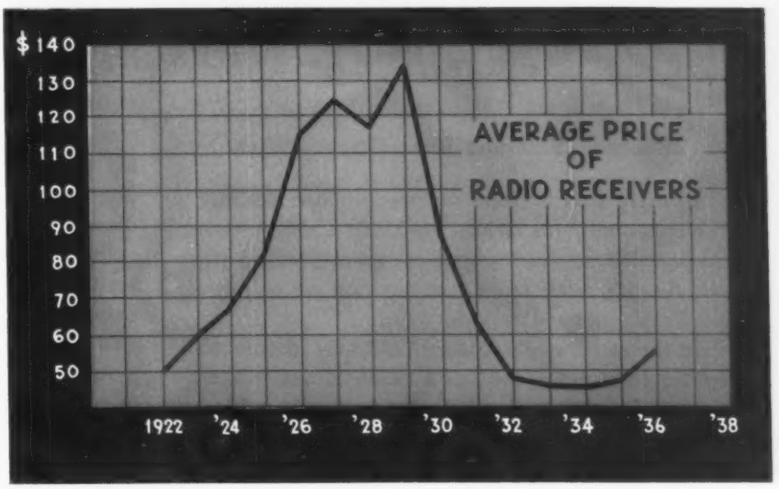

Research Improves Performance and Lowers Price

This table shows, in technical language, how tubes used in transmitting stations have improved since 1921. In the first place the power obtainable from such tubes has increased. Secondly the efficiency has improved, due to new methods found for operating the tubes. The price has decreased. And finally, the worth of the tube (final columns) has increased due to improved performance and lowered cost, taking effect at the same time.

1921					1938				
Tube Type	Power Output Watts	Plate Efficiency	Price	Watts Per Dollar	Tube Type	Power Output Watts	Plate Efficiency	Price	Watts Per Dollar
UV-202	5	50.0%	$8.00	0.625	809	55	73.5%	$2.50	22.0
UV-203	50	50.0%	$30.00	1.67	805	215	69.0%	$13.50	15.9
UV-204	250	50.0%	$110.00	0.44	833	1,000	80.0%	$85.00	11.8
UV-216	20	.....	$7.50	3.75	866	550	.....	$1.50	366
UV-217	150	.....	$26.00	5.77	872	3,000	.....	$14.00	214

If receivers still cost, on the average, more than $100, if headsets were still needed rather than loud speakers, if interference and "squeals" were as common as 15 years ago, if every tube you bought cost $6.00, and the best of these tubes was greatly inferior to the dollar product of to-day, do you think that 27 million homes would have radio sets; that 4 to 6 million new sets would be built and sold every year; that 6 million automobile receivers would be in operation. Research, more than anything else is responsible for these vast changes which have taken place. Do you believe research should be stopped?

Research Provides New Opportunities

In every field of endeavor, research has increased the opportunity for men to work, for capital to earn its pay. Better, cheaper, quicker communication; better, cheaper, safer, faster transportation are only two results of continued research.

In the many ideas, products, and jobs contributed by the radio tube, one has a beautiful example of the benefits of research. At first the tube was only an aid of communication. Then it made talking motion pictures possible. Then it improved, immeasurably, the art of recording the human voice or music so that the great artists can be heard in every home.

Books are recorded so the blind may hear, at home, entire volumes of the world's literature.

These are very natural applications of the use of the radio tube. But it is in the extension of the use of the radio tube to industry as a whole that a most remarkable proof of the benefits of research is displayed. Opening doors without human touch; safeguarding a punch press so that the operator's hands are completely protected against injury are but two of the spectacular uses of the electric eye in industrial use.

The radio tube, and its ally the electric eye, are controlling all sorts of processes in the factory now, increasing the output of the factory's workers, improving the product, counting, sorting, metering, calipering, doing, in addition, many dirty jobs that are but drudgery for humans.

In medicine the tube is an important tool. X-rays are generated in a tube, not too unlike the radio tube; certain illnesses are now corrected by local fevers created by the tubes such as are used in transmitters.

All of these are applications of but a single product of research, the radio tube and other members of its family. Shall we stop further research—or shall we look forward to other new products, other new industries, other new jobs?

It SCORES on every play!

THE 22 TYPE PORTABLE SPEECH INPUT

From kick-off to final whistle, this Western Electric equipment scores with operators and listeners. It's easily handled, rugged, designed for fast set-up — and it gives high fidelity that your listeners have a right to expect.

Both 22B and 22C equipments operate from AC supply or batteries — give you 4 mike mixers and main gain control. They're ideal for football pick-ups, political rallies, remotes of every kind.

Ask Graybar for all the facts on this high quality low cost equipment.

Outstanding Features:

1. **Stabilized Feedback assures high fidelity.**
2. **Frequency characteristic flat within ±1db. from 30 to 10,000 cycles.**
3. **Maximum gain of amplifier approx. 92 db.**
4. **Maximum of control and flexibility through use of parallel mixing circuits for 4 mikes plus master gain control.**
5. **Operates from 115 volt 50/60 cycle AC supply or batteries.**
6. **Completely factory-wired and tested.**

Distributors: Graybar Electric Co., Graybar Bldg., New York.
In Canada and Newfoundland: Northern Electric Co., Ltd.
In other countries: International Standard Electric Corp.

Western Electric

Distributed by Graybar

RADIO TELEPHONE BROADCASTING EQUIPMENT

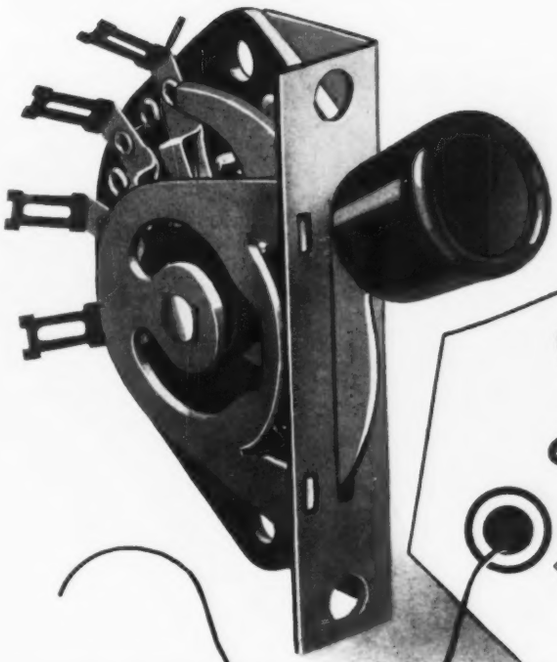

CENTRALAB *Low Capacity* LEVER ACTION SWITCH

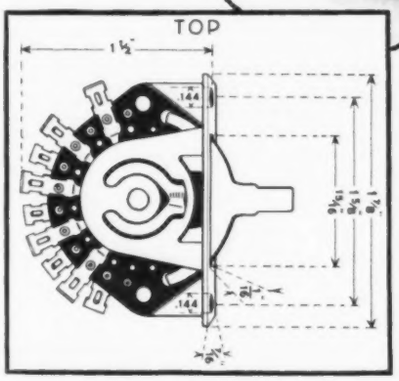

A space-saving lever action switch that can be furnished singly or assembled to an attractive mounting plate with any required number of switches in a group. Each switch will take up to 12 contacts that can be used in countless shorting or non-shorting switching sequences. Contacts are of the long lived double wipe type.

Centralab Lever Action Switches are furnished with either two or three positions. Index action can be positive in all positions, or spring return to center from either side.

for:

- **BROADCASTING** In control panels for commercial and amateur transmitters.
- **RADIO RECEIVING** Band changing, I.F. selectivity, sensitivity, tone, and similar controls.
- **PUBLIC ADDRESS** Centralized sound, inter-communicator, call systems.
- **TEST INSTRUMENTS** Signal generators, analyzers, tube testers, multi-meters.
- **INDUSTRIAL USE** Electronic apparatus, signalling devices, business machines.

. . . and any other application where multiple contact, low capacity switches are required to operate at low voltages and currents.

ENGINEERS: *Send for specification sheet number 628 for further electrical and mechanical details.*



Centralab

CENTRAL RADIO LABORATORIES

DIVISION OF GLOBE UNION INC., MILWAUKEE, WISCONSIN

must be DEPENDABLE

Every user of a relay points to his application as the one place where dependability is paramount. The fact is, a relay is a control device and therefore the functioning of the entire equipment with which it is used, depends upon the relay. Ward Leonard recognizes the responsibility placed upon relays today and produces both relays and relay control assemblies that are the utmost in dependability, positive function and long life. Send for bulletins of interest.

BULLETIN 81
Intermediate duty
BULLETIN 106
Light duty
BULLETIN 131
Heavy duty

BULLETIN 251
Sensitive type
BULLETIN 351
Thermal time delay
BULLETIN 362
Motor driven time delay

WARD LEONARD

Electric Control (WL) Devices Since 1892.

WARD LEONARD ELECTRIC COMPANY, 32 South Street, Mount Vernon, N. Y.

Please send me relay bulletins.....

Name .....

Firm .....

Address .....

City..... State.....

Tubes At Work

[*continued from page* 34]

filled with gas and provided with small glass extensions. No electrodes or other electrical connections are employed. The tubes are placed against the sign, or against any other surface, in which is mounted the radio frequency power supply. The r-f oscillator unit can be supplied in several sizes from 50 to 350 watts depending upon the size and number of letters in the sign. The power supply is connected to energizing strips which are embedded in the surface of the sign behind the luminous tubes. These strips are metallic conductors, encased in glass, which radiate the energy directly to the gas contained within the letters.

Such a system permits changing letters from day to day (the ordinary neon sign is a permanent, or at best semi-permanent affair). Among the technical advantages are the absence of high voltage, and the consequent freedom from difficulty due to poor insulation, leakage, electrode sputtering and punctures of the glass tubing.

In a comparison between the relative power requirements of a marquee sign for a motion picture theatre, it is claimed that the conventional silhouette letter with incandescent lighting requires approximately 16 kw. for three rows of letters on three sides of the marquee. The new type of luminous interchangeable letters will occupy the same space with a consumption of approximately 3 kw.

PROJECTION TELEVISION IN THE HOME

This German vision receiver, exhibited at the Berlin Radio Show which opened last month, employs a small cathode-ray tube and high accelerating voltage, producing a picture which is projected on a screen at the top of the cabinet, and viewed in the mirror as shown

SUPERIOR TUBING

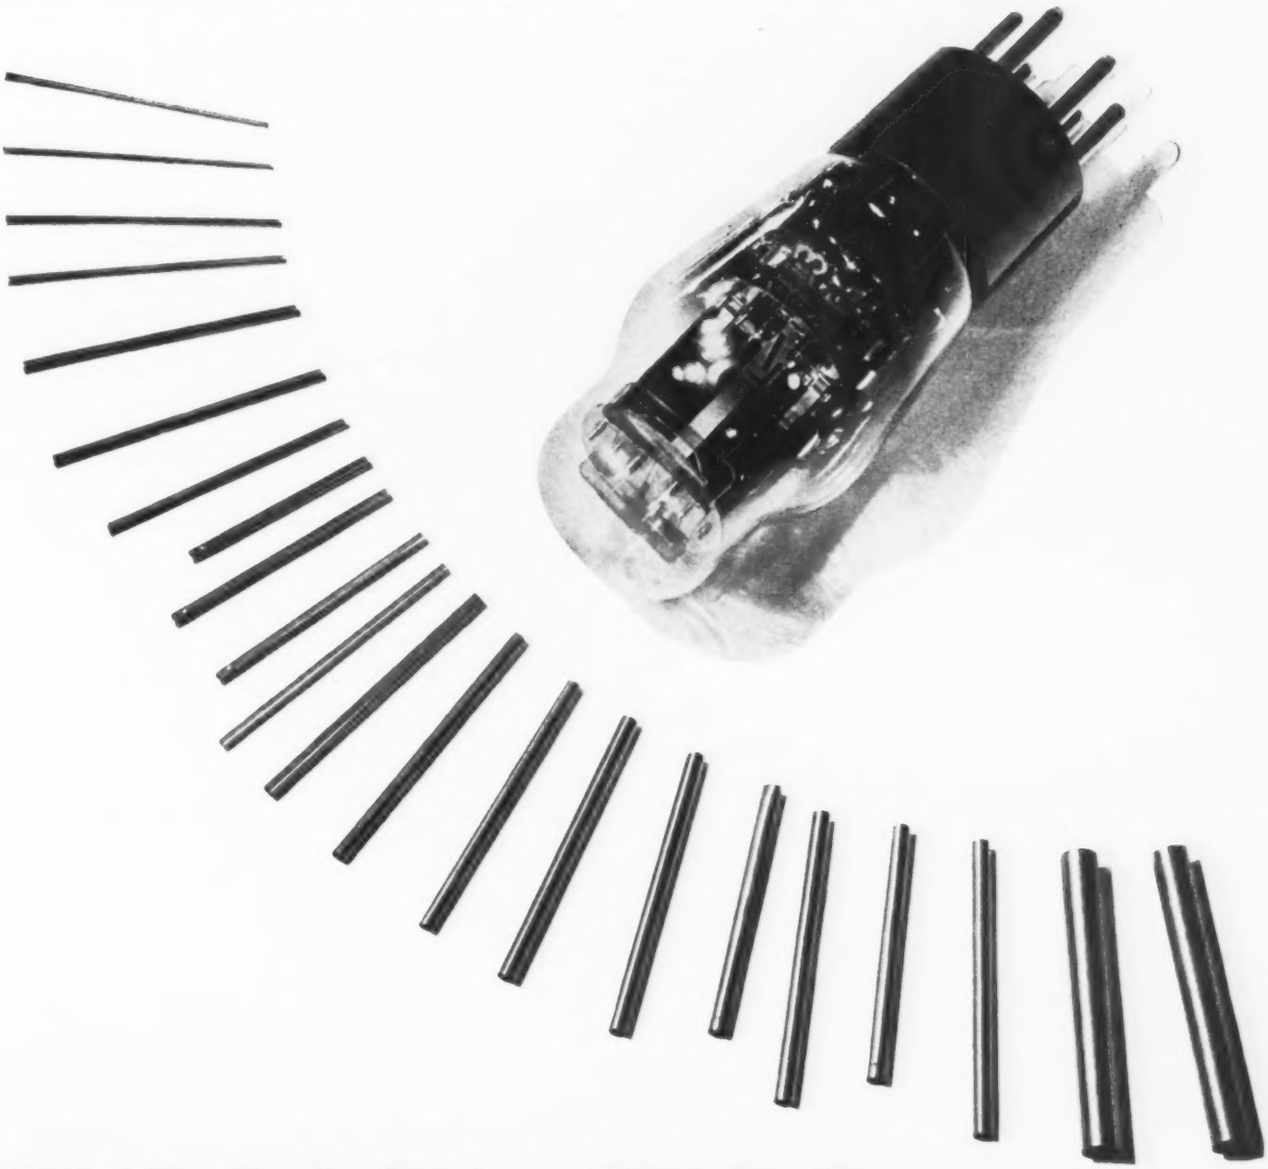

We Like To Do Business With People Who Like To Do Business With Us

Many an original order has been secured on the basis of "friendship." But to develop that business into a friendly and mutually profitable relationship takes a lot more than personality. This is especially true in dealing with technical men, on whom back-slapping and hand-shaking has little effect. Their interest concerns exact specifications, on-time deliveries and complete confidence in their source of supply. Customers who demand these qualifications like to do business with us and we, in turn, like to do business with them. (Repeat orders accounted for 80% of our last month's volume.)

SUPERIOR TUBE COMPANY
NORRISTOWN, PENNSYLVANIA

25 MILES FROM PHILADELPHIA — 100 MILES FROM NEW YORK

Makers of Fine Small Seamless Tubing in various metals and alloys and Lockseam Cathode Sleeves under U. S. Patents.

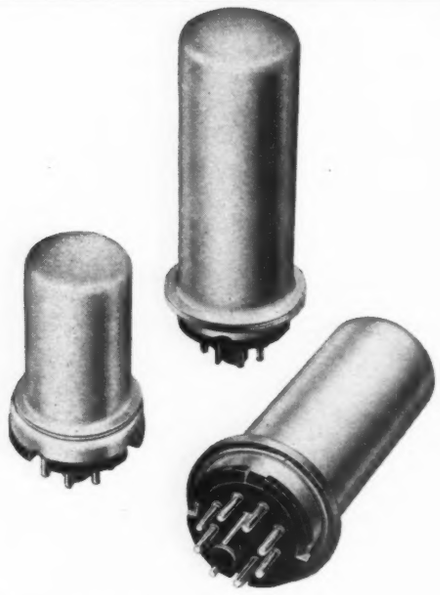

Something New in

TRANSFORMERS FOR AIR-CRAFT RADIO

THE Inert-Gas-Filled Audio Transformer is AmerTran's latest contribution to air-craft radio. These units are so designed and constructed as to perform long and successfully under the most adverse conditions of humidity, ambient temperature and altitude. Further, they represent the ultimate in both compactness and light weight. And, all these features are obtained without sacrifice of satisfactory electrical characteristics.

This new AmerTran product is made permanently dry (non-hygroscopic), so that no chemical action can ever take place. Each unit is first completely evacuated of air, then filled with an inert gas under normal atmospheric pressure, and finally hermetically sealed with glass. There is no compound filling to add weight and ooze out at high ambient temperatures. It is built like a metal tube—even to the octal base which facilitates installation. May we send data on equipment for your requirements?

AMERICAN TRANSFORMER CO.

178 Emmet St., Newark, N. J.

AMERTRAN

AMERTRAN ELECTRONIC PRODUCTS



AUDIO FREQUENCY COMPONENTS



AIR INSULATED RECTIFIER COMPONENTS

MANUALLY OPERATED VOLTAGE REGULATORS

LINE EQUALIZERS



OIL IMMERSED TRANSFORMERS

RECTIFIERS



AUTOMATIC VOLTAGE REGULATORS

Simple Phonograph Oscillator

By H. C. KIEHNE

MANY PEOPLE who own radio receivers would like to use a phonograph with them; but they hesitate to encourage a service engineer to take the receiver away for the necessary wiring, etc. It is also true that certain radio receivers equipped with phono outlets in the back



Fig. 1—Basic circuit of phonograph oscillator

of the chassis are not so equipped for naximum convenience and that the service man must be called in to make the proper connection.

The circuits shown here represent a simple negative conductance oscillator which may be modulated by the phonograph pick-up and which may then be demodulated, amplified and reproduced by the receiver. Compensation is provided for the fact that lower frequencies are not recorded to full amplitude.

Figure 1 gives the circuit diagram. Figure 2 shows the use of the circuit on an A.C.-D.C. basis. A 6J7 or a

CHECKING GRID STARS

A phototube speed timer has been used by the coaches of the Villanova College football team to check the reaction times and running ability of the players, as well as the speed of passes and kicks

Lenz RF HOOK-UP WIRE *

MEETS *EVERY* CONDITION

Especially recommended for AVC circuits, All Wave Switching Systems and all parts of a radio circuit requiring hook up wire of exceptionally high dielectric characteristics, where it offers an unparalleled degree of stability and dependable service. We will gladly comply with your request for samples.

* *Now Protected Under U.S. Patent No. 2120306*

LENZ ELECTRIC MANUFACTURING CO.
1751 North Western Ave., Chicago, Ill., U.S.A.
"IN BUSINESS SINCE 1904"

New ⅓ watt, Uninsulated
SPEER RESISTOR
MIDGET TYPE
5/32" x ⅜", Co-axial Leads
What a
SPACE
SAVER!
NEW ⅓ WATT MIDGET TYPE
SPEER RESISTOR
Not merely compact, this newest number of the Speer Resistor family has co-axial leads and great mechanical strength, is smooth and uniform. Its characteristics can be controlled to meet the most rigid specifications. It is available in values from 1 ohm to 15 megohms. Higher resistance values may be had on special order.
Leading radio equipment manufacturers use millions of plain and insulated Speer Resistors annually. The line is complete, production facilities insure a dependable supply and uniform quality second to none. Write for samples of the space-saving new ⅓ watt Speer Resistor (Midget Type) and any others that interest you, together with Bulletin No. 90-R.
SPEER CARBON CO.
ST. MARYS, PENNA.
CHICAGO
CLEVELAND
DETROIT
SCC
MILWAUKEE
NEW YORK
PITTSBURGH
½ watt, Insulated
Carbon, all resistances
Wire-wound, up to 600 ohms
1 watt, Insulated
Carbon, all resistances
Wire-wound, up to 1500 ohms
1/10 watt
"Magic Eye" Resistor
⅛" x ⅜"
⅓ watt
Carbon,
Uninsulated
1 watt
All Resistances
¼" x 1¾"
2 and 3 watt, ⅜" x 2"
Elbow Type Suppressor
Spark Plug Suppressor
Double Screw End Suppressor
Distributor Suppressor
8640

6C6 work satisfactorily. It is not necessary to describe how the negative conductance oscillator works as this was done in *QST* in detail some time ago.



Fig. 2—A-c d-c version of circuit

It is important to filter the plus B lead well. An i-f transformer with good (if possible) critical coupling will alloy the signals to be received at about 540-560 kc by turning the trimmer to the proper value. The signal is tuned into the receiver in the usual manner. The oscillator may be used in a room adjacent to the receiver by employing a small antenna. A lot of fun may be had with the unit by attaching a microphone with a high gain transformer. By using proper coils, the oscillator will go down to about 12 Mc.

Midland Television Installs 441-Line Television Equipment

ACCORDING to a recent release received from Station KMBC in Kansas City, the engineering staff of Midland Television, associated with that station, have recently completed the construction of a 441-line television system. The equipment, claimed to be the only high definition television system in the Middle West, includes a camera, video channels and monitor facilities. All of the equipment was designed and manufactured under the direction of J. R. Duncan, chief television engineer.

R-F HEATS RIVET FOR RCA AT WORLD'S FAIR

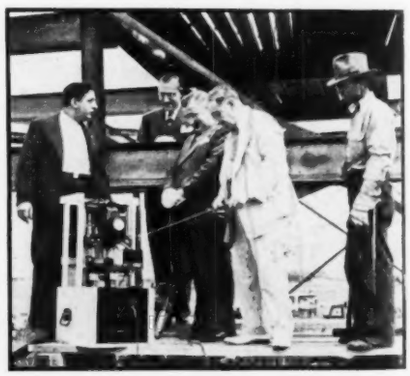

A portable transmitter, with an induction heating coil attached in place of the antenna, was used to heat the last rivet in the steel work of the RCA Exhibit Building at the New York World's Fair Grounds. The rivet, suspended in the induction coil, became white hot in less than a minute

HERE'S WHY

You Get the Advantages of Shure "Uniplex" Directivity at Lower Cost!

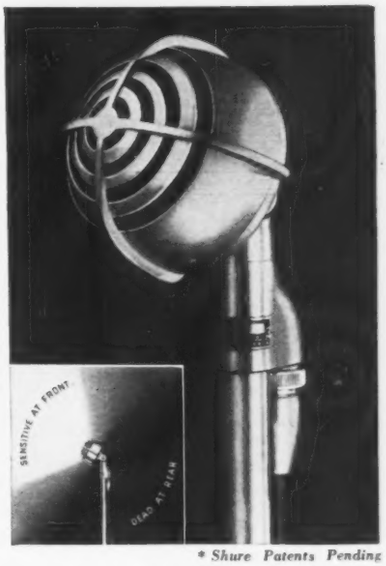

* Shure Patents Pending

New "Uniphase" Uni-Directional Principle

1. Previously all uni-directional microphones employed the "Two-Unit Bucking" system requiring two precision-matched elements for true uni-directivity over a wide frequency range. Precision matching is difficult and expensive to attain in practice—involves higher costs.



2. Discovery of the amazing new "Uni-Phase" principle by Shure Engineers made possible the simplified "Uniplex" uni-directional microphone. It employs only *one* microphone element—achieves *true uni-directivity* through action of acoustic network N. *No other microphone employs this system!**

"Uniplex" Solves Tough Pick-up Problems



3. The Shure "Uniplex" is the only true uni-directional microphone at such low cost. Provides excellent high quality response from 30 to 10,000 cycles at the *front*, yet is "dead" at the rear! (Rear response down 15 db, average, over a wide frequency range.)



4. Shure "Uniplex" uni-directivity solves tough pickup problems—gives you performance impossible with ordinary microphones. Eliminates feedback, audience and background noise, reduces reverberation energy pickup 66%. May be tilted for non-directional horizontal characteristics. The "Uniplex" does most every sound pickup job *better.*

Model 730A. Shure "Uniplex" Crystal Microphone, complete with 25 ft. cable with plug attached $29.50

Write today for technical information and data.

Shure TRI-POLAR

This versatile professional-type crystal microphone provides Uni-Directional, Bi-Directional, and Non-Directional pickup in one unit, each instantly available through built-in selector switch. Laboratory-tested performance. Smooth "ultra" wide-range response, 30 to 10,000 cycles.

Model 720B. "Tri-Polar." List Price, with 25 ft. cable and plug..... $45

Shure ROCKET with BAFFLE

A semi-directional crystal microphone with performance matching its striking streamlined beauty. "Ultra" wide-range response. A91A Baffle increases high frequency discrimination against sound from sides and rear. Model 705A "Rocket." List Price, with 25 ft. cable and plug.. $25

(A91A Baffle, $2.50 List Extra).

SHURE

SHURE BROTHERS • *MICROPHONE HEADQUARTERS*

225 West Huron St. • **Chicago, U. S. A.** • **Cable: Shuremicro**

Shure Patents Pending. Licensed under patents of the Brush Development Company.

THE ELECTRON ART

Each month the world's technical literature is scanned to see what physicists and engineers are doing with tubes, for presentation in tabloid form to Electronics' readers

New Standards on Electronics

A NEW standards reports has been issued by the Institute of Radio Engineers dealing with definitions of terms and symbols for electronic devices. A section in this report also deals with the methods of testing vacuum tubes.

The "Standards on Electronics—1938" are, essentially, a revision of a portion of the 1933 I. R. E. Standards Report. Copies of the new report have been mailed gratis to members of the I. R. E. Persons interested in this report may obtain additional information by communicating with the Institute of Radio Engineers, 330 W. 42nd St., New York, N. Y.

Current Articles on Electronics and Related Subjects

THE FOLLOWING bibliography on electronic and related subjects has been prepared from American and foreign publications by Mr. J. G. Sperling. Readers are invited to submit their comments on this compilation.

VACUUM TUBES AND ELECTRON THEORY

Single-Ended R. F. Pentode — R. L. Kelley, J. F. Miller, *Electronics*, Sept. 1938, pp. 26–27; Experimental pentode having g$_1$ cap on base. Increased gain. Decreases regeneration. Simplifies set wiring and construction.

A New Converter Tube For All-Wave Receivers—E. W. Herold, W. A. Harris, T. J. Henry, *RCA Rev.*, July, 1938, pp. 66–77: Non-conventional tube design in 6K8 pentagrid converter. Increased oscillator stability and h–f performance.

A New Converter Valve — J. L. H. Jonker, *Wireless Eng.*, Aug. 1938, pp. 423–431: New shapes of electrodes employed in Phillips FC4. Advantages of octode principle retained. Frequency drift eliminated.

On Electronic Space Charge With Homogeneous Initial Electron Velocity Between Plane Electrodes—M. J. O. Strutt, A. O. Van Der Ziel, *Physica*, Aug. 1938, pp. 705–717: Electronic space charge phenomena in the (gridanode) V-space, with consideration given to returning electrons. Secondary emission of composite surface.

The Permatron, A New Type of Rectifier With Magnetic Control, *QST*, Sept. 1938, pp. 42, 86: Use as a keying rectifier.

On Some Consequences Of Our Simple Relation About Glow Discharge — Y. Kasiwagi, *Proc. Nippon Physico-Math. Soc. Japan*, July, 1938, pp. 568–585: Relation between current intensity and the vertex distance. Explanation of sputtering, Crookes dark space and negative glow.

Phenomena In Amplifier Valves Caused By Secondary Emission — J. L. H. Jonker, *Phillips Tech. Rev.*, July, 1938; Secondary emission can occur from nonconductors at a positive potential. Treatment of this action in tetrodes and c-r tubes described.

High-Power Valves: Construction, Testing And Operation—J. Bell, J. W. Davis, B. S. Gossling, *Jour. I. E. E.*, Aug. 1938, pp. 176–207: Complete treatment of high power water cooled tubes.

Methods Of Measuring Luminescent Screen Potential—H. Nelson, *Jour. App. Phys.*, Sept. 1938, pp. 592–599: Results on determination of potentials of areas on inner surface of vacuum tube glass envelope. Upper limits of monex glass surfaces and willemite screens.

NEW MASS SPECTROMETER

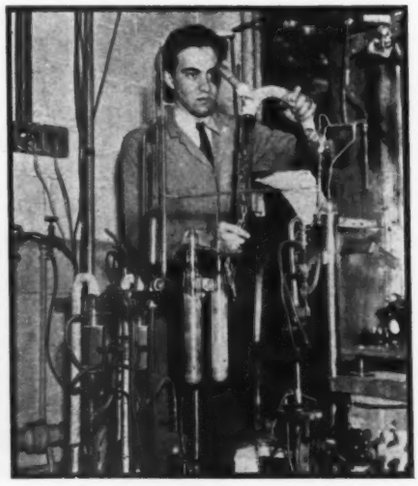

Dr. A. O. Nier of Harvard with his new mass spectrometer, said to be the most accurate "atom sifter" ever devised. It is to be used in studying isotopic forms of matter

R-F CIRCUITS AND TRANSMITTERS

Iron Powder Cores—E. R. Friedlander, *Wireless Eng.*, Sept. 1938, pp. 473–479: Properties of iron cores for receiving coils. Set designers needs and data on present state of art.

Time Constants For A. V. C. Filter Circuits—K. R. Sturley, *Wireless Eng.*, Sept. 1938, pp. 480–494: Study of time constants for series and parallel types of filters up to three stages.

Broadcasting Station LS-1, Buenos Aires—R. E. Coram, A. W. Kishpaugh, W. H. Capen, *Elec. Comm.*, July, 1938: Installation of W. E. 50 KW. transmitter, type 407-A.

Stabilized Feed-Back Oscillators—T. G. H. Stevenson, *Bell Sys. Tech. Jour.*, July, 1938, pp. 458–474: Mathematical development for oscillator with stabilized feedback at constant frequency under changes of electrical potentials or cathode temperature.

The Rome Medium Wave Broadcasting Centre—*Alta Frequenza*, July, 1938, pp. 382–417: Complete information on two 250 kw. transmitters. Both can be operated together with 500 kw. output.

Transient Frequency Variation Of Crystal Oscillator—I. Koga, M. Shoyama, *E. T. J.*, Sept., 1938, pp. 199–201: Tests on Pierce circuit with special crystal show frequency drift due: (a) Temperature difference between two principal surfaces of a crystal plate (b) contact between crystal plate and electrode (c) electrical constants of tube elements.

Carrier And Side Frequency Relations With Multi Tone Frequency Or Phase Modulation—M. G. Crosby, *RCA Rev.*, July, 1938, pp. 103–106: Development of equations for carrier and side frequencies when more than one modulated tone is applied.

High Frequency Stability In Quartz Oscillators Obtained By Positive And Negative Feedback — *Alta Frequenza*, June, 1938, pp. 365–382: Crystal oscillator with conventional positive feedback in addition to negative feedback which is current controlled.

TELEVISION AND FASCIMILE

L. M. T. Laboratories 7-Frequency Radio-Printer, L. Devaux and F. Smets, *Elec. Comm.* July, 1938, pp. 22–34: The characters are scanned in 7 horizontal

(*Continued on page 60*)

Believe it or not...

Unexcelled laboratory and engineering facilities plus dependability in production and performance have made **UTC** a standard source of supply for special transformers.

One organization was discouraged because they discovered that the development on which they were working required unheard of low frequency response. To solve their problem, UTC made a transformer **down** only **2DB at .5 cycles** per second.



WOR liked our 3A universal **equalizer** but wanted **automatic level compensation*** so that changing the equalization would not require a corresponding change in gain setting. UTC delivered . . . and it's a honey.

Phase shift, while of secondary importance in most commercial applications, was a bugaboo to one organization. UTC developed a transformer unit having a **phase shift of 4 degrees** from **20 cycles to 2000 cycles.**

A special aircraft filter built by UTC for an automatic landing system uses an input transformer, five high Q reactors, two output transformers and eight condensers, some as high as 2 mfd. The entire unit occupies a space **2" x 2¼" x 3"** and weighs less than **24 ounces.**

It is relatively simple to produce a 1 mhy. coil having a high Q at 10 kc. A coil having approximately **1 hy.** inductance and operating at this frequency is quite a problem. Through special design UTC supplied this coil with a **Q of 90 at 10 kc.** Similar design results in a Q of almost 200 at 1000 cycles.

A recent beacon unit manufactured by UTC for a development organization steps up 6 VDC to flash a neon tube or kick an electric fence at regular intervals of one second or more **without pendulums, mechanical timers or tubes.**



If you have a special problem write to the UTC Engineering Staff. Our standard products are described in the new compact PS-403 Bulletin. Ask for your copy.

*** Now the standard UTC 3AX equalizer.**

UNITED TRANSFORMER CORP.
72 SPRING STREET • NEW YORK, N.Y.
EXPORT DIVISION 100 VARICK STREET NEW YORK N.Y. CABLES "ARLAB"

lines, each line being represented by an audio frequency. All 7 frequencies simultaneously modulate the carrier. It is claimed considerable interference can be tolerated.

Wide Band Amplification And Modulation In The High Frequencies, Y. Kikuti, *E. T. J.*, Sept. 1938, p. 220: The sending end impedance characteristic of the plate circuit band-pass filter must be so designed that the plate wave form is not deformed. Discussion of effects of filter sending end impedance characteristic on signal frequency distortion.

A Laboratory Television Receiver—D. G. Fink—*Electronics*, Sept. 1938, pp. 22–25: Details of vertical scanning generator and synchronizing circuits. Testing scanning pattern characteristics.

Some Problems of Color Television—M. Von Ardenne, H. Prebler, *T. F. T.*, July, 1938, pp. 264–273: Fundamentals of transmission for clear, undistorted patterns.

Figure Of Merit For Television Performance—A. V. Bedford, *RCA Rev.*, July, 1938, pp. 36–44: Measurement of resolution of television picture as a whole. Use of tapered wedge chart for ease in reading, and sectionalized resolution chart for rigorous measurements.

Photoradio Transmission Of Pictures—H. Shore, *RCA Rev.*, July, 1938, pp. 45–62: Review of systems. RCAC system constant frequency, variable dot transmission.

The Mechanism Of Synchronization In The Linear Time Base—G. F. H. Harker, *Phil. Mag.*, Aug. 1938, pp. 193–213: Study of the aptitude for synchronization of the thyratron time base.

Electron Optic Questions of Television—W. Reusse, *Funktach. Monat.*, July, 1938, pp. 51–54: Regarding focusing of electron beam, and placement of focusing electrode.

ANTENNAS AND TRANSMISSION LINES

Coaxial Cable System For Television Transmission—M. E. Strieby, *Bell Sys. Tech. Jour.*, July, 1938, pp. 438–457: Results of line characteristics between New York and Philadelphia. Description of apparatus.

Coaxial And Balanced Transmission Lines—M. Reed, *Wireless Eng.*, Aug. 1938, pp 414–422: Use of lines as filters, wide-band transformers and impedances. Cases of two lines in parallel under conditions of open and short-circuit terminations.

Graphical Solutions For A Transmission Line Terminated By An Arbitrary Complex Load Impedance — W. Van B. Roberts, *RCA Rev.*, July, 1938, pp. 107–115: Five charts for determining length and characteristic impedance of matching section when line is terminated by complex load impedance.

Distortionless Transmission On Inductively Shunted Transmission Lines—N. Svartholm, *Ericsson Technics*, No. 2, 1938: Transient problem. Solution of Thompson line. Properties of lines loaded with shunt and series impedances.

The Coaxial Cable, Their Use At High Frequencies—R. Belus, *L'Onde Electrique*, July, 1938, pp. 325–337: Review of theory. Consideration of dielectric loss, propagation time, and phase distortion.

Electrical Properties Of Aerials For Medium And Long Wave Broadcasting—W. L. McPherson, *Elec. Comm.*, July, 1938, pp. 44–65: Part 2 of article. Study of low impedance aerial. Polar Diagram. Citation of measured values of current distribution, impedance, from various sources, on real and model aerials.

ACOUSTICS AND A. F. CIRCUITS

On Distortion In Sound Reproduction From Phonograph Records, J. A. Pierce and F. V. Hunt, *Jour. S.M.P.E.*, Aug. 1938, pp. 157–182: Analysis and treatment of harmonic distortion, called tracing distortion, due to the reproducer stylus tip size. Recommendations for vertical and lateral cut records are made. Description of controlled volume expansion in reproduction employing a 12 kc pilot tone.

Acoustic Delay Circuits For Laboratory Use—A. C. Norwine, *Bell Lab. Record*, Aug., 1938, pp. 400–402: Description of delay circuits with time constants from 23 to 150 milliseconds.

Graphs For Exponential Horn Design—A. J. Sanial, *RCA Rev.*, July, 1938, pp. 97–102: Four charts for determining all measurements for correct transmission of sound.

Compression And Expansion In Transmission Of Sound—V. C. Henriquez, *Phillips Tech. Rev.*, July, 1938: Principles of compression and expansion. Study of time delay. Representative circuits.

Combination Tones in Non-Linear Systems—F. Massa, *Electronics*, Sept. 1938, pp. 20–21: (a) Combination tones more disturbing than simple harmonics (b) Distortion at high freq. just as disturbing as at low freq. (c) Peak reading and not r-m-s meters should be used for monitoring.

Automatic Equalization In Disc Recording — G. J. Saliba, *Communications*, Aug. 1938, pp. 15–16, 24: Equalizer automatically compensates for variation in frequency response with changing groove radius.

High Frequency Correction In Resistance Coupled Amplifiers—E. W. Herold, *Communications*, Aug. 1938, pp. 11–14, 22: Results of analysis of correction circuits to find conditions for a flat amplitude and flat time-delay curve.

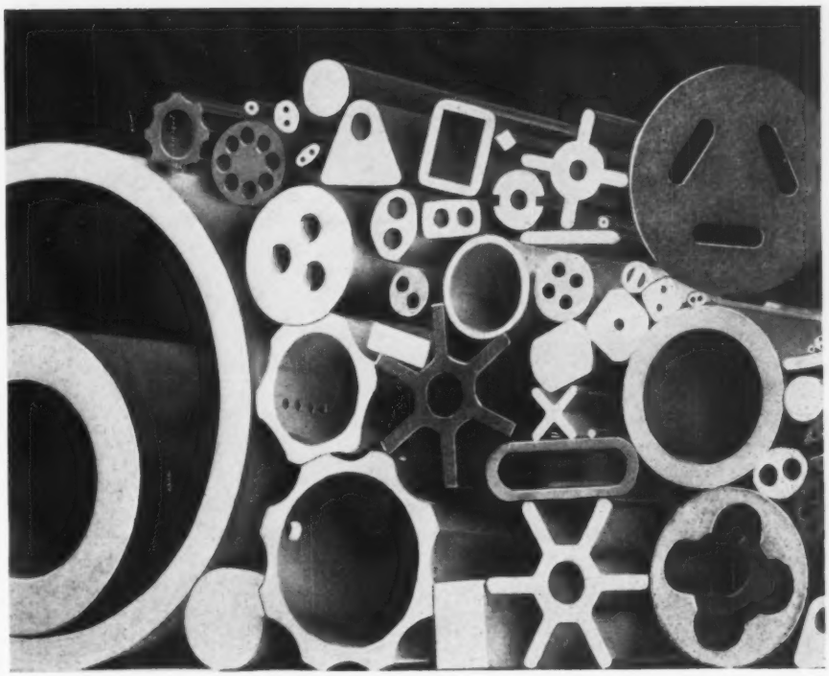

The above shapes are a few of the many varieties possible by our extrusion process.

By our automatic pressing method, we are also able to fabricate Alsimag into many intricate shapes.

Our engineers, from their vast experience with the highly technical, electrical and radio fields, can offer many positive suggestions and assistance for your ceramic problems. Address your inquiries either to us, direct, or to our branch offices, shown below.

AMERICAN Lava Corporation
CHATTANOOGA, TENN.

SALES OFFICES

New York
Boston
Washington
Philadelphia
Chicago
Cleveland
St. Louis
San Francisco
Los Angeles

ON THE Mainliner TOO

United Air Line's entire fleet of 53 transport planes operated over the company's New York — Chicago — California, and Seattle — San Diego airways,

IS EQUIPPED
WITH UNITED ELECTRONIC GRAPHITE ANODE TUBES.

On the new 1938 type Mainliners, flying from coast to coast overnight — as it is on all flights — the pilot is in constant touch with his dispatcher by means of his radio transmitter.

UNITED ELECTRONICS TYPE 361-A is playing its part in the daily flying of 50,000 miles over United Air Line system, on which UNITED has flown 125,000,000 miles — an international record.

UNITED ELECTRONIC TRANSMITTING TUBES are always found in such places as the U. S. Bureau of Air Commerce, Lighthouse Service, Coast Guard, Signal Corp and other governmental departments where careful precision and expert craftsmanship are prime considerations.

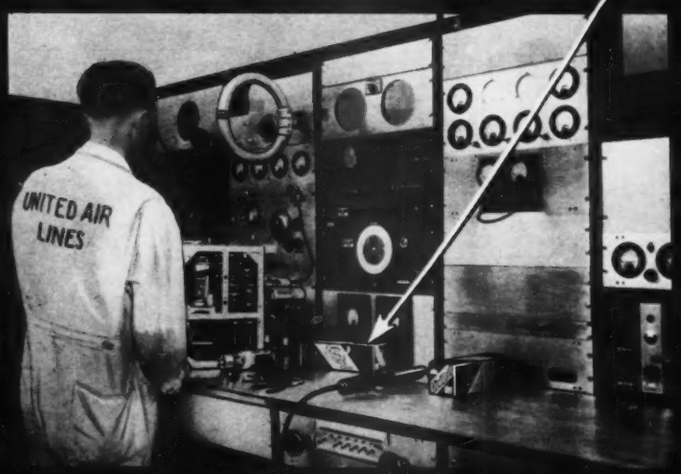

UNITED ELECTRONICS COMPANY

42 Spring Street Cable "UNELCO" Newark, N. J.

MEASUREMENTS

Measuring Equipment Of Dielectric Loss—Angles At High Frequencies—T. Nishi, S. Okazaki, B. Itijo, *E. T. J.*, Sept. 1938, pp. 219–220: Description of apparatus. Capacitance-variation method employed. Range 80–30,000 kc.

A Thermionic Voltmeter With A Linear Law—D. G. Reed, *Jour. Sc. Instr.*, Aug. 1938, pp. 261–263: Frequency limit 1.5 MC. Voltage range straight from 0.1–1.0 volt. Range can be extended.

Electronic Voltmeter Using Feedback—S. Ballantine, *Electronics*, Sept. 1938, pp. 33–35: Wide range A. C. voltmeter. Employs negative feedback in amplifier. Voltage range 0.001–100 v. Freq. range 10–100,000 cps.

A Feedback D-C Meter—J. M. Brumbaugh, A. W. Vance, *Electronics*, Sept., 1938: Multi-purpose meter. Employs negative feedback in amplifier. Measures d-c current voltage, and resistance. Sensitivity, 50 meg./volt.

An Electro-Mechanical Method For Solving Equations —A. H. Schooley, *RCA Rev.*, July, 1938, pp. 86–96: Apparatus for solving cubic and lower degree equations for their real roots.

NON-RADIO APPLICATIONS

Vacuum Relay—C. W. Miller, *Jour. Sci. Instr.*, Aug. 1938, pp. 263–265: A Pirani gauge in one arm of a bridge circuit in conjunction with a thyratron may be used to open or close an external circuit when the pressure in a vacuum system exceeds a given value.

Physics in Pharmacy—R. L. McFarlan, *Jour. App. Phys.*, Sept., 1938, pp 573–578: Photoelectric photometer for measuring vitamin A concentration.

Color Matching In Paper Industry—E. L. Deeter, *Electronics*, Sept. 1938, pp. 18–19: Use of phototubes in bridge circuit to determine color of paper samples by reflected or transmitted light.

Photoelectric Weft-Straightener Control, C. W. LaPierre, A. P. Mansfield, *Elect. Eng.*, Sept. 1938, pp. 513–519: Use of two scanning units to determine skew (deviation from straightness) in weaving and to correct weft.

Electronics Helps Make Beer—*Electronics*, Sept., 1938, p. 13: P. e. counting apparatus for registering beer kegs.

New Adaptations For Speaking Machines—C. Ahlberg, *Ericsson Review*, No. 1, 1938: Use of Ericsson p. e. operated talking machine for distributing weather and road information over telephone system in Oslo.

Biological Effects Of Low Velocity Cathode Rays — C. P. Haskins, *Jour. App. Phys.*, Sept., 1938, pp. 553–561: Electron gun used to kill cancerous and non-cancerous cells. Survey made of relative susceptibility of cells over a wide range of cathode ray velocities.

HERE THEY COME AGAIN

Bigger and Better than Ever!

Rochester Meeting Institute of Radio Engineers Nov. 14-15-16

IN the November, 1937, IRE issue of ELECTRONICS, more than one hundred advertisers took advantage of this annual opportunity to tell their sales stories to a concentration of the most important men in the electronics field. Each year (5-year mean) ELECTRONICS carries 29.9% more advertising in this issue than in the average issue of the year.

This is not brought about by intensive, expensive promotion or by any "special issue" inducements. It is definitely an expression of **value** — accepted as such by advertisers year after year.

Why is this so?

The Rochester meeting of the members of the Institute of Radio Engineers has become an important annual step of progress in this industry. To this meeting come design and production engineers, physicists and executives who feel that attendance is a "must" because of the importance of the engineering papers and discussions, and the display of new products in the booths of the manufacturers who exhibit.

The Convention Issue of ELECTRONICS arrives with the attendants. For those who exhibit, it supplements the advertiser's display. For those who do not exhibit, it serves as a printed sales story and pictorial product display.

The Issue is Intensively Read

This issue is eagerly sought by those who attend the meeting, and it is read by them when the mood is to find things new, better, more economical.

In addition, because of its special significance, this IRE number is carefully studied by the more than 13,000 non-attending subscribers in this and 57 foreign countries.

The importance of your being in this "catalog" of electronic and allied products is evident.

The closing date is October 25th. Early reservation assures you of more desirable position.

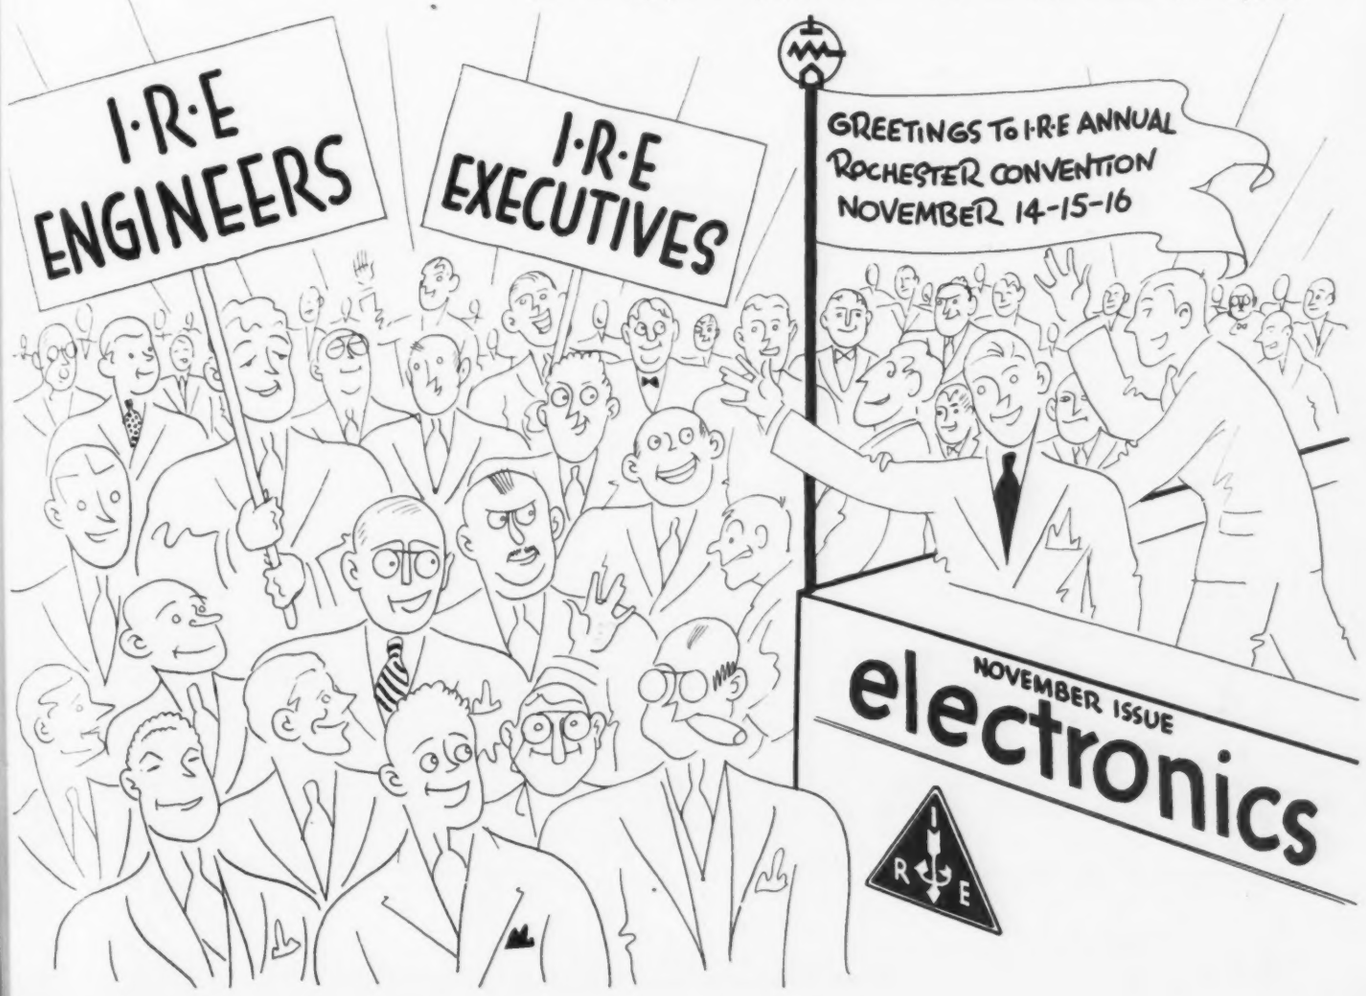

COLLINS *Chooses* OHMITE

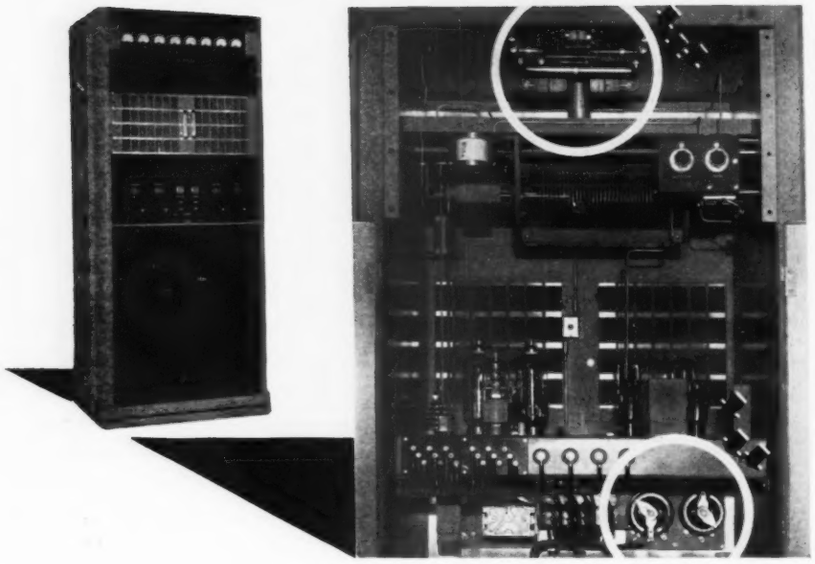

Collins Transmitters equipped with Ohmite Rheostats and Resistors

Combining simplicity, economy and reliability with modern appearance, rugged construction and high quality performance . . . the 300E and the 300F 100/250-watt units shown above are two outstanding examples of the well known Collins line of broadcast transmitters. And Collins uses Ohmite Rheostats* and Resistors exclusively, because of their time-proved dependability. Ohmite all-porcelain Rheostats and Resistors are designed right, built right, and permanently protected by Ohmite vitreous enamel. Their ability to withstand shock and vibration, heat and humidity, insures long, trouble-free service. Available in a wide range of sizes and types. Let Ohmite Engineers analyze your resistance problems and submit samples to meet your exact requirements. (*Underwriters' Laboratories Listed)

Write Today for New Catalog 17

OHMITE MANUFACTURING COMPANY

4825 West Flournoy Street ★ Chicago, U. S. A.

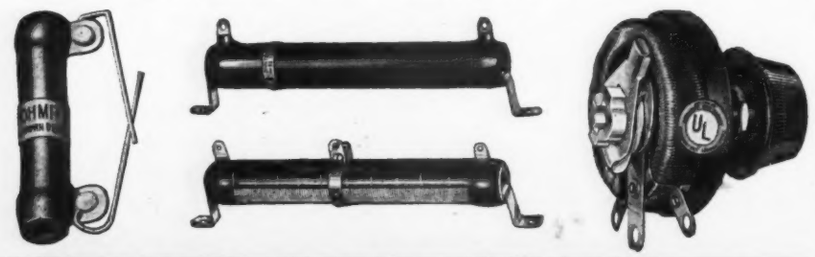

Be Right with **OHMITE**

RHEOSTATS • RESISTORS • TAP SWITCHES

Radio Manufacturing

THE SECOND SERIES of "Story of American Industry" contains a compilation of thirty-two radio speeches which have been given over the Columbia Network, by Harry R. Daniel, under the auspices of the Department of Commerce. Of the thirty-two talks, one is entitled "Radio Manufacturing."

A brief outline of the developments of the radio industry is given in this story of American industry from the popular point of view. Although the article goes back to communication of 3,000 years ago and brings in the development of the electric telegraph, radio is introduced with the experiments of Hertz and Marconi. Brief mention of the work of Fessenden, DeForest, Armstrong and Hazeltine is made and we learn that "credit should be given to all the American scientists such as Fleming."

Copies of the second series of "Story of American Industry" are available from the Government Printing Office, Washington, D. C., at 20 cents per copy.

Precision Frequency Control

A SUMMARY OF the modern methods of precision frequency control, with special emphasis on the frequency spectrum between 500 and 1,500 kc., is given by Geoffrey Tuilger and J. E. Benson in the *A.W.A. Technical Review* for April, 1938. In this article, "Precision Frequency-Control Equipment Using Quartz Crystals", the methods used and the principles involved in the design and making of commercial frequency control equipment for precision to within $\pm 0.001\%$ are set out briefly. Sections dealing with frequency measurements, quartz crystal plates, crystal mountings, temperature control and crystal oscillators are included. Applications of the principles and methods discussed are illustrated by a description of some practical design, and performance data are given.

The *A.W.A. Technical Review* is published by the Amalgamated Wireless (Australasia), Ltd., Sydney, Australia.

Electron Tubes in Industrial Applications

A NON-TECHNICAL article setting forth the characteristics, advantages and disadvantages of electron tube controlled equipment appears in the August issue of *Factory Management and Maintenance*. Under the title "Electron Tubes Never Complain," E. H. Vedder gives a number of useful hints and suggestions concerning a proper installation and operation of electron tube equipment.

The article is non-technical and practical, and should be especially useful to those whose technical knowledge of electronics is somewhat limited. In a succeeding article, the measurement and procedure in locating trouble in industrial electronic apparatus will be discussed.

Simple Sine-Wave Oscillators

A SIMPLE OSCILLATOR circuit using both positive and negative feedback is described by P. M. Honnell in the August issue of the *Review of Scientific Instruments*. The oscillator uses a minimum of parts, and has been found to be very free from harmonic content, particularly at low audio-frequency.

As shown in Fig. 1, the circuit is a



Fig. 1—Circuit of sine-wave oscillator using negative feedback

tuned-plate type of oscillator with energy being fed back from coil L_1 to coil L_2 in the grid circuit, which is untuned. Negative feedback is introduced by means of the variable resistor in the cathode circuit. It has been found that this resistance, R, requires slight readjustments for each oscillation frequency if threshold conditions are to be maintained. Values of the resistance R smaller than those for the threshold of oscillation result in increased power output and increased harmonic content. The circuit has been used with triodes having an amplification factor anywhere between 3 and 20, and satisfactory results have been obtained. For test tubes, the resistance R should be variable from 0 to 5,000 ohms.

• • •

Printing Telegraph System

AN INGENIOUS printing telegraph system for wire communication in which the original text is scanned in much the same manner as facsimile transmission is described by L. DeVaux and F. Mets in the July issue of *Electrical Communication*. Their article "L.M.T. Laboratories Seven Frequency Radio-Printer" describes the theory of operation, practical applications, and the results obtained by the equipment manufactured by the L.M.T. Laboratories at Paris, France. The article is much too long and extended to reproduce here with any detail, and the original article should be consulted for complete details.

An outline of the method of operation, however, may be summarized briefly. In this radio printer system developed in the L.M.T. Laboratories, the characters are scanned and analyzed into seven horizontal lines, each line being represented in the electrical transmission by one definite audio frequency. The lines are transmitted simultaneously rather than in sequence,

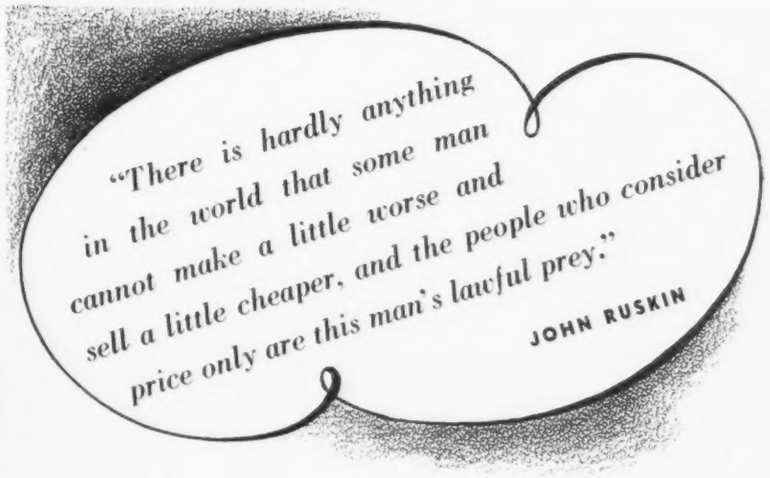
"There is hardly anything
in the world that some man
cannot make a little worse and
sell a little cheaper, and the people who consider
price only are this man's lawful prey."
JOHN RUSKIN

WE WILL NOT BUILD A LITTLE WORSE—
WE WILL NOT SELL A LITTLE CHEAPER—

NOT ONCE in 56 years of making Ferranti Coils and other Ferranti products have we lowered our standards of workmanship to meet competition in the price field.

Not once have we been influenced by the men who consider price only . . . for we know that the most expensive commodity in the world is usually the lowest priced item on the market where dollars alone are considered.

For more than half a century, Ferranti products have been made a little better . . . but that is only part of the story.

Ferranti *plus* value is found, too, in the buyer-protective financial responsibility of this Company . . . in the consulting and designing service rendered by experienced Ferranti Engineers . . . and in the undeviating way we live up to the promises of shipment made to the buyer before the order is received.

These are the reasons why experienced users of Ferranti products never consider price only in their buying.

Send for Bulletins completely describing the latest Ferranti products.

Ferranti ELECTRIC INCORPORATED
RCA BUILDING
NEW YORK, N.Y.
FOR VALUE RECEIVED

Type CR-6 Beat Frequency
STANDARD SIGNAL GENERATOR

- **Two Logarithmic frequency ranges 10-20,000 and 10-50,000 cps.**
- **Maximum output 5 watts. Level constant ± 0.5 db from 10 to 20,000 cps.**
- **Ladder attenuator and voltmeter supplying standard signal down to 10×10^{-5} VOLTS FULL SCALE.**
- **Harmonic content less than 1.5% above 20 cycles at full output. Distortion drops substantially at lower outputs.**
- **Flexible shaft connection provided for recording equipment.**

Write for complete specifications and details on U.S.E. Instruments.

UNITED SOUND ENGINEERING COMPANY
MANUFACTURERS OF ELECTRONIC EQUIPMENT UNDER A. T. & T. AND WESTERN ELECTRIC PATENTS
2235 UNIVERSITY AVE. ST. PAUL, MINN.

INSTRUMENTS ★ CALL-PHONES
CENTRALIZED RADIO
PUBLIC ADDRESS
SPECIAL EQUIPMENT

and the radio carrier is, therefore, modulated simultaneously by all of the seven audio frequencies corresponding to the seven horizontal lines. This arrangement enables a high speed of record printing to be obtained, combined with a modulation at an audio frequency and a resultant high degree of reliability in printing.

The equipment operates on the "start-stop" principle so that the receiver mechanism is automatically set in motion at the beginning of each character transmission and automatically stopped when transmission of that character has been completed. In this system there is no need to maintain synchronism between the transmitter and receiver mechanism, and the receiver may consequently be left unattended.

The "marking" or "printing" condition may correspond either to the existence or to the suppression of the carrier frequency. The latter condition has been adopted so that the general effect of static is not to print unwanted components of letters, but to suppress points in the characters, which in the majority of cases, remain perfectly legible.

• • •

Self-Regulated Rectifiers

THE SEPTEMBER, 1938, issue of the *Bell Laboratories Record* contains an article by T. E. Trucksess, entitled "Regulated Tube Rectifiers Using Magnitude Control" which have been used for charging storage batteries automatically at some predetermined rate. A grid controlled rectifier or thyratron is employed for rectification, the voltage on the grid determining the charging current by establishing the fraction of the positive cycle for which the tube becomes conductive.

A simple half-wave rectifier circuit which uses the magnitude method of self-regulation, is shown in Fig. 1. In

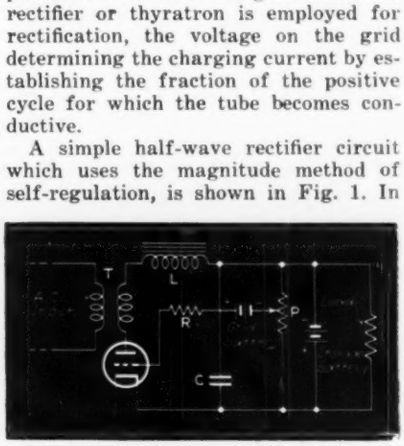

Fig. 1—Wiring circuit of half-wave regulated rectifier

this circuit, the alternating voltage to be rectified is fed to the tube from the transformer. The choke L and condenser C form a simple filter so that the current flowing into the storage battery and load is sensibly constant. The control circuit which determines the portion of the cycle for which the tube becomes conductive, consists of the voltage divider P, the grid battery, the grid resistance, and the grid of the thyratron. The function of the resistor R is to limit the magnitude of the grid current which flows.

When the load is applied to the recti-

fier the output voltage decreases and this change, reaching the grid through the regulating circuit, permits the tube to conduct earlier in the cycle. As a result, rectified current flows through the tube for a longer part of the positive cycle and the charging current is increased. This causes an increase in the output voltage sufficiently to return it to the regulated value.

A circuit with magnitude control arranged for full-wave operation is shown in Fig. 2. The operation of this full-

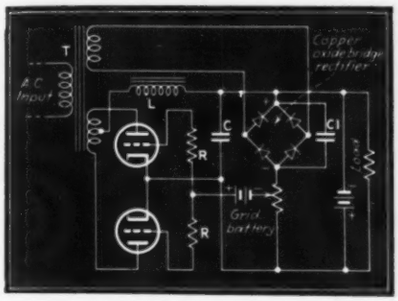

Fig. 2—Full-wave self regulated rectifier circuit

wave circuit is similar to that of the half-wave circuit, with each tube operating on alternate halves of the cycle. In this circuit, if the alternating input voltage changes, the regulating circuit can be compensated for the effect on the plate voltage of the tube. The grid voltage required to make the tube fire also changes at the same time and causes the output voltage to increase with the plate voltage. This effect may be nullified by connecting in the potentiometer circuit a small direct voltage obtained from a copper oxide rectifier and a winding on the plate transformer. The ripple in this voltage is smoothed by the condenser C_1. If the alternating input voltage increases, the direct voltage supplied by the copper oxide unit would also increase proportionately and the potential applied to the grids of the tubes, through the grid battery, will be more negative. This causes the tube to pass current later in the cycle and compensates for the added input voltage, if the copper oxide rectifier is properly selected.

• • •

Electronics in Pharmacy

RESEARCH HAS a peculiar habit of bringing together strange bedfellows. One electrical engineer becomes a biologist, another becomes a recognized authority on photography, a photographic supply house is responsible for the introduction of a new series high vacuum pumps, and a mathematician evolves a new method of electrical analysis. All of these are the direct result of scientific research.

In "Physics in Pharmacy" appearing in the September issue of the *Journal of Applied Physics*, Ronald L. McFarlan enumerates some of the more recent advances in which physics has played an important part in pharmaceutical analyses. It is pointed out in

Now... SCULLY RECORDING MACHINES at Reduced Prices!

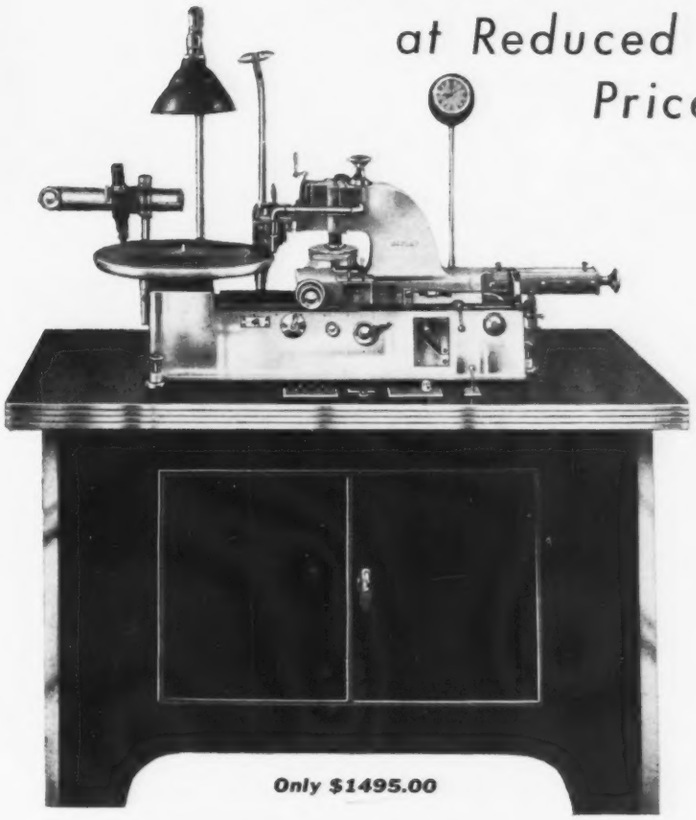

Only $1495.00

The world-famous Scully recording machines have just been reduced in price — now are within the reach of all discriminating recording studios and radio stations. • These are the strictly professional, two-speed recorders used by RCA Victor, Paramount-Publix, Columbia, American Printing House for the Blind, and many other prominent United States firms. Foreign installations include England, France, Italy, Russia, Japan and South America. • Write today for complete details.

SCULLY MASTER RECORDERS

SCULLY
MACHINE COMPANY
62 Walter Street Bridgeport, Conn.
Manufacturers of precision disc recording machines exclusively for the past 18 years

EYE Appeal

INSUROK

THE SUPERIOR PLASTIC MOLDED OR LAMINATED

NOT the least of the many profitable advantages products gain through the use of INSUROK is improved appearance; greater eye-appeal; increased salability. This is of vital importance to all manufacturers of consumer merchandise, where beauty influences selection to a marked degree.

Products made of INSUROK require no further surface treatment — they possess the enhanced appearance that wins favorable attention, simplifies selection, makes sales.

The RICHARDSON COMPANY
MELROSE PARK, CHICAGO, ILL. FOUNDED 1858 LOCKLAND, CINCINNATI, OHIO
NEW BRUNSWICK, N. J. INDIANAPOLIS, IND
DETROIT OFFICE 4-252 G. M. BUILDING, PHONE MADISON 3260
NEW YORK OFFICE 11 WEST 42ND STREET, PHONE WHITEHALL 4-4487

this article that spectroscopy x-rays, fluorescence, colorimetry, polarization and photoelectricity as well as other miscellaneous applications of physical and electrical principles are used as an aid to determining or specifying the purity of drugs.

In spectroscopy, the use of emission spectra for the detection of small metallic impurities is rapidly gaining in popularity. In the routine examination of drugs for control purposes there is often a need for a quick method of detecting the presence of impurities. One excellent tool for this purpose is a properly constructed fluorescent lamp. A photoelectric fluorometer has recently been adapted to the measurement of aneurin-vitamin B_1. The colorimetric test, officially recognized at present by the *Pharmacopoeia* consists of the visual comparison of the colors of pharmacopoeial drugs with the colors of standard colorimetric solutions. The use of photoelectric color comparatives is an aid in colorimetric analysis.

With the increasing application of optical principles to the problems of pharmaceutical analysis, it is natural that the photoelectric devices should frequently be employed to measure the light intensities by means of which many pharmaceuticals are analyzed. It is but a matter of time before photoelectric instruments will be used to

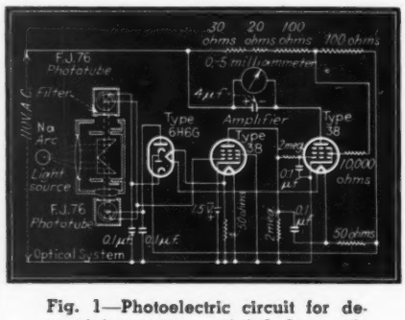

Fig. 1—Photoelectric circuit for determining potency of fish liver oil

assay other vitamins as well. These instruments are not only supplanting and replacing many of the older methods, but are also opening new fields of research.

Color comparators and analyzers which are based on photoelectric methods of light intensity measurements are finding many useful applications. The reason for the strong popularity of photoelectric color measuring equipment lies in the rapidity of making observations, the absence of eye fatigue, the elimination of the necessity of a trained observer, the full intensity at the end reached for the spectrum and the high accuracy of the observation. Among the useful pharmaceutical applications are the colorimetric determinations of hydrogen ion concentration, fluorescent measurements, micro-analysis and complex organic and biological assays. The ready adaptability of these photoelectric color comparatives to viscosity and turbidity measurements increases their usefulness to the pharmaceutical chemist.

A good illustration showing the use

"Tell Smith to be sure and get figures from LINGO for that new radiator"

TODAY in hundreds of stations there is an amazing increase of interest among engineers and station managers in LINGO Vertical Tubular Steel Radiators . . . a new realization that LINGO Radiators give a *higher* performance value than any other type of antenna yet attained!

Here's the Radiator that meets your particular needs—

● After you investigate the amazing story of LINGO efficiency and economy, you will probably realize that here, indeed, are *new standards* that vitally affect *you*. And if you are like many other alert radiomen you will want to do something about it. You will want to take advantage of this new high in efficiency and new low in cost.

Send complete information on location, power and frequency of station . . . and we can show you how LINGO "Tube" Radiators can meet your particular needs, and also quote *complete prices in advance* for both construction and erection.

Write Today

for illustrated folder:
"New Standards for Vertical Radiators"

JOHN E. LINGO & SON, Inc.
Dept E10 Camden, N. J.

LINGO
VERTICAL TUBULAR STEEL RADIATORS

Compensate
For
Frequency Drift

with
ERIE
CERAMICONS

These ceramic dielectric condensers with silver plates in intimate contact can be used to directly compensate for reactance changes in oscillator circuits. Single insulated units are made up to 375 mmf with highest negative temperature coefficient (.00068/°C.), up to 80 mmf with zero temperature coefficient and up to 65 mmf with highest positive temperature coefficient (.00012/°C.). Non-insulated units on the same respective temperature coefficients are made up to 1,000, 250 and 190 mmf.

1. RANGE: 1 to 1,000 mmf as noted above.

2. RATING: 500 volts D.C. Tested at 1,150 volts A.C.

3. POWER FACTOR: From .06% to .09% at 1,500 kc, depending on temperature coefficient.

4. STABILITY: Practically unaffected by alternate heating and cooling. Change less than 0.1% after 100 hours at 100% relative humidity at 40°C.

5. TEMPERATURE COEFFICIENT: Definite, linear and reproducable. Furnished with any desired coefficient between —.00068 to +.00012/°C.

Write for fully descriptive literature

ERIE
CERAMICONS

to which photoelectric devices may be put for the determination of absorption spectra is found in the determination of the vitamin A potency of fish liver oil, and ultra-violet absorption spectrum. Various physical instruments have been developed for measuring vitamin A concentration. All these instruments measure quantitatively the absorption of light in the region of 3,200 A by oils containing vitamin A. A schematic wiring diagram of one such instrument is shown in Fig. 1. With this instrument it has been found possible to obtain a measurement of the vitamin A potency of a properly diluted oil to 1 per cent accuracy in less than two minutes, exclusive of the time required for diluting the oil.

• • •

Luminescent Screen Potential

A METHOD has been devised by Herbert Nelson for the determination of potentials of areas on the interior surface of the glass envelopes of vacuum tubes, and is described in the article "Method of Measuring Luminiscent Screen Potential" in the September issue of the *Journal of Applied Physics*. The method depends upon the determination of three voltages. One of these is the voltage between the second anode, and the outside face of the cathode ray tube. This voltage is designated as E_1 in Fig. 1. The



Fig. 1—Circuit showing method of measuring screen potentials of cathode ray tubes

second voltage, E_c, is a potential of the control element of the electrometer tube with respect to the negative terminal of the filament. The determination of this voltage E_c may be made on the basis of a previous calibration of the electrometer tube. The screen potential E_s is therefore the sum of the voltages E_1 and E_c. This method has the advantage in that measurements may be made on almost any type of finished tube.

As a result of measurements made for kinescopes under different conditions, it was found as a general feature that as the second anode is made increasingly positive, the screen follows and remains a few volts negative with respect to the second anode until despatched to the upper limits of the potential with respect to the cathode. When his occurs, he screen rapidly becomes more negative with respect to the second anode.

Eliminate
Condenser
Frequency Drift

with
ERIE
SILVER-MICA
CONDENSERS

These mica dielectric condensers with silver plates in intimate contact are designed for use in place of ordinary mica condensers to prevent frequency drift. Because their temperature coefficient is only +.000025/°C. or less, and since they can be supplied with tolerances as low as ±1%, Erie Silver-Micas will keep the frequency independent of temperature in tuned circuits where the other elements are stable.

1. RANGE: 15 mmf to 2,500 mmf.

2. RATING: 500 volts D.C. Tested at 1,150 volts A.C.

3. POWER FACTOR: Less than .04% at 1,500 kc.

4. STABILITY: Practically unaffected by alternate heating and cooling. Change less than 0.1% after 100 hours at 100% relative humidity at 40°C.

5. TEMPERATURE COEFFICIENT: +.000025/°C. or less.

Write for fully descriptive literature.

ERIE
SILVER-MICA
CONDENSERS

ALLIED

RECORDING EQUIPMENT

PERMANENT AND PORTABLE RECORDERS

Designed especially for radio stations and commercial recording studios. Engineered and manufactured with laboratory precision by men who understand recording problems.

Models available for colleges and schools, commercial, musical and industrial use.

"CLEEN CUT" RECORDING BLANKS

Meet the CRITICAL requirements of professional recording.

A GOOD BLANK IS THE FOUNDATION OF GOOD RECORDING

PROMPT DELIVERIES

Our newly enlarged manufacturing facilities permit us to fill and ship all blank orders the same day of receipt of order.

CUTTING STYLII

Sappire — Stellite — Steel



ALSO QUALITY REPRODUCING NEEDLES AVAILABLE IN LARGE OR SMALL QUANTITIES.

A trial will prove their superiority

Write for 8 page bulletin describing Allied Recording Equipment

ALLIED RECORDING PRODUCTS COMPANY

126 West 46th St., New York City

Cable Address: ALLRECORD

THE INDUSTRY IN REVIEW

Co-Axial Transmission Cable . . . . *By J. L. Bernard*

AN INEXPENSIVE co-axial transmission line of small size, greater flexibility and one not requiring gas drying agents has long been in demand, and while cotton, treated cellulose, rubber, etc., have been at the disposal of the transmission line manufacturer, it is desirable that the dielectric used for this purpose be one of the inorganic group and preferably one having a low dielectric constant and power factor. The conventional procedure of insulating the elements of a transmission line with ceramic spacing insulators could be followed, but fabrication by this method is neither economical nor conducive to a product sufficiently free from installation difficulties to admit it to general use.

The hope had been that a "flexible ceramic"—steatite, porcelain, glass or the ultimate fused quartz with the workability of cotton—might put in its appearance among the engineering materials of radio to aid in the solution of line construction problems. If obtainable the co-axial transmission line might be raised to a new level of performance and vastly increased serviceability. The search for such a product resulted in the introduction of good electrical grades of spun glass. This dielectric simultaneously provides the desired electrical and physical qualities for the production of ¼" co-axial line. Application of spun glass to transmission lines was first limited to this small dimension although development work in connection with larger lines is now in progress.

By applying "a braid of glass" to the inner conductor of the line, a free space ratio is obtained in this new line which gives low loss without risk of short circuit between inner conductor and sheath at an arbitrarily chosen bending radius of 3". This is accomplished by winding the glass around the inner conductor in spiral fashion. The braid diameter and winding pitch best suited to produce the lowest loss consistent with rigid mechanical requirements were the principal factors in determining bending radius. The sheath of this line may be bent back upon itself without shorting.

The high degree of flexibility of solid wall copper tubing resulting from recently improved annealing methods has contributed much to place this transmission line in a class with ordinary electrical cable insofar as flexibility is concerned. The new ¼-in. line may be wound on small spools from which it may be drawn directly and snaked through conduit, partitions, shaft-ways, run in trenches, etc., with not much greater care than is necessary with ordinary rubber insulated wire and cable. Thus, the need for right angle junction boxes and painstaking forming of the sheath to avoid short circuits at bends, along with other special installation requirements are eliminated.

* Communication Products Inc.

After manufacture, the ¼ in. copper tubing, serving as the sheath of the line, is thoroughly dehydrated by heating in furnaces in which a reducing gas is admitted. It is then promptly sealed to prevent the admission of moist air. The spiral construction of the inner elements, heated to 300° F. before being inserted in the sheath, fit closely within it and tend to seal the line well enough to exclude appreciable quantities of moisture. Tightly fitting insulated terminals are also provided. The d-c resistance of the line remains well above 50 megohms in 500 foot lengths in spite of wide variations in temperature, atmospheric pressure and moisture.

The surge impedance of the new ¼ in. line is approximately 75 ohms. It has been successfully used for the past eighteen months on transmitters which deliver a power input of 300 watts to the line at about 60 megacycles. While the power loss in this cable is greater than that in larger diameter lines it is apparently well adapted to low power service at high frequencies in reasonable lengths and is very satisfactory for receiving installations in long lengths.

DRAKE

PILOT LIGHT ASSEMBLIES

Do the Job Better, Faster and More Economically!

Drake Pilot and Jewel Light Assemblies are built to highest standards . . . yet cost no more than ordinary types. . . . Drake offers you a more complete selection of . . . Standard Types . . . Special Types . . . "Underwriters Approved" Types . . . Bayonet, Screw and Bracket Types . . . Jewel Types . . . and hundreds of others. Send for Free Catalog.

★ENGINEERS: Drake Assemblies are designed with a safety factor adequate to meet varying conditions in the field. Materials are finest grade. Our engineers will cooperate with you on your Pilot Light problems . . . no obligation.

DRAKE MANUFACTURING CO.

1713 W. Hubbard St., Chicago, U.S.A.

News

♦ G. H. Browning is back in the radio industry with a new Corporation which will specialize in kit receivers and tuners for the amateur and experimenter. It will be known as Browning Laboratories, Inc., 750 Main St., Winchester, Mass. . . . United American Bosch Corp., Springfield, Mass., announce that because they are retiring from the radio business they have sold their Police Radio Division to Fred M. Link, 15 East 26 St., New York City, who is taking over the current Bosch inventory. This acquisition will give Mr. Link, who is a licensee of the A. T. & T. a complete line of police radio equipment. Morris Metcalf, former Bosch vice president, will join the Link organization. . . . Victor J. Andrew, consulting engineer and manufacturer of broadcast and aviation transmitter equipment, announces that due to increasing business this past year his organization has purchased new and larger quarters at 6429 S. Lavergne Ave., Chicago. . . . Allegheny Ludlum Steel Co. and Ludlum Steel Co. announce the formation of the Allegheny Ludlum Steel Corp. Business will be handled through present channels. . . . T. Kennedy Stevenson was elected president and a director of Electrical Research Products, Inc., a subsidiary of Western Electric Co., with whom he has been associated for the past 24 years. He succeeds the late Whitford Drake. . . . Society of Motion Picture Engineers, Fall Convention will be held in Detroit from October 31 to November 2 when a presentation of the Progress Medal (awarded in recognition of any invention, research or development, of significant advance in the field's technology), and the Journal Award (made to authors or an author of the most outstanding paper originally published in the Society's Journal) will be made. SMPE has recently completed nominations of its officers for 1939. . . . American Lava Corp. of Chattanooga, Tenn., has acquired all equipment of the American Ceramics & Specialties Corp., Jackson, Mich. Carl R. Hower, Vice President and Manager, and O. D. Riseden, Production Engineer, will be retained in Sales and Engineering capacities with American Lava. . . . RCA recently started preliminary tests of facsimile transmission and reception between Philadelphia and its exhibit building on the World's Fair Ground in Flushing, N. Y. RCA plans to exhibit and demonstrate facsimile equipment designed for use in the home.

Literature

Photometer. Photrix Universal, Models A and B. 4-page bulletin thoroughly describes precision instruments for studio, darkroom, laboratory and test-room. Dr. F. Loewenberg, 10 E. 40 St., New York City.

WHAT——?

PRICE——?

POWER——?

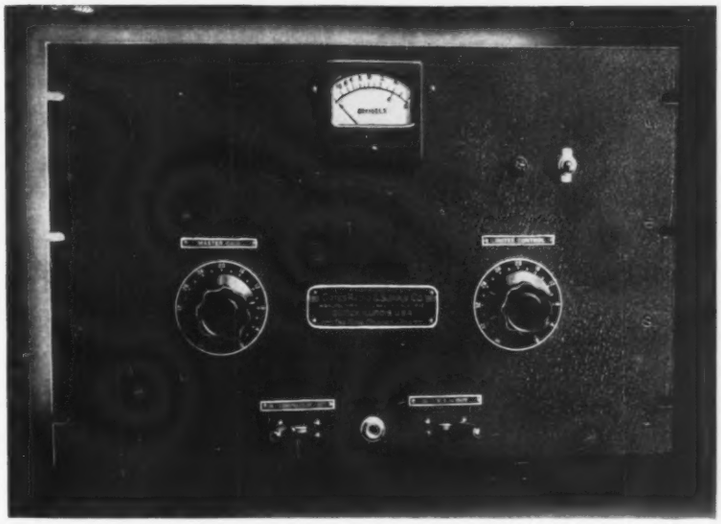

WHAT are you paying for carrier power, Mr. Broadcaster? What have you paid for a power increase? Don't tell us, because we know the figure was mighty generous. We can tell you how to give that signal more punch, however, and at a mighty low cost.

The Gates 27-C Peak Limiting Amplifier has been regularly bringing us unsolicited reports of as much as double wallop after its installation, yet the cost is less than one-sixth that of a good 1500-foot tower or a mere fraction the cost of a new transmitter. Its power consumption is 150 watts.



REAR VIEW

Now we do not say the 27-C takes the place of a new tower or a new transmitter, but what it will add to an old or new transmitter in direct signal increase makes these other investments proportionately very expensive.

Yes—if you are looking for more listeners, a wider radius, less hash in your secondary area as well as an excellent protection against overmodulation you will be looking into the new Gates 27-C Peak Limiting Amplifier.

Write for catalog bulletin CM27 today

GATES RADIO & SUPPLY CO.

MANUFACTURING ENGINEERS SINCE 1922

QUINCY, ILLINOIS, U.S.A.

CABLE ADDRESS (GATESRADIO)

The Time Proven Line

HAVE YOU HEARD

A MODERN PRESTO

INSTANTANEOUS RECORDING?

SEND FOR A FREE SAMPLE RECORDING OF VOICES AND MUSIC MADE ON THE LATEST PRESTO EQUIPMENT AT BOTH 33 1/3 AND 78 RPM. COMPARE THE QUALITY OF REPRODUCTION WITH OTHER INSTANTANEOUS RECORDINGS YOU HAVE HEARD IN THE PAST. DISCOVER THE AMAZING RESULTS OBTAINED WITH THE NEW PRESTO "Q" DISC, THE PRESTO AUTOMATIC EQUALIZER, THE PRESTO HIGH FIDELITY CUTTING HEAD.

SEND for our new booklet telling of the **industrial** *uses of Presto sound recording equipment. Clip this coupon and mail it today.*

PRESTO RECORDING CORP.
143 W. 19th St., N. Y. City

Gentlemen: Send me your sample recording and booklet describing the industrial uses of sound recording equipment.

Name .....

Address .....

Firm .....

Relays. Complete line described in booklet. Advance Electric Co., 1260 W. 2nd St., Los Angeles, Cal.

Industrial Temperature Guages. 12-page booklet contains specifications, illustrations, and sectional diagrams. Weston Electrical Instrument Corp., Newark, N. J.

1938–1939 Catalog. Cathode Ray Tubes, Oscillographs and Accessory Apparatus. Allen B. Du Mont Laboratories, Inc., Passaic, N. J.

Radio Power Equipment. As well as small air-insulated equipment for radio power circuits are listed in Bulletin 43-1, American Transformer Co., 178 Emmet St., Newark, N. J.

Industrial Controller. Checking list and catalog sheets available for holders of Industrial Controller Division catalogues of Square D Co., 710 S. 3rd St., Milwaukee, Wis.

Enclosed Safety Switches. Type RBA heavy duty industrial switch supersedes old RB line. Descriptive bulletin available. Trumbull Electric Mfg. Co., Plainville, Conn.

Thermal Time Delay Relays. Bulletin 351 describes three different types. Ward Leonard Electric Co., Mount Vernon, N. Y.

Panel Instruments. 37 line, covering industrial and radio applications in a variety of forms described in 12-page illustrated catalog. Catalog section 43-370. Westinghouse Electric & Mfg. Co., E. Pittsburgh, Pa.

Clays. Especially for use with porcelain enamels. Color chart and descriptive matter. Porcelain Enamel & Mfg. Co., Pemco & Eastern Aves., Baltimore, Md.

Welders. Electric spot and arc welders are listed in new catalog #38-T, "Transformers in the Making". Eisler Engineering Co., 740 S. 13th St., Newark, N. J.

Thermionic Amplifier. For pH and other potential measurements in high resistance circuits. Described in 8-page Catalog E-OOA. Leeds & Northrup Co., 4907 Stenton Ave., Philadelphia, Pa.

Quartz Crystals. For general communication frequencies. Catalog G-10. Bliley Electric Co., Union Station Bldg., Erie, Pa.

Armite. Is an improved thin insulation (fish paper) for electrical and mechanical uses. Described in bulletin "New Standards for Spaulding Armite". Spaulding Fibre Co., Inc., 310 Wheeler St., Tonawanda, N. Y.

Bi-Phonic Reproducer. Is a scientific tone chamber designed for use with loud-speaker cones. Thoroughly described in bulletin. Bi-Phonic Laboratories, 5 Carman Place, Baldwin, L. I.

Backed by

A. A. E.

● **Aiding you select not only the correct condensers but also the other components that will work best in your assembly —that spells Aerovox Application Engineering, or just A.A.E. for short.**

It's this broader interest in your problems, frequently resulting in savings of tens of thousands of dollars in a single season's production, that makes AEROVOX an important factor in the success of many radio and allied manufacturers.

Submit Your Problem . . .

Our engineers will provide genuine collaboration bearing on your *entire assembly* problem. Specifications, samples and quotations cheerfully submitted.

AEROVOX
CORPORATION
70 Washington St. : : Brooklyn, N. Y.
IN CANADA: AEROVOX CANADA, Limited Hamilton, Ont.

Apparatus and Technique. "The Laboratory" is published for those interested in keeping informed on latest developments. Fisher Scientific Co., 711 Forbes St., Pittsburgh, Pa.

Public Address Systems. 20-page catalog No. P9-38A describes new complete line of sound systems. David Bogen Co., Inc., 663 Broadway, New York City.

Radio Parts. Catalog No. 1038-R describes the latest designs of home and multiple antenna systems and accessories, as well as auto aerials. L. S. Brach Mfg. Corp., 55 Dickinson St., Newark, N. J.

New Products

Rotary Switch

TYPE GRL rotary switch has been announced by General Control Co., Cambridge, Mass. Operating tests show a performance of over 255,000 cycles of operation under load. Countless number of circuit changes are provided for by 12 shaft positions, 8 separate multiple spring assembly units, and the various cams and cam positions. It has the same contact spring assembly design as Type GCL Cam Lever Switch.

Recording Machine

USABLE AT 33 1/3 or 78 rpm and making records up to 18 in. diameter on either wax or prepared discs describes a new low priced recorder manufactured by Scully Machine Co., Bridgeport, Conn. A newly designed suction nozzle and collector jar eliminates difficulties of chip removal regardless of static charge. Seven changes of feed are instantly available from 88 to 136 lines to an inch. Dual feed screws permit immediate choice of feed direction from the outside-in or the inside-out. Coarse starting, finishing, and spacing line together with automatic concentric finishing line are incorporated in the feed mechanism.

Small Size Tube Tester

MODEL 333, weighing 7 lbs., has been announced by the Simpson Electric Co., 5218 W. Kinzie St., Chicago. Lamps of various filament voltages, gaseous rectifiers, and ballast tubes can be tested direct in socket for burn outs and opens. Filament switching is provided for testing double filament tubes. No adapters or special sockets are required. An RMA standard circuit is used.

AUTOMATIC ELECTRIC

makes **MORE** relays . . . . .
makes **BETTER** relays . . . . .
makes **MORE VARIETIES** of relays
THAN ANY OTHER MANUFACTURER!

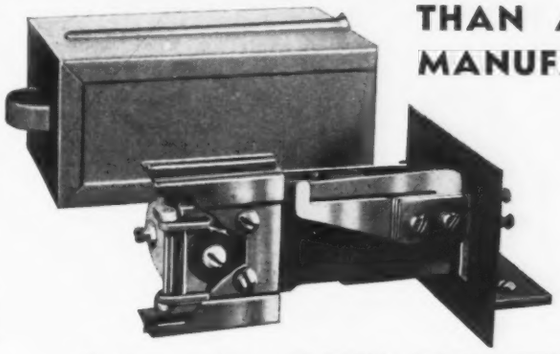

AND—when you buy an Automatic Electric Relay you get a precision product designed and constructed by an *experienced* company—for Automatic Electric has been making relays LONGER than any other manufacturer!

Relays for EVERY INDUSTRIAL Need

● The Automatic Electric line of relays includes quick and delayed action types, sensitive and heavy duty types, mechanical locking types, polarized relays, etc. Available with any contact combination and for operation on D. C. or A. C. circuits of any voltage.

● Write for complete illustrated catalog of relays, stepping switches, electric counters, solenoids, keys, and other electrical control accessories. Address American Automatic Electric Sales Company, 1033 W. Van Buren St., Chicago.

AUTOMATIC ELECTRIC

MAKERS OF TELEPHONE AND SIGNALING APPARATUS
ELECTRICAL ENGINEERS, DESIGNERS AND CONSULTANTS



FREQUENCY MEASUREMENTS

————up to 56 megacycles

————accuracy 0.01%

the type 103 . . . MICROMETER FREQUENCY METER features an • Exceptionally stable "ratio-coupled" oscillator. • 50-turn dial plus Veeder counter, highly accurate. • Measurements on any channels, from 1.5 to 56 mc. • Direct-reading percentage-deviation calibrations. • Panel trimmer, if set to WWV or broadcast monitor, multiplies rated accuracy. • Price, $90.00.

Write for data on this high-grade, precision instrument

LAMPKIN LABORATORIES : : : : BRADENTON, FLORIDA

Frequency Measuring Service

Many stations find this exact measuring service of great value for routine observation of transmitter performance and for accurately calibrating their own monitors.

MEASUREMENTS WHEN YOU NEED THEM MOST
at any hour every day in the year

R.C.A. COMMUNICATIONS, Inc.
Commercial Dept.
A RADIO CORPORATION OF AMERICA SERVICE
66 BROAD STREET NEW YORK, N. Y.

DU MONT TELETRONS

The Du Mont Type 144-9-T Teletron is a practical 14 inch screen cathode ray tube for Television viewing. Equipped with electrostatic deflection plates, sweep circuits are simplified



and danger of screen burning eliminated. The shape of this tube obviates any danger of collapse due to atmospheric pressure.

Other features are high brilliance, black and white screen, minimum modulating voltage requirements and uniform focus over the entire screen. Other sizes are available.

We invite inquiries from set design engineers.

FOR FURTHER INFORMATION WRITE

ALLEN B. DU MONT LABORATORIES, INC.

PASSAIC, NEW JERSEY

CABLE ADDRESS—WESPEXLIN, NEW YORK

MICROHM
WIRE WOUND RESISTORS

TYPE M • 1 WATT • NON-INDUCTIVE
. . . COMPLETE OR ROUGH WOUND

Available in resistance range from .05 to 500,000 Ohms—as a complete unit of standard accuracy of 1% or rough wound to approximately 3% accuracy. Easily calibrated to requirements.

Mounting through center hole to clear 6/32" screw; terminals hot tinned copper. Full details and prices on request.

PRECISION RESISTOR COMPANY

332 BADGER AVE. **NEWARK, N. J.**

Manufacturers of custom built PRECISION and INDUSTRIAL WIRE WOUND RESISTORS

LEACH LR RELAYS

ALWAYS ON THE JOB GIVING

DEPENDABLE OPERATION

The new Leach Impulse Relays make possible many new developments such as new circuits, new lock-out schemes—alarm systems and safety devices. Operation is dependable, absolutely quiet, and fast . . . time required to shift from one position to the other is approximately 1/60 second.



LEACH RELAY COMPANY
5915 Avalon Boulevard, Los Angeles, Calif.
15 E. 26th St., New York City

LEACH RELAY CO., 5915 AVALON BOULEVARD, LOS ANGELES, CALIF.

Please send me your new catalog. I am interested in ..... relay.

Name .....

Company .....

Address ..... City .....

Resistance Welding Process

NOW COMMERCIALLY available from General Electric Co., Schenectady, is the new resistance welding process of an electronic type to replace expensive soldering operations in the manufacture of radio sets, watches, industrial con-

trol devices, etc. A current of several thousand amps. flows in the secondary circuit of the welder for a half-cycle, which is precisely timed by an ignitron tube and its associated control circuit. A dial for regulating the heat by the phase shifting method is provided.

Nilver Alloy

NILVER, A nickel-iron alloy of low thermal expansion produced by Driver-Harris Co., Harrison, N. J., is finding important applications in present-day radio components. Useful for radio tubes wherein low expansion members are desired.

Resistors

GOOD CHARACTERISTICS at 75 megacycles and up are made possible in the newly developed type MP resistors of International Resistance Co., Philadelphia, through adaptation of their metallized coating applied to a ceramic tube. Available in 5 standard sizes in lengths from 3 to 18½ in. Power ratings are 5, 10, 25, 50, and 150 watts with resistance values from 5 ohms to 1000 megohms.

TYPE MV has also been announced. Voltages up to 100,000 at 150 watts and greater on a 18½ x 2 in. tube are practical. Five standard units rated at 5,000, 10,000, 25,000, 50,000 and 100,000 volts are available. Engineering data Folder No. 2 describes this resistor in detail.

Kit Receiver

THE 83 KIT RECEIVER of Browning Laboratories, Inc., Winchester, Mass., covers a band of frequencies from 540 to 2200 kc. in 4 bands to make a receiver of, and has extremely low noise level, high sensitivity and high quality

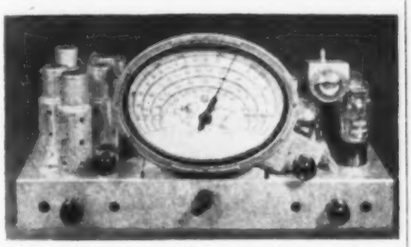

reproduction. A series of amateur tuners covering 10, 20, 40, 80 and 160 meter bands are also available. The tuners are all band switching assemblies with electrical band spread. Full sized wiring diagrams are furnished with the kit.

Volt Ohm Milliammeter

MODEL 4922, "JUMBO" voltmeter and milliammeter is a new product of Hickock Electrical Instrument Co., Cleveland, O. It has a large scale suitable for classroom demonstration purposes. Meter sensitivity is 350 micro-amps. A wide variety of a-c and d-c current and voltage ranges is available.

Welding Contactor

AN A-C IGNITRON, without timing, is the new Weld-O-Trol of Westinghouse Electric & Mfg. Co., East Pittsburgh. Suitable for use with existing timing devices, it will handle applications where difficulty of switching the welding machine current is involved. WL-652 and WL-657 tubes give a rating for spot welding approximately that of a 300 amp. contactor, and the WL-651 and WL-656 tubes roughly approximate the rating of a 600 amp. contactor. Descriptive Data 18-345 is available.

Filterette

TYPE R-1 OF Tobe Deutschmann Corp., Canton, Mass., is a unit designed to effectively overcome radio interference created by electric shaving devices. It is listed by Underwriters Laboratories.

Crystal Phonograph Pickup

THE NEW "STANDARD" Mellotone Series X-78 is designed with a tone arm to minimize tracking errors down to 3 or 4%. A full lift hinge facilitates needle insertion. The low list price will appeal to service men and dealers in replacing old types of phonograph pickups on record players and radio phonograph combinations. Webster Electric Co., Racine, Wis.

★ THE KIND YOU WANT . . .
★ AS YOU REQUIRE THEM . .
★ SHIPPED WITHOUT DELAY

THERE may be larger manufacturers of RELAYS . . . but GUARDIAN gives you exactly what you want *when* you want it. Hard to believe, maybe, but orders are frequently shipped the same day—and *built to customers specifications* too. The orders of every customer "rate" equally here—attention is not concentrated on one or two big customers. No matter who you are, or the size of your order, you'll get *good service —fast service*—when you order

RELAYS BY GUARDIAN

Relay illustrated is the Series 150. Hundreds of other types, and variations, available.
Write for our catalog "E," or send specifications and let us quote.



Model 150 Relay
When ordering specify current, voltage or resistance of coil, contact combination and load through contacts.

GUARDIAN G ELECTRIC
1625 W. WALNUT STREET CHICAGO, ILLINOIS

BLILEY

CRYSTALS

The complete Bliley line includes ovens, holders and crystals for all frequencies from 20 kc. to 30 mc. Several new units have recently been developed for high frequency mobile work. Write today for Catalog G-10 for full description.

BLILEY ELECTRIC COMPANY
UNION STATION BUILDING ERIE, PA.

The ultimate in Radiation
WILBUR B. DRIVER CO.
NEWARK, NEW JERSEY

CALLITE

TUNGSTEN — MOLYBDENUM

Grids
Plates
Cathodes
Copper-clad
Formed Parts
Hooks and Pigtails
Trimet Lead-in Wire
Tungsten Filament Wire
Molybdenum Anchor Wire
Special Filament Springs
Two and Three-Piece Welds for Hard and Soft Glass

We maintain a competent staff of engineers ever at your service to assist you. Write for additional information and let us help you with your problems.

CALLITE PRODUCTS DIVISION
EISLER ELECTRIC CORPORATION
544-39th STREET — UNION CITY, N. J.

Voltage-Dropping Power Cords

A LINE OF voltage-dropping power cords either for initial or for replacement use with a-c or d-c sets is announced by Clarostat Mfg. Co., Inc., 285 N. 6th St., Brooklyn, N. Y. Each cord is made up of three conductors enclosed in heavy braided covering.

Visitron Phototubes

NEW ADDITIONS to the Visitron series of G-M Laboratories, 1731 Belmont Ave., Chicago, are two new barrier type cells having twice the output of preceding units. When desired, both cells can



be supplied with visual filters to give them a color response equivalent to that of the human eye. Bulletin CS604 describes them in detail.

PLUGS — SOCKETS
TERMINAL PANELS, ETC.

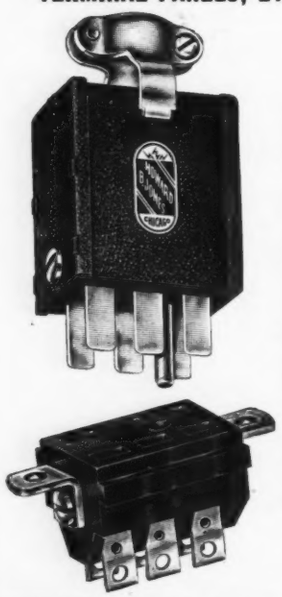

ILLUSTRATED
PLUG: P-6-CCT—SOCKET: S-6-AB

HUNDREDS OF STANDARD ITEMS OR SPECIALS TO YOUR BLUE-PRINTS.
WRITE FOR BULLETINS.
HOWARD B. JONES
2300 Wabansia Avenue
CHICAGO — ILL.

SHALLCROSS
RESISTORS, SWITCHES and INSTRUMENTS

Our products have established an enviable reputation in many of the industrial and college laboratories in this country and abroad.

Write for Bulletin 140-KD
SHALLCROSS MFG. CO.
COLLINGDALE, PA.

Hermetically Sealed in oil and glass!

For stability and accuracy

in instruments of precision

CONTINENTAL **A1** precision carbon resistors in tolerances of ±2, 3, or 5%

CONTINENTAL CARBON Inc.
13906 Lorain Ave., Cleveland, Ohio
and Toronto, Ontario

Measuring Electrical Impulses

RAYTIMER IS a new instrument of Raytheon Mfg. Co., Waltham, Mass. The time during which an a-c circuit is energized is shown directly on a meter scale. It may be calibrated in either cycles or seconds and has a range of 1/120 of a second to 30 seconds, the accuracy being plus or minus 5%. Some of its applications are: Checking welder and X-Ray exposure timing; measuring the closing and opening time of relays and contactors, measuring time periods and speeds of mechanisms having electrically actuated sequences, etc.

Exponential Speaker

PM REPRODUCER AND talk-back unit known as "Marine Midget" suitable for all types of indoor and outdoor intercommunication systems is a new item of Atlas Sound Corp., 1451 39th St., Brooklyn, N. Y. The specifications are: permanent magnet type, 7 oz.; power 5 watts; voice coil impedance 3.2 ohms

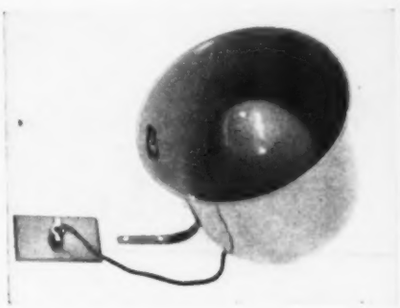

at 400 cycles; frequency response from 100 to 5000 cycles; overall size of complete speaker—bell opening 10 in. in diameter; overall depth, 8 in. The speaker is completely protected from mechanical damage as well as adverse weather conditions.

Tube Tester

PRECISION Apparatus Corp., 821 E. New York Ave., Brooklyn, N. Y., announces their new Series 900 dynamic mutual conductance tube tester. It is push button operated and has four re-



sistance ranges, four decibel ranges, four output ranges as well as paper condenser leakage test. Provision is made for measuring leakages of all types of electrolytic condensers.

SPEAKERS BUILT TO YOUR SPECIFICATIONS

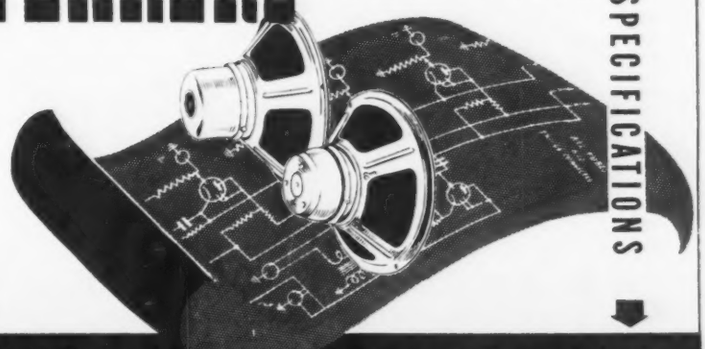

NEXT to lasting dependability, what engineers like most about CINAUDAGRAPH speakers is the versatility of the line. They know that if CINAUDAGRAPH doesn't have a unit to fit their needs, CINAUDAGRAPH will build it for them . . . build it soundly, thoroughly, exactly to SPECIFICATION. Take advantage of this exclusive service, and get the extra-value of exclusive design, specialized engineering and construction that CINAUDAGRAPH is able to offer at competitive prices. *Your inquiry is invited.*

Cinaudagraph speakers are now available in electrodynamics from 5" to 27" and P.M.'s from 5" to 18".

CINAUDAGRAPH CORPORATION

DEPT. 4J SPEAKER DIVISION
STAMFORD, CONNECTICUT

EXPORT DEPARTMENT
100 VARICK ST., NEW YORK

NEW Universal HAND TACHOMETER

"Jagabi" Type A Universal Hand Tachometer

Measures any speed from 30 to 40,000 r.p.m. (25 to 30,000 r.p.m. also available).

Only three ranges. Pointer turns twice around dial.

Equivalent to a six-range tachometer. Operates on centrifugal principle.

Direct-reading. Accurate. Dead beat. New mechanical features.

Write for Bulletin 1375-E and prices.

JAMES G. BIDDLE CO.
ELECTRICAL INSTRUMENTS
1211-13 ARCH STREET PHILADELPHIA, PA.

ASTATIC
PIONEER MANUFACTURERS OF QUALITY CRYSTAL DEVICES

New **MULTI-UNIT MICROPHONE** *with* **DUAL DIAPHRAGM** *Construction*

Designed especially for high class public address and recording purposes, Astatic's new MULTI-UNIT Microphone provides maximum amplification without feedback and cannot be acoustically overloaded. Made in two models: MU-2 with two dual diaphragm crystal units and four diaphragms and MU-4 with four dual diaphragm crystal units and eight diaphragms. Black and chrome. Complete with interchangeable locking connector and 25-ft. cable.

LIST PRICES
MU-2 $29.50 MU-4 $39.50

See your Astatic Jobber or Write for Literature

ASTATIC
Microphone Laboratory, Inc.
Youngstown, Ohio
Licensed Under Brush Development Co. Patents

Announcing

Walco SAPPHIRE CUTTING NEEDLES

Far superior to any cutting needle now on the market because

1. *Absolute uniformity*—Point is .002 radius, guaranteed accurate to 1/10,000th inch.
2. Perfect cutting edge—all other needles we can find show chipped edges under microscope.
3. Longer life—Walco Sapphire Needles will cut 2 to 10 times as many records, depending on conditions.

Send for bulletin in which microphotos and shadowgraphs show clearly the reasons for definite superiority of Walco Sapphire Needles

ELECTROVOX COMPANY
424 MADISON AVENUE · NEW YORK CITY
Cable Address: Walvox

SAPPHIRE WALCO

Introductory Offer—On your *1st* order we will ship free with each cutting needle one Walco Sapphire Playback needle, the only needle which can't injure acetate.

DEALERS WANTED

LIST PRICE *$5.00 each* · RESHARPENING *$1.30 net*

UNIDIRECTIONAL DYNAMIC D9T



BACK No Pickup
FRONT Full Coverage
VOLUME INCREASED by Reducing Feedback
D9T, List $37.50, High Imp., 25' Cable.
D9, List $35.00, Low Imp., 25' Cable.
Write for Catalogue #29
Manufacturers Full Line Dynamic, Crystal, and Carbon Microphones and Stands.

D3 DYNAMIC
List $90.00

AMERICAN MICROPHONE CO., INC.
1915 So. Western Ave. Los Angeles, Calif.

WAXES • COMPOUNDS • VARNISHES
for **ELECTRICAL INSULATION**

Zophar offers prompt service on Insulating Compounds for a wide variety of electrical applications, including:

. . . insulation for CONDENSERS, TRANSFORMERS, COILS, power packs, pot heads, sockets, wiring devices, wet and dry batteries, etc. Also WAX SATURATORS for braided wire and tape. WAXES for radio parts.

Special compounds made to your order.

ZOPHAR MILLS INC.
130-26th St. Brooklyn, N. Y.
FOUNDED 1846

Input Transformer

MODEL A216X, of Ferranti Electric Co., 30 Rockefeller Plaza, New York, is a new, light weight input transformer having electrostatic shields between primary and secondary windings. Technical data is: Primary 50/200, 125/500

ohms; secondary 15,000/60,000 ohms; operating level —80 to +20 db; primary unbalanced 4 ma.; primary current per leg 50 ma.; operation is from a line to a single or push-pull grid and the weight of the unit is 2 lbs.

Trouble Shooter

"TROUBLE SHOOTER" is manufactured by Radio City Products Co., 88 Park Place, New York City. It has a multi-scale D'Arsonval 0-1 milliammeter, accurate within 2%, and measures d-c volts up to 1000, d-c milliamperes, and resistance up to 500,000 ohms.

Field Strength Meter

A HANDY LOW priced instrument for the measurement of the field intensity of antennas on frequencies from 1750 to 60,000 kc. has been introduced by Radio Transceiver Laboratories, Richmond Hill, New York City. It employs a diode tube rectifier powered

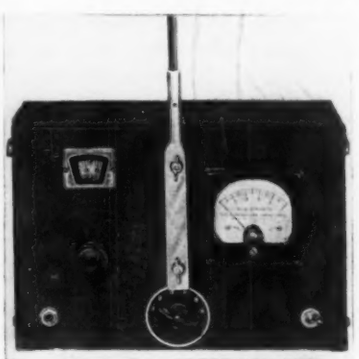

from a single dry cell mounted in the case. A wavechange switch for six bands and a phone jack for monitoring are provided. A damped meter indicates the relative radio frequency field strength.

Heavy Duty Relays

CAN BE FURNISHED for either a-c or d-c operation by Ward Leonard Electric Co., Mount Vernon, N. Y. Average coil consumption for d-c is 4 watts and for a-c is 7.5 watts. Contacts and insulation for breaking 30 amps. at 2500 volts.

New RCA Products

RADIO TUBE TESTER. A unit designed for simplicity of operation is Model 156-A. It is push button operated and has a roller chart for setting the controls. Gas, electron ray, ballast, and battery tubes, including the new 1½ volt types, may be tested, as well a one and two-in. cathode ray tubes. All tests according to RMA standards can also be made.

ANTENNA COUPLING TRANSFORMER, designated as 9849 makes possible the conversion of existing antenna installations to provide features of noise reducing antenna when used in conjunction with the proper coupling trans-



former. Up to 16 radios may be operated at one time from a single antenna using the new coupling unit together with associated distribution and receiver coupling transformers.

PORTABLE VICTROLA, designated as O-12 has also been announced. It features improved appearance and a new low price.

MOBILE SOUND UNIT. It is completely self-contained and operating from either 6 volt storage battery or 110 volt a-c power supply. It contains an amplifier, all input and output controls, and a phonograph turntable. Two 12-in. permanent magnet loud-speakers, a microphone, and all necessary cables and connections to place the system in operation complete the unit. RCA Mfg. Co., Camden, N. J.

Electric Plants

D. W. ONAN & SONS, 43 Royalston Ave., Minneapolis, Minn., announce new 2000 and 3000 watt a-c electric plants styled with the radiator on the forward end. Welded steel generators increase their efficiency. These are made in manual, self-starting and full automatic types. Mechanical details and specifications are available from the manufacturers.

A. F. RELAY

A sensitive instrument, actuated by audio frequencies, to control secondary circuits through other Sigma relays.

Allows telephonically applied sound to perform control functions. Poised movement assures uniform operation under all installation conditions. Adjustable sensitivity permits adaptation to wide range of service.

See Sigma Data Sheet No. 5 for details.

SIGMA INSTRUMENTS, INC.
388 Trapelo Road
BELMONT MASSACHUSETTS

SAVE
★ Lost program time
★ Expensive replacements
★ Initial cost
★ Space
WITH TYPE 174
COMPRESSED NITROGEN CONDENSER
WRITE FOR DESCRIPTIVE FOLDER
HEINTZ AND KAUFMAN LTD
SOUTH SAN FRANCISCO CALIFORNIA U.S.A.

Grid Control Rectifier Tube
EL C6J
XENON GAS FILLING

D.C. AMPERES OUTPUT	
Average	6.4
Peak	77
PEAK FOREWARD VOLTS	750
PEAK INVERSE VOLTS	1250
AVERAGE ARC DROP VOLTS	9
FILAMENT	
Volts	2.5
Amperes	18
OVERALL DIMENSIONS, inches	2 x 9

ELECTRONS, INC.
127 SUSSEX AVENUE
NEWARK, NEW JERSEY, U.S.A.

NEW PORTABLE PLAY-BACK

Plays 10, 12, 16 inch records. Operates on AC-DC current at dual speeds.

ATTENTION

Radio Stations, Advertising Agencies, Program Producers — Use this machine to sell prospects on their own ground. Its completeness and simple operation together with its new low price makes it desirable for everyone.

See Your Dealer or Write

SOUND PROJECTS COMPANY
3140 WEST WALTON STREET • CHICAGO

Little Refinements that Lead to Better Sets

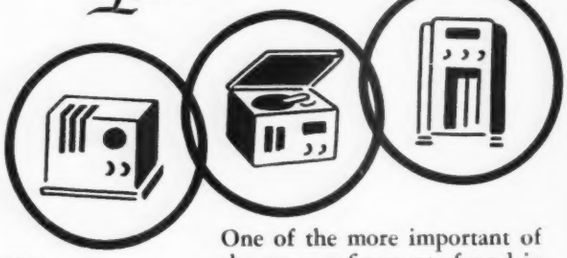

Features:

Sturdy Construction
Greater Stability
Improved Grounding
Complete Shielding
Better Appearance
Magnetic Shielding
Easy Assembly
Space Saving
Beaded Top
Economy

One of the more important of the many refinements found in modern radio sets is the tube shield. The new improved 1100 series Goat Form Fitting Tube Shield used on all types of 1939 models is the result of the best thinking of the industry's leading engineers.

Bulletins Available To Manufacturers

The New Improved 1100 Series GOAT Form-Fitting Tube Shield

GOAT RADIO TUBE PARTS

GOAT RADIO TUBE PARTS, INC.

(A DIVISION OF THE FRED GOAT CO., EST. 1893)

314 DEAN ST., BROOKLYN, N. Y.

Investigate -

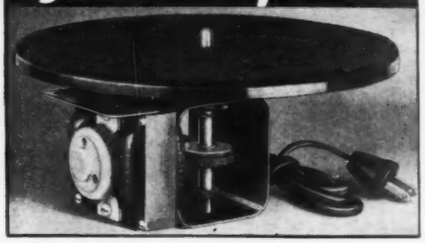

This New **"EVEN SPEED" PHONOGRAPH MOTOR**

- The new Alliance Self-starting "Even Speed" motor maintains proper record speed without the need of a governor, regardless of variations in record drag, line voltage or operating temperature.

Large bearings with ample oil reserves and laminated bakelite helical cut gears assure smooth, silent operation and long life. Motor design allows free ventilation and cooler operation. Motor dimensions are: Length 4-7/16"; Width 3¼"; Depth to bottom of motor board—2-13/16"; bottom of motor to top of spindle 4-11/32". Turn-table and motor (110 volt—60 cycle) furnished complete with rubber spools for mounting. Available with 9"-10" or 12" turn-tables.

For full information and prices write

ALLIANCE MANUFACTURING CO.
Alliance, O.

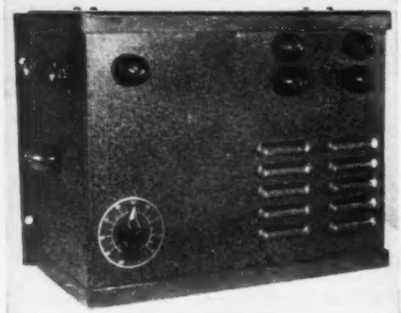

Balancing and Semi-Tuned Power Filters for All Power, Ignition and Antenna Circuits.

Units available for: Airplanes, airships, marine ships, fighting tanks, police radio, government and industrial research laboratories, colleges and many other uses.

- No shielding required
- Available in various capacities
- Light in weight
- Easy to install
- Efficient
- Inexpensive

Write for descriptive literature with prices.

A number of good territories open for reliable sales representatives.

WHISK LABORATORIES

145 West 45th St., New York, N. Y.

Bryant 9-5346

Patents

Patent Suits

1,544,081, F. K. Vreeland, Transmitting intelligence by radiant energy; 1,778,456, I. Langmuir, Means for producing alternating currents, D. C., S. D. Calif. (Los Angeles), Doc. E 745-(C) J, *R. C. A. et al.* v. *Globe Wireless, Ltd., et al.* Dismissed Apr. 1, 1938.

Re. 19,744, H. A. Wheeler, Volume control, D. C., N. D. Ill., E. Div., Doc. 14961, *Hazeltine Corp.* v. *Stewart-Warner Corp.* Consent order dismissing suit without prejudice Mar. 23, 1938. (To correct error formerly published as Re. 19,774).

1,623,996, P. S. Carter, Radio transmission system; 1,909,610, same, Electric circuit; 1,974,387, same, Antenna; 1,884,006, 1,927,522, N. E. Lindenblad, same, C. C. A., 2d Cir., Doc.—, *R. C. A.* v. *Mackay Radio & Telegraph Co., Inc.* Decree modified (notice May 2, 1938).

Re. 19,744, H. A. Wheeler, Volume control, D. C., E. D. Mich. (Detroit), Doc. 8322, *Hazeltine Corp.* v. *Sparks-Withington Co.* Consent decree dismissing bill without prejudice (notice Apr. 28, 1938).

1,811,099, L. W. Stonequist, Radio apparatus, D. C., N. D. Ill., E. Div., Doc. 11297, *L. W. Stonequist et al.* v. *Carter Radio Co.* Dismissed on plaintiff's motion with prejudice Apr. 29, 1938.

1,573,374, P. A. Chamberlain, 1,795,214, 1,707,617, E. W. Kellogg; 1,894,197, Rice & Kellogg; 2,052,316, R. E. Sagle, D. C., N. D. Ill., E. Div., Doc. 15955, *R. C. A. et al.* v. *B. Friedman et al.* (*Lake Sales Radio Co.*). Consent decree, finding patents valid and infringed, injunction Feb. 21, 1938.

1,710,073, 1,714,191, S. Ruben, Electrical condenser; 1,891,207, same, Electrolytic condenser, D. C., S. D. N. Y., Doc. E 76/400, *Ruben Condenser Co. et al.* v. *E. B. Latham & Co.* Dismissed without prejudice (notice May 5, 1938).

1,403,475, H. D. Arnold; 1,403,932, R. H. Wilson; 1,507,016, L. de Forest; 1,507,017, same; 1,811,095, H. J. Round; Re. 18579, Ballantine & Hull, D. C., N. D. Calif. (San Francisco), Doc. E 4079–S, *R. C. A. et al.* v. *L. D. Stark* (*Federal Radio & Television Co.*). Patents held valid and infringed, injunction May 16, 1938.

1,051,685, H. A. Wheeler, Peak detector; 2,041,273, same, Amplifier volume control, D. C. Md., Doc. E 2466. *Hazeltine Corp.* v. *General Electric Co. et al.* Dismissed without prejudice to the plaintiff May 20, 1938.

2,022,514, 1,913,604, W. A. MacDonald, Wave signaling system, D. C. Md., Docs. E 2466–E and 2467, *Hazeltine Corp.* v. *General Electric Co. et al.* Dismissed without prejudice as to plaintiff May 20, 1938.

"PINCOR" SILVER BAND DYNAMOTORS

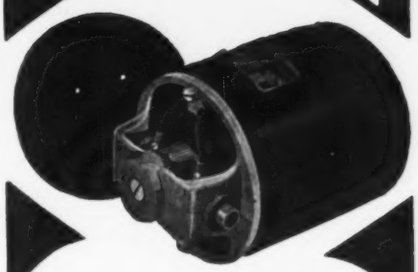

Now..Choose the Unit that Fits the Job..

★ "PINCOR" offers the only complete line of "B" power supply equipment for police units, aircraft and radio broadcast service and sound systems. Available in a wide range of frames, sizes and capacities to fit any particular requirement.

★ "PINCOR" dynamotors are the last word in efficiency and regulation. Deliver high voltage current for proper operation of your apparatus with a minimum of A.C. ripple. These units will give years of smooth, quiet, satisfactory service. They are compact, light weight. Available with or without filter.

NEW CATALOGUE FREE

Send for the latest "PINCOR" dynamotor catalogue and data sheets which includes description of the new types, "PS," "CS," and "TS" dynamotors. Mail coupon below.

PIONEER GEN-E-MOTOR CORPORATION
466 W. SUPERIOR ST., CHICAGO, ILL.
Export Address: 25 Warren St., N. Y., N. Y.
Cable: Simontrice, New York

Send for FREE Copy! Mail Coupon Today

PIONEER GEN-E-MOTOR CORPORATION
Dept. R-4J, 466 West Superior Street, Chicago, Illinois
Without obligation kindly send me "PINCOR" Silver Band Dynamotor catalogue and data sheets.

Name .....
Address .....
City ..... State .....

1,707,545, 1,992,268, E. C. Wente, Acoustic device; 2,037,187, same, Sound translating device; 1,734,624, H. C. Harrison, Piston diaphragm having tangential corrugations; 1,730,425, same, Acoustic device, D. C., S. D. Calif. (Los Angeles), Doc. E 1308–Y, *Western Electric Co., Inc.*, v. *Lansing Mfg. Co.* Dismissed without prejudice June 4, 1938.

1,350,752, H. J. Van der Bijl; 1,403,-475, H. D. Arnold; 1,448,550, same; 1,507,016, L. de Forest; 1,507,017, same; 1,531,805, R. C. Mathes; 1,592,934, R. V. Hartley; 1,596,198, S. Loewe; 1,823,-322, R. A. Heising; 1,966,065, R. Gunn; Re. 17,245, Re. 17,247, W. G. Cady; Re. 17,355, same, D. C., N. D. Calif. (San Francisco), Doc. E 3946–L, *R. C. A. et al.* v. *Heintz & Kaufman, Ltd.* Dismissed Mar. 30, 1938.

1,356,763 (a), R. V. Hartley; 1,403,-475, H. D. Arnold; 1,465,332, same; 1,520,994, same; 1,403,932, R. H. Wilson; 1,507,016, L. de Forest; 1,507,017, same; 1,936,162, H. A. Heising, D. C., S. D. Calif. (Los Angeles), Doc. E 742–J, *R. C. A. et al.* v. *Globe Wireless, Ltd., et al.* Dismissed Apr. 1, 1938.

1,356,763 (b), R. V. Hartley; 1,403,-932, R. H. Wilson; 1,465,332, H. D. Arnold; 1,520,994, same; 1,447,773, Espenschied & Brown; 1,507,016; L. de Forest; 1,507,017, same; 1,544,081, F. K. Vreeland; 1,869,323, P. H. Evans; 1,890,302, W. Runge; 1,896,780, F. B. Llewellyn; 1,936,162, R. A. Heising; Re. 18,579, Ballantine & Hull; Re. 18916, J. G. Aceves, D. C., N. D. Calif. (San Francisco), Doc. E 3945–L, *R. C. A. et al.* v. *Heintz & Kaufman, Ltd.* Dismissed Mar. 30, 1938.

1,938,092, 2,002,844, Amy & Aceves, Radio receiving system; Re. 19,854, same, Duplex radio aerial system, filed May 27, 1938, D. C., S. D. N. Y., Doc. E 87/113, *Amy, Aceves & King, Inc.*, v. *Birnbach Radio Co., Inc.*

• • •

SERVICE FOR SAILORS

Twenty-four hour radio service on 2514 kc. is offered to all sailors, on Lake Michigan, amateur or professional, by station WAY, above, owned by a Chicago publisher. Subscribers to the service are provided with a transmitter which is installed on the boat and operates at a fixed frequency of 2118 kc.

SENSITIVE ELECTRONIC AC VOLTMETER
MODEL 300

- New operating principle.
- 10-100,000 cycles.
- 1 millivolt to 100 volts in five ranges (to 1,000 and 10,000 volts with multiplier).
- Logarithmic voltage scale and uniform decibel scale.
- A-C operation, 115 or 230 volts, 50-60 cycles (rack mounting and battery-operated models also available).
- Permanent calibration, unaffected by variation in line voltage, tubes, etc. Accuracy 2%.
- Can also be used as an amplifier (70 DB gain) flat to 100,-000 cycles.

MODEL 402
MULTIPLIER

Newest addition to a line of accessories designed to increase the utility of the Model 300 Voltmeter. This multiplier has two important uses: (1) to provide additional ranges of 1,000 and 10,000 volts full scale, and (2) to increase the input impedance so that, when full sensitivity is not required, measurements may be made on very high impedance circuits. The input impedance on the 1,000-volt range is 4.4 megohms and on the 10,000-volt range 44 megohms.

Send for Bulletin 2E.

Ballantine Laboratories, Inc.
BOONTON NEW JERSEY

¶ ENGINEERS and experimenters are very enthusiastic about this instrument. Sturdy and precision built. Handy for laboratory, shop or field use.

The HANDIEST TESTER of all!

MODEL 666

DEALER NET $15.00

POCKET VOLT-OHM-MILLIAMMETER

● A complete instrument for all A.C.-D.C. voltage, current and resistance analyses.

Model 666 has 3" Sq. Triplett improved rectifier type instrument. A.C.-D.C. Voltage Scales read: 10-50-250-500-1000 at 1000 Ohms per volt. D.C. Milliampere Scale reads: 1-10-50-250. Ohms Scales read: Low ½-300; High 250,000. Resistance range can be increased by adding external batteries. Size 3-1/16" x 5⅞" x 2⅛". Black Molded Case and Panel. Low Loss Selector Switch. Complete with Alligator Clips. Battery and Test Leads. Dealer price, $15.00.

Attractive heavy black leather carrying case with finished edges and strap. Model 669, supplied extra. Dealer price, $3.67.

EXCLUSIVE TRIPLETT LOW LOSS SWITCH

Installed in Model 666. Uses two silvered contacts instead of one, insuring lower contact resistance. On actual breakdown test, on and off operation exceeded 10 million times without failure.

Write for Catalog!

TRIPLETT Precision ELECTRICAL INSTRUMENTS

The Triplett Electrical Instrument Co.
2310 Harmon Dr., Bluffton, Ohio

Please send me ☐ information on Model 666; ☐ Triplett catalog.

Name .....

Address .....

City..... State.....

1,573,374, P. A. Chamberlain; 1,795,214, 1,707,617, E. W. Kellogg; 1,894,197, Rice & Kellogg; 1,728,879, same, D. C., N. D. Calif. (San Francisco), Doc. E 4078–R, *R. C. A. et al.* v. *L. D. Stark (Federal Radio & Television Co.)*. Patents held valid and infringed, injunction May 16, 1938.

1,455,141, Lowell & Dunmore, Radio receiving apparatus; 1,606,212, same, Power amplifier; 1,635,117, same, Signal receiving system, C. C. A., 4th Cir., Doc. 4261, *P. D. Lowell et al.* v. *A. G. Triplett et al.* Decree affirmed insofar as it dismisses bill with respect to 1,455,141 and 1,635,117, and reversed insofar as it sustains validity of 1,606,212 June 11, 1938.

1,329,283, 1,398,665, H. D. Arnold, Thermionic amplifier; 1,349,252, same, Method of and means for utilizing thermionic currents; 1,403,475, same, Vacuum tube circuit; 1,448,550, same, Thermionic amplifier circuit; 1,465,332, same, Vacuum tube amplifier; 1,520,994, same, Electron discharge amplifier; 1,453,982, B. W. Kendall, Electrical receiving or repeating apparatus and method of operating same; 1,493,595, D. G. Blattner, Amplifying with vacuum tubes; 1,544,921, R. C. Mathes, Amplifier circuit, D. C. Minn., 4th Div., Doc. E 2804, *Western Electric Co., Inc., et al.* v. *Cinema Supplies, Inc., et al.* Consent decree for plaintiffs as to 1,329,283, 1,398,665, 1,403,475, 1,453,982, 1,465,332 and 1,520,994, injunction May 28, 1938. Bill dismissed as to 1,349,252, 1,448,550, 1,493,595 and 1,544,921, Dec. 3, 1936.

Adjudicated Patents

(C. C. A. N. Y.) Crossley patent, No. 1,694,341, for magnesium compound and process of producing the same, claims 1 and 3 *Held* invalid. *Plant Products Co.* v. *Charles Phillips Chemical Co.*, 96 F.(2d) 585.

(C. C. A. N. Y.) Lindenblad patent, No. 1,927,522, for antenna for radio communication, claims 9, 10, 19, and 23 *Held* not infringed. *Radio Corporation of America* v. *Mackay Radio & Telegraph Co.*, 96 F.(2d) 587.

PROFESSIONAL SERVICES

ELECTRICAL TESTING LABORATORIES
Characteristics *of Vacuum Tubes*
Tests of photo cells, glow lamps, crater lamps.
Tests of electronic and optical devices.
East End Avenue and 79th Street
New York, N. Y.
Phone: Butterfield 8-2600

ELECTRONIC DEVELOPMENTS CORPORATION
Research and Development in Electronics and Radio Communication
983 National Press Building
Washington, D. C.

INTERNATIONAL ELECTRONICS, INC.
AMERICAN CONSULTING ENGINEERS TO FOREIGN MANUFACTURERS
Designs ..... Specifications
Electrolytics ..... Tubes ..... Resistors
Transmitters ..... Receivers
630 Fifth Avenue New York, N. Y.
Cable:—Interengin, New York

HAROLD J. McCREARY
Mem. A.I.E.E. & W.S.E.
Consulting Engineer
Laboratory Facilities
Research — Electronics
Development — Television
Design — Radio
Factory Practise — Railroad Signaling
Patent Studies — Telephony
105 W. Adams St. Phone STAte 4003 Chicago, Ill.

RADIO DEVELOPMENT & RESEARCH CORP.
CONSULTANTS AND DESIGNERS
including
Amplifiers—Antennas—Transmitters
Receivers—Laboratory Equipment
Special equipment designed and constructed
145 West 45th Street, New York, N. Y.
Tel. BRyant 9-6898

ROWE RADIO RESEARCH LABORATORY CO.
DOMESTIC SECTION
Development Engineers of Radio Receivers Allied Apparatus and Components.
Designers and Constructors of Special Equipment.
Complete Laboratory Facilities.
1103 Bryn Mawr Ave. Chicago, Illinois
Telephones—Longbeach 3163—3164

ROWE RADIO RESEARCH LABORATORY CO.
FOREIGN SECTION
Engineering Information Specialists and Consultants.
Complete Laboratory at Disposal of Clients.
Current Radio Receiver Characteristics Available.
Sales, Patent and License Negotiation Intermediaries.
1103 Bryn Mawr Ave. Chicago, Illinois, U.S.A.
Cable Address—RORADLAB CHICAGO



CETRON PHOTOCELLS

Set a Standard
By Which All Photo Tubes Are Judged

76 DIFFERENT TYPES AVAILABLE

OUR ENGINEERING DEPARTMENT IS ALWAYS READY TO ASSIST YOU IN YOUR DEVELOPMENTS.

Write for Literature

CONTINENTAL ELECTRIC COMPANY
HAMILTON AND RICHARDS STREETS, GENEVA, ILL.